
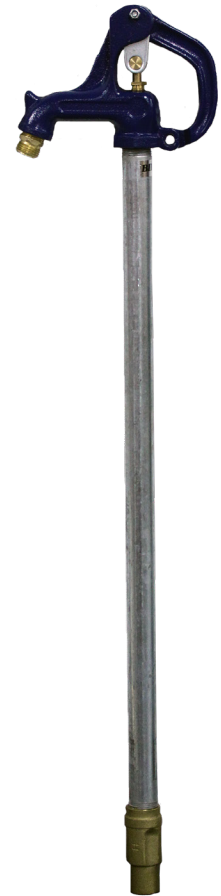


# YHS SERIES NO LEAD STANDARD YARD HYDRANT

## SPECIFICATION:


- Durable head with bucket hook and removable 3/4" GHT connector
- Large handle with locking eye
- Double o-ring sealing system for positive seal between hydrant head and operating rod
- Easy adjustment of linkage without disassembly
- Good drainage with self draining bleeder port to prevent freezing
- 1" Galvanized Stand Pipe
- 3/8" Steel Connecting Rod & Coupling
- Max Pressure: 125 PSI
- Max Temperature: 120°F (48°C)



## CERTIFICATION:

- NSF/ANSI Standard 372 Third Party Certified

MATERIAL LIST	
Part Name	Material
Fulcrum Bolt	Zinc Plated Steel
Fulcrum Nut	Zinc Plated Steel
Handle	Iron
Head	Iron
Link	Zinc Plated Steel
Connector	Brass
Set Screw	Zinc Plated Steel
Packing Nut	Brass
O-Ring	Rubber
Upper Clevis Rod	Brass
Hose Connector	Brass
Lower Clevis Rod	Steel
Pipe	Galvanized Steel
Bottom Valve	Brass
Plunger	Rubber
Insert	Brass
Coupling	Zinc Plated Steel

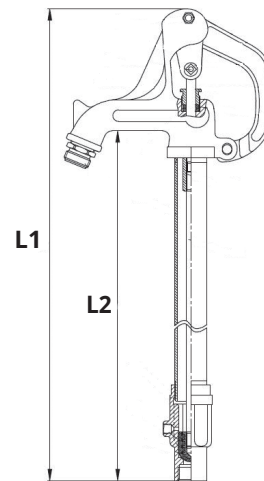

DIMENSIONS						
Part No.	Bury Length	L1		L2		Weight grams
		inches	mm	inches	mm	
YHS-01NL	1'	39.00	990.60	34.00	863.60	5000
YHS-02NL	2'	51.00	1295.40	46.00	1168.40	5750
YHS-03NL	3'	63.00	1600.20	58.00	1473.20	6500
YHS-04NL	4'	75.00	1905.00	70.00	1778.00	7425
YHS-05NL	5'	87.00	2209.80	82.00	2082.80	8250
YHS-06NL	6'	99.00	2514.60	94.00	2387.60	9075



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0  
Tel: 800-561-3164

[boshart.com](http://boshart.com) ♦ [blog.boshart.com](http://blog.boshart.com)