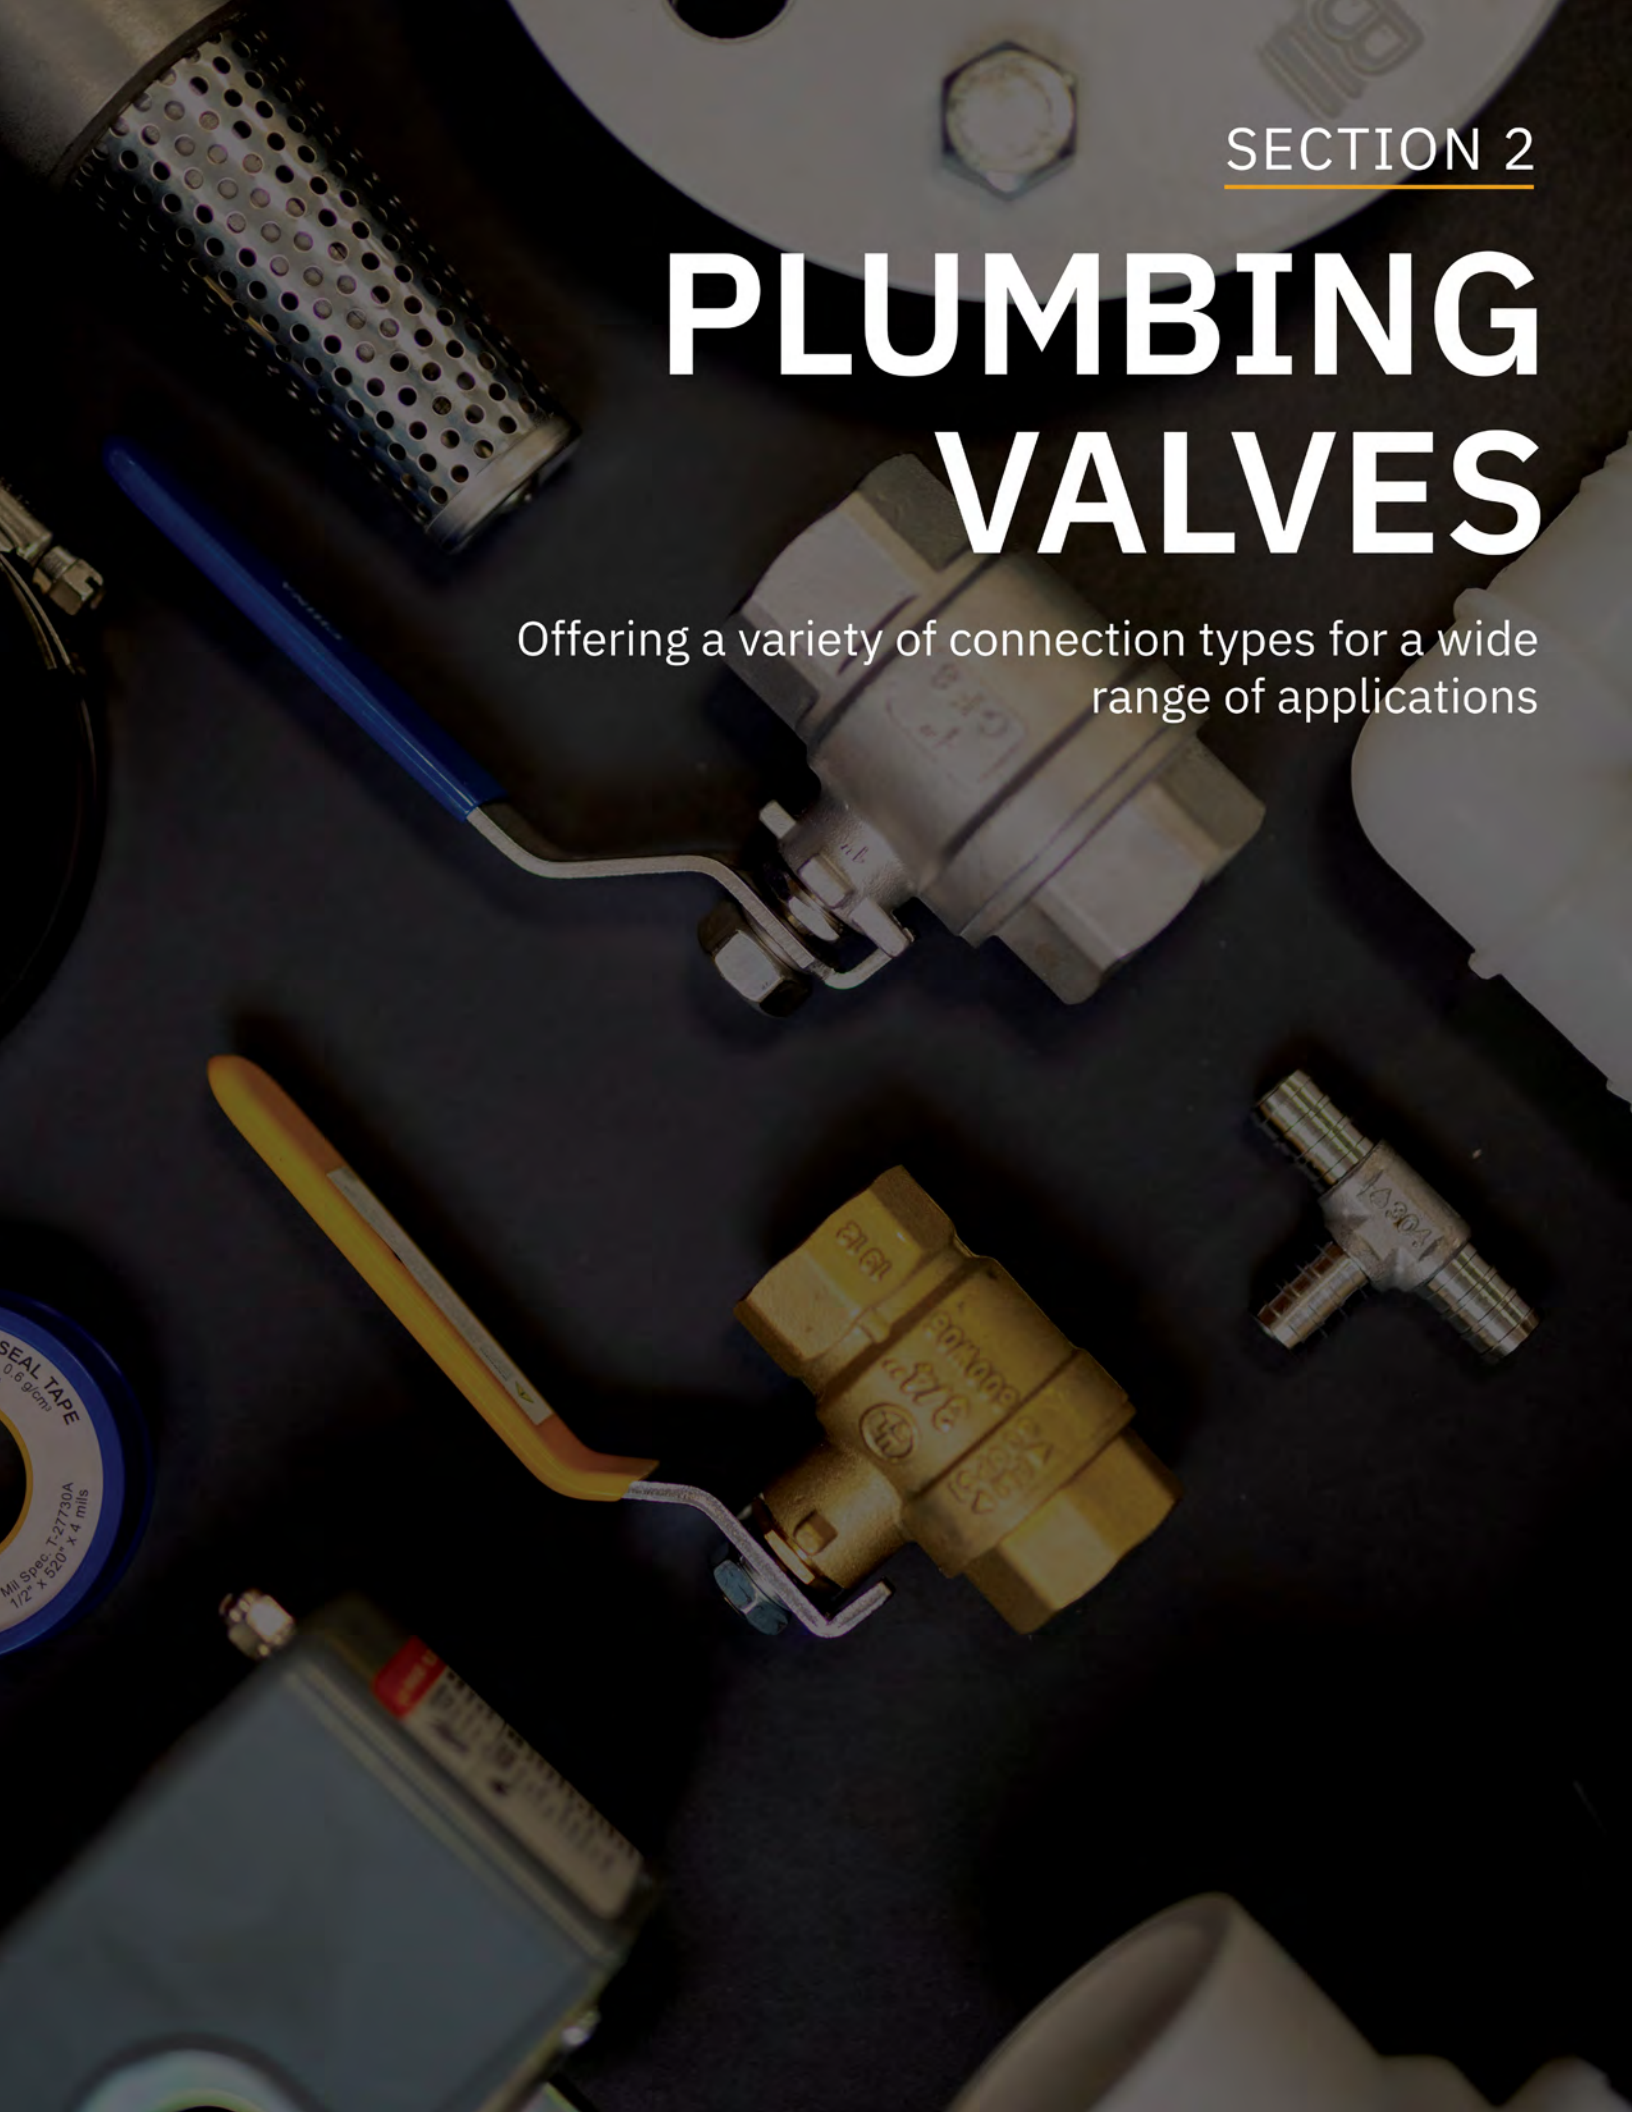


A top-down view of various plumbing components and tools arranged on a dark, textured surface. In the upper left, there is a cylindrical metal mesh filter. Below it, a blue-handled tool, possibly a valve actuator, is visible. In the center, a large, white, rectangular valve with a blue handle is prominent. To its right, a smaller, brass-colored valve is shown. Below the white valve, a yellow-handled tool is visible. In the bottom left, a roll of blue seal tape is partially unrolled, showing its dimensions. Other smaller brass fittings and a grey rectangular component are also visible in the lower portion of the image.

SECTION 2

# PLUMBING VALVES

Offering a variety of connection types for a wide  
range of applications

**INDEX**

| <b>Product Line</b>                            | <b>Page</b> |
|------------------------------------------------|-------------|
| Brass Gate Valves                              | 1           |
| Mini Brass Ball Valves                         | 2           |
| Brass Ball Valves                              | 2           |
| Brass Ball Valves with Drain                   | 6           |
| Brass Ball Valves - Locking Handle             | 7           |
| Stainless Steel Ball Valves                    | 8           |
| Cold Expansion PEX Stainless Steel Ball Valves | 9           |
| PVC Ball Valves                                | 9           |
| Premium PVC Ball Valves                        | 10          |
| Gas Ball Valves                                | 13          |
| Bent Nose Garden Valves                        | 14          |
| Hose Bibbs / Sampling Faucets                  | 15          |
| No-Kink Hose Bibbs                             | 16          |
| Brass Sillcocks                                | 16          |
| Sediment Faucets / Boiler Drains               | 17          |
| Stop / Stop & Waste Valves                     | 18          |
| Chrome Plated Non-Freeze Lawn Faucets          | 18          |
| Vacuum Breakers                                | 20          |
| Chrome Plated Supply Stops                     | 21          |
| Ice Maker Chrome Plated Supply Stops           | 22          |
| Washing Machine Chrome Plated Supply Stops     | 22          |

### BRASS GATE VALVES

Brass gate valves are used to shut off water supply. They are an excellent choice where this needs to be done slowly by turning the black hand wheel. No lead options are available for potable water applications.

| Part No. | Size | Port Size | Quantity |    |
|----------|------|-----------|----------|----|
|          |      |           | L1       | L2 |



#### Full Port Brass, Stem Packing Material: PTFE, Black Cast Hand Wheel Handle FPT Connection

Temperature Range: Up to 150°F (66°C), Maximum Pressure: 200 PSI CWP

• NSF/ANSI Standard 61 & 372 Certified

|           |        |       |    |     |
|-----------|--------|-------|----|-----|
| 0818-02NL | 1/4"   | 0.43" | 10 | 120 |
| 0818-03NL | 3/8"   | 0.47" | 10 | 120 |
| 0818-05NL | 1/2"   | 0.53" | 10 | 120 |
| 0818-07NL | 3/4"   | 0.75" | 10 | 80  |
| 0818-10NL | 1"     | 0.98" | 5  | 60  |
| 0818-12NL | 1-1/4" | 1.26" | 5  | 40  |
| 0818-15NL | 1-1/2" | 1.50" | 5  | 30  |
| 0818-20NL | 2"     | 1.93" | 2  | 20  |
| 0818-25NL | 2-1/2" | 2.44" | 2  | 12  |
| 0818-30NL | 3"     | 2.95" | 8  |     |
| 0818-40NL | 4"     | 3.62" | 4  |     |



#### Full Port Brass, Stem Packing Material: PTFE, Black Cast Hand Wheel Handle CxC Connection

Temperature Range: Up to 150°F (66°C), Maximum Pressure: 200 PSI CWP

• NSF/ANSI Standard 61 & 372 Certified

|            |        |       |    |     |
|------------|--------|-------|----|-----|
| 0818C-05NL | 1/2"   | 0.53" | 10 | 120 |
| 0818C-07NL | 3/4"   | 0.75" | 10 | 80  |
| 0818C-10NL | 1"     | 0.98" | 5  | 60  |
| 0818C-12NL | 1-1/4" | 1.26" | 5  | 40  |
| 0818C-15NL | 1-1/2" | 1.50" | 5  | 30  |
| 0818C-20NL | 2"     | 1.93" | 2  | 20  |



#### Full Port Brass, Stem Packing Material: PTFE, Black Cast Hand Wheel Handle FPT Connection

Temperature Range: Up to 150°F (66°C), Maximum Pressure: 200 PSI CWP

|         |        |       |    |     |
|---------|--------|-------|----|-----|
| 0818-05 | 1/2"   | 0.53" | 10 | 120 |
| 0818-07 | 3/4"   | 0.75" | 10 | 80  |
| 0818-10 | 1"     | 0.98" | 5  | 60  |
| 0818-12 | 1-1/4" | 1.26" | 5  | 40  |
| 0818-15 | 1-1/2" | 1.50" | 5  | 30  |
| 0818-20 | 2"     | 1.93" | 2  | 20  |
| 0818-25 | 2-1/2" | 2.44" | 2  | 12  |
| 0818-30 | 3"     | 2.95" | 8  |     |
| 0818-40 | 4"     | 3.62" | 4  |     |

Contact your sales rep for any further information

Toll Free: 1-800-561-3164  
boshart.com

### MINI BRASS BALL VALVES

These ball valves are designed as an easy shut off in 1/4" or 1/8" pipe applications. They are no lead and can be used for potable water applications.



| Part No. | Size | Port Size | Quantity |    |
|----------|------|-----------|----------|----|
|          |      |           | L1       | L2 |

**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Tee Handle**  
**FPT Connection**

Temperature Range: Up to 180°F (82°C), Maximum Pressure: 600 PSI CWP  
 • NSF/ANSI Standard 372 Certified

|           |      |       |    |     |
|-----------|------|-------|----|-----|
| 0828-01NL | 1/8" | 0.30" | 20 | 200 |
| 0828-02NL | 1/4" | 0.30" | 20 | 200 |



**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Tee Handle**  
**MPT x FPT Connection**

Temperature Range: Up to 180°F (82°C), Maximum Pressure: 600 PSI CWP  
 • NSF/ANSI Standard 372 Certified

|               |             |       |    |     |
|---------------|-------------|-------|----|-----|
| 0828-01M01FNL | 1/8"        | 0.30" | 20 | 200 |
| 0828-01M02FNL | 1/8" x 1/4" | 0.30" | 20 | 200 |
| 0828-02M02FNL | 1/4"        | 0.30" | 20 | 200 |



### BRASS BALL VALVES

Boshart's Brass Ball Valves are an excellent choice for a variety of applications where there is low risk of corrosion. Most connections come in both a leaded and no lead version to accommodate for potable water.

| Part No. | Size | Port Size | Quantity |    |
|----------|------|-----------|----------|----|
|          |      |           | L1       | L2 |



**Standard Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle**  
**Comp Connection**

Temperature Range: Up to 300°F (149°C), Maximum Pressure: 200 PSI CWP  
 • NSF/ANSI Standard 61 & 372 Certified  
 • cUPC Standard IGC 157 Certified

Note: Can be used to make connections between Copper, Brass, Aluminum, Plastic, CPVC & Pex tubing. Not recommended for use with steel tubing, designed for use with tube manufactured to CTS-OD tubing.

|              |      |       |    |     |
|--------------|------|-------|----|-----|
| 082CPND-05NL | 1/2" | 0.59" | 10 | 100 |
| 082CPND-07NL | 3/4" | 0.78" | 10 | 60  |
| 082CPND-10NL | 1"   | 0.98" | 6  | 30  |



**Standard Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle**  
**PEX Connection**

Temperature Range: Up to 203°F (95°C), Maximum Pressure: 400 PSI CWP  
 • NSF/ANSI Standard 61 & 372 Certified  
 • cUPC Standard IGC 157 Certified

|            |      |       |    |     |
|------------|------|-------|----|-----|
| 0821P-03NL | 3/8" | 0.39" | 10 | 120 |
| 0821P-05NL | 1/2" | 0.39" | 10 | 120 |
| 0821P-07NL | 3/4" | 0.59" | 10 | 90  |
| 0821P-10NL | 1"   | 0.79" | 6  | 30  |



Contact your sales rep for any further information

Toll Free: 1-800-561-3164  
 boshart.com

Rev. 5.6

### BRASS BALL VALVES



Part No.                      Size                      Port Size                      Quantity  
L1                      L2

**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE,  
Ball Material: Stainless Steel, PVC Handle  
FPT Connection**

Temperature Range: -20°F to 300°F (-29°C to 149°C),

- NSF/ANSI Standard 61 & 372 Certified
- IAPMO/ANSI Z1157 Certified – replaces IGC 157 (1/2"-2" only)
- CSA Listed to ANSI Z21.15 & CGA 9.1
- CSA Listed to ASME B16.44 & CGA/CR91-002
- CSA Listed to CAN/CGA 3.16
- CSA Listed to ASME B16.33
- Working Pressure 600 WOG



|           |        |       |    |     |
|-----------|--------|-------|----|-----|
| 0825-02NL | 1/4"   | 0.39" | 12 | 120 |
| 0825-03NL | 3/8"   | 0.39" | 12 | 120 |
| 0825-05NL | 1/2"   | 0.59" | 10 | 100 |
| 0825-07NL | 3/4"   | 0.78" | 8  | 64  |
| 0825-10NL | 1"     | 0.98" | 6  | 30  |
| 0825-12NL | 1-1/4" | 1.26" | 6  | 24  |
| 0825-15NL | 1-1/2" | 1.57" | 4  | 16  |
| 0825-20NL | 2"     | 1.97" | 2  | 8   |



**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE,  
Ball Material: Stainless Steel, PVC Handle  
CxC Connection**

Temperature Range: -20°F to 300°F (-29°C to 149°C), Maximum Pressure: 600 PSI CWP

- NSF/ANSI Standard 61 & 372 Certified
- IAPMO/ANSI Z1157 Certified – replaces IGC 157 (1/2"-2" only)
- Working Pressure 600 WOG

|            |        |       |    |     |
|------------|--------|-------|----|-----|
| 0825C-05NL | 1/2"   | 0.59" | 10 | 100 |
| 0825C-07NL | 3/4"   | 0.79" | 8  | 64  |
| 0825C-10NL | 1"     | 0.98" | 6  | 30  |
| 0825C-12NL | 1-1/4" | 1.26" | 6  | 24  |
| 0825C-15NL | 1-1/2" | 1.58" | 4  | 16  |
| 0825C-20NL | 2"     | 1.97" | 2  | 8   |



**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE,  
Ball Material: Stainless Steel, PVC Handle  
FPT Connection**

Temperature Range: Up to 300°F (149°C), Maximum Pressure: 600 PSI CWP

- NSF/ANSI Standard 61 & 372 Certified
- cUPC Standard Z1157 Certified
- CSA listed to the following standards (1/4" - 2" only)
  - ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
  - ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
  - ASME B16.33 & CAN/CGA 3.16 : 125 PSIG (BRS125G / CAN 3.16)
- UL listed to the following standards (1/4" - 4" only)
  - UL 1477 (YQNZ): Compressed gas shutoff valves - 600 PSI (1/4" - 1") 250 PSI (2-1/2" - 4")
  - UL 842 (YRBX): Flammable liquid shutoff valves - 600 PSI (1/4" - 1") 250 PSI (2-1/2" - 4")
  - UL 842 (YRPV): Gas shutoff valves - 600 PSI (1/4" - 1") 250 PSI (2-1/2" - 4")
  - UL 842 (MHKZ): Manual valves - 600 PSI (1/4" - 1") 250 PSI (2-1/2" - 4")
  - UL 125 (YSDT): LP-Gas shutoff valves - 600 PSI (1/4" - 1") 250 PSI (2-1/2" - 4")
- FM Standard 1140 Certified (1/4" - 2" only)

|           |        |       |    |     |
|-----------|--------|-------|----|-----|
| 0827-02NL | 1/4"   | 0.39" | 12 | 120 |
| 0827-03NL | 3/8"   | 0.39" | 12 | 120 |
| 0827-05NL | 1/2"   | 0.59" | 10 | 100 |
| 0827-07NL | 3/4"   | 0.75" | 8  | 64  |
| 0827-10NL | 1"     | 0.98" | 6  | 30  |
| 0827-12NL | 1-1/4" | 1.25" | 6  | 24  |
| 0827-15NL | 1-1/2" | 1.57" | 4  | 16  |
| 0827-20NL | 2"     | 1.97" | 2  | 8   |
| 0827-25NL | 2-1/2" | 2.52" | 2  | 4   |
| 0827-30NL | 3"     | 2.95" | 4  |     |
| 0827-40NL | 4"     | 3.90" | 2  |     |

Contact your sales rep for any further information

Toll Free: 1-800-561-3164

boshart.com

### BRASS BALL VALVES



| Part No. | Size | Port Size | Quantity |    |
|----------|------|-----------|----------|----|
|          |      |           | L1       | L2 |

**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Stainless Steel, PVC Handle**  
**Cx Connection**

Temperature Range: Up to 300°F (149°C), Maximum Pressure: 600 PSI CWP

- NSF/ANSI Standard 61 & 372 Certified
- cUPC Standard z1157 Certified
- FM Standard 1140 Certified (1/2" - 2" only)

|            |        |       |    |     |
|------------|--------|-------|----|-----|
| 0827C-05NL | 1/2"   | 0.59" | 10 | 100 |
| 0827C-07NL | 3/4"   | 0.75" | 8  | 64  |
| 0827C-10NL | 1"     | 0.98" | 6  | 30  |
| 0827C-12NL | 1-1/4" | 1.25" | 6  | 24  |
| 0827C-15NL | 1-1/2" | 1.57" | 4  | 16  |
| 0827C-20NL | 2"     | 1.97" | 2  | 8   |
| 0827C-25NL | 2-1/2" | 2.52" | 2  | 4   |
| 0827C-30NL | 3"     | 2.95" | 4  |     |
| 0827C-40NL | 4"     | 3.90" | 2  |     |



**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, PVC Handle**  
**FPT Connection**

Temperature Range: Up to 300°F (149°C), Maximum Pressure: 600 PSI CWP

- cUPC Standard z1157 Certified
- CSA listed to the following standards (1/4" - 4" only)
  - ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
  - ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
  - ASME B16.33 & CAN/CGA 3.16 : 125 PSIG (BRS125G / CAN 3.16)
- UL listed to the following standards (1/4" - 4" only)
  - UL 1477 (YQNZ): Compressed gas shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2") 250 PSI (2-1/2" - 4")
  - UL 842 (YRBX): Flammable liquid shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2") 250 PSI (2-1/2" - 4")
  - UL 842 (YRPV): Gas shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2") 300 PSI (1-1/4" - 2") 250 PSI (2-1/2" - 4")
  - UL 842 (MHKZ): Manual valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2") 300 PSI (1-1/4" - 2") 250 PSI (2-1/2" - 4")
  - UL 125 (YSDT): LP-Gas shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2") 300 PSI (1-1/4" - 2") 250 PSI (2-1/2" - 4")
- FM Standard 1140 Certified (1/4" - 2" only)
- Stainless Steel Ball for sizes 1-1/4" to 4"

|         |        |       |    |     |
|---------|--------|-------|----|-----|
| 0827-02 | 1/4"   | 0.39" | 12 | 120 |
| 0827-03 | 3/8"   | 0.39" | 12 | 120 |
| 0827-05 | 1/2"   | 0.59" | 10 | 100 |
| 0827-07 | 3/4"   | 0.75" | 8  | 64  |
| 0827-10 | 1"     | 0.98" | 6  | 30  |
| 0827-12 | 1-1/4" | 1.25" | 6  | 24  |
| 0827-15 | 1-1/2" | 1.57" | 4  | 16  |
| 0827-20 | 2"     | 1.97" | 2  | 8   |
| 0827-25 | 2-1/2" | 2.52" | 2  | 4   |
| 0827-30 | 3"     | 2.95" | 4  |     |
| 0827-40 | 4"     | 3.90" | 2  |     |

Contact your sales rep for any further information

**Toll Free: 1-800-561-3164**  
**boshart.com**

Rev. 5.7

### BRASS BALL VALVES



| Part No. | Size | Port Size | Quantity |    |
|----------|------|-----------|----------|----|
|          |      |           | L1       | L2 |

**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE,  
Ball Material: Stainless Steel, Rubber Grip Handle**

**CxC Connection**

Temperature Range: Up to 300°F (149°C), Maximum Pressure: 600 PSI CWP

- cUPC Standard z1157 Certified
- FM Standard 1140 Certified (1/2" - 2" only)

|          |        |       |    |     |
|----------|--------|-------|----|-----|
| 0827C-05 | 1/2"   | 0.59" | 10 | 100 |
| 0827C-07 | 3/4"   | 0.75" | 8  | 64  |
| 0827C-10 | 1"     | 0.98" | 6  | 30  |
| 0827C-12 | 1-1/4" | 1.25" | 6  | 24  |
| 0827C-15 | 1-1/2" | 1.57" | 4  | 16  |
| 0827C-20 | 2"     | 1.97" | 2  | 8   |
| 0827C-25 | 2-1/2" | 2.52" | 2  | 4   |
| 0827C-30 | 3"     | 2.95" | 4  |     |
| 0827C-40 | 4"     | 3.90" | 2  |     |



**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE,  
Ball Material: Chrome Plated, Rubber Grip Handle**

**Push Fit Connection**

Temperature Range: Up to 200°F (93°C), Maximum Pressure: 200 PSI

- NSF/ANSI Standard 61 & 372 Certified
- ASSE Standard 1061 Certified

|            |      |       |    |     |
|------------|------|-------|----|-----|
| 082PF-05NL | 1/2" | 0.63" | 10 | 120 |
| 082PF-07NL | 3/4" | 0.88" | 10 | 60  |
| 082PF-10NL | 1"   | 1.13" | 6  | 30  |

Contact your sales rep for any further information

**Toll Free: 1-800-561-3164**  
**boshart.com**

### BRASS BALL VALVES WITH DRAIN

Boshart's Brass Ball Valves with a drain are perfect for applications where water needs to be drained from the pipe after the valve. When installing one of these valves make sure the drain is not installed on the supply side of the valve.



Part No.                      Size                      Port Size                      Quantity  
L1      L2

**Standard Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle**  
**Comp Connection**

Temperature Range: Up to 300°F (149°C), Maximum Pressure: 200 PSI CWP

• NSF/ANSI Standard 61 & 372 Certified

• cUPC Standard IGC 157 Certified

Note: Can be used to make connections between Copper, Brass, Aluminum, Plastic, CPVC & Pex tubing. Not recommended for use with steel tubing, designed for use with tube manufactured to CTS-OD tubing.

|            |      |       |    |     |
|------------|------|-------|----|-----|
| 082CP-05NL | 1/2" | 0.59" | 10 | 100 |
| 082CP-07NL | 3/4" | 0.79" | 10 | 60  |
| 082CP-10NL | 1"   | 0.98" | 6  | 30  |



**Standard Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle**  
**PEX Connection**

Temperature Range: Up to 203°F (95°C), Maximum Pressure: 400 PSI CWP

• NSF/ANSI Standard 61 & 372 Certified

• cUPC Standard IGC 157 Certified

|              |      |       |    |     |
|--------------|------|-------|----|-----|
| 0821WDP-05NL | 1/2" | 0.39" | 10 | 120 |
| 0821WDP-07NL | 3/4" | 0.59" | 10 | 90  |
| 0821WDP-10NL | 1"   | 0.79" | 6  | 30  |



**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle**  
**FPT Connection**

Temperature Range: Up to 300°F (149°C), Maximum Pressure: 600 PSI WOG

• NSF/ANSI Standard 61 & 372 Certified

• cUPC Standard IGC 157 Certified

|            |      |       |    |     |
|------------|------|-------|----|-----|
| 082WD-05NL | 1/2" | 0.59" | 10 | 120 |
| 082WD-07NL | 3/4" | 0.75" | 10 | 60  |
| 082WD-10NL | 1"   | 1.02" | 6  | 30  |



**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle**  
**CxC Connection**

Temperature Range: Up to 300°F (149°C), Maximum Pressure: 600 PSI WOG

• NSF/ANSI Standard 61 & 372 Certified

• cUPC Standard IGC 157 Certified

|             |      |       |    |     |
|-------------|------|-------|----|-----|
| 082WDC-05NL | 1/2" | 0.59" | 10 | 120 |
| 082WDC-07NL | 3/4" | 0.75" | 10 | 60  |
| 082WDC-10NL | 1"   | 1.02" | 6  | 30  |



**Full Port Brass, Seat Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle**  
**Push Fit Connection**

Temperature Range: Up to 200°F (93°C), Maximum Pressure: 200 PSI

• NSF/ANSI Standard 61 & 372 Certified

• ASSE Standard 1061 Certified

|              |      |       |    |     |
|--------------|------|-------|----|-----|
| 082PF-05WDNL | 1/2" | 0.63" | 10 | 120 |
| 082PF-07WDNL | 3/4" | 0.88" | 10 | 60  |
| 082PF-10WDNL | 1"   | 1.13" | 6  | 30  |



Contact your sales rep for any further information

Toll Free: 1-800-561-3164

boshart.com

Rev. 5.6

### BRASS BALL VALVES - LOCKING HANDLE

Boshart's Brass Ball Valves with a locking handle can be locked in the open or closed position with a padlock. This provides more security and prevents the ball valve from being tampered with.



| Part No. | Size | Port Size | Quantity |    |
|----------|------|-----------|----------|----|
|          |      |           | L1       | L2 |

**Full Port Brass, Seat Material: PTFE, Stem Packing Material: Viton,  
Ball Material: Chrome Plated, Rubber Grip Handle  
FPT Connection**

Temperature Range: Up to 350°F (177°C), Maximum Pressure: 600 PSI CWP  
Maximum Pressure Rating of 450 PSI CWP for sizes 2-1/2" to 4"

- CSA listed to the following standards (1/4" - 2" only)
    - ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
    - ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
    - ASME B16.33 & CAN/CGA 3.16 : 125 PSIG (BRS125G / CAN 3.16)
  - UL listed to the following standards
    - UL 258 (VQGU): Trim and drain valves - 600 PSI (1/4" - 2")
    - UL 1477 (YQNZ): Compressed gas shutoff valves - 600 PSI (1/4" - 2") 450 PSI (2-1/2" - 4")
    - UL 842 (YRBX): Flammable liquid shutoff valves - 600 PSI (1/4" - 2") 250 PSI (2-1/2" - 4")
    - UL 842 (YRPV): Gas shutoff valves - 600 PSI (1/4" - 2") 250 PSI (2-1/2" - 4")
    - UL 842 (MHKZ): Manual valves - 600 PSI (1/4" - 2") 250 PSI (2-1/2" - 4")
    - UL 125 (YSDT): LP-Gas shutoff valves - 600 PSI (1/4" - 2") 450 PSI (2-1/2" - 4")
  - Manufactured according to MSS SP-110
- Note: Padlock not included.

|           |        |       |    |     |
|-----------|--------|-------|----|-----|
| 0826LH-02 | 1/4"   | 0.31" | 12 | 192 |
| 0826LH-03 | 3/8"   | 0.39" | 12 | 192 |
| 0826LH-05 | 1/2"   | 0.59" | 8  | 128 |
| 0826LH-07 | 3/4"   | 0.79" | 12 | 96  |
| 0826LH-10 | 1"     | 0.98" | 8  | 64  |
| 0826LH-12 | 1-1/4" | 1.26" | 8  | 32  |
| 0826LH-15 | 1-1/2" | 1.57" | 6  | 24  |
| 0826LH-20 | 2"     | 1.97" | 4  | 16  |
| 0826LH-25 | 2-1/2" | 2.56" | 2  |     |
| 0826LH-30 | 3"     | 3.15" |    |     |
| 0826LH-40 | 4"     | 3.94" |    |     |

Contact your sales rep for any further information

**Toll Free: 1-800-561-3164**  
**boshart.com**

### STAINLESS STEEL BALL VALVES

Boshart's Stainless Steel Ball Valves come in 2 different materials to suit a variety of applications. 304 CF8 Stainless Steel can be used in conventional situations, where 316 CF8M Stainless Steel can be used in more demanding environments. Please note that SSPEXBV-05, SSPEXBV-07 and SSPEXBV-10 are only available with 304 Stainless Steel.



**Part No.** **Size** **Port Size** **Quantity**  
L1 L2

**304 Stainless Steel, Seat Material: PTFE, Stem Packing Material: Nitrile Rubber, Ball Material: Stainless Steel, Stainless Steel**  
**Crimp PEX Connection**  
Temperature Range: -40°F to 200°F (-40°C to 93°C), Maximum Pressure: 600 PSI CWP  
• NSF/ANSI Standard 61 & 372 Certified  
• cUPC Certified  
• Crimp PEX end conforms to ASTM F1807

|            |      |       |    |     |
|------------|------|-------|----|-----|
| SSPEXBV-05 | 1/2" | 0.35" | 20 | 120 |
| SSPEXBV-07 | 3/4" | 0.47" | 15 | 90  |
| SSPEXBV-10 | 1"   | 0.67" | 5  | 30  |



**Full Port 316 Stainless Steel, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Stainless Steel, Stainless Steel Locking Handle**  
**FPT Connection**  
Temperature Range: Up to 450°F (232°C), Maximum Pressure: 1000 PSI  
• NSF/ANSI Standard 372 Certified

|             |        |       |    |    |
|-------------|--------|-------|----|----|
| SSBV1000-02 | 1/4"   | 0.45" | 15 | 90 |
| SSBV1000-03 | 3/8"   | 0.47" | 15 | 90 |
| SSBV1000-05 | 1/2"   | 0.59" | 9  | 54 |
| SSBV1000-07 | 3/4"   | 0.78" | 6  | 36 |
| SSBV1000-10 | 1"     | 0.98" | 4  | 24 |
| SSBV1000-12 | 1-1/4" | 1.26" | 2  | 12 |
| SSBV1000-15 | 1-1/2" | 1.49" | 6  | 12 |
| SSBV1000-20 | 2"     | 1.96" | 3  | 6  |
| SSBV1000-25 | 2-1/2" | 2.55" | 4  |    |
| SSBV1000-30 | 3"     | 3.15" |    |    |



**Standard Port 316 Stainless Steel, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Stainless Steel, Stainless Steel Locking Handle**  
**FPT Connection**  
Temperature Range: Up to 450°F (232°C), Maximum Pressure: 2000 PSI  
• NSF/ANSI Standard 372 Certified

|             |        |       |    |    |
|-------------|--------|-------|----|----|
| SSBV2000-02 | 1/4"   | 0.37" | 12 | 72 |
| SSBV2000-03 | 3/8"   | 0.37" | 12 | 72 |
| SSBV2000-05 | 1/2"   | 0.50" | 36 | 72 |
| SSBV2000-07 | 3/4"   | 0.69" | 6  | 36 |
| SSBV2000-10 | 1"     | 0.88" | 5  | 30 |
| SSBV2000-12 | 1-1/4" | 1.00" | 2  | 12 |
| SSBV2000-15 | 1-1/2" | 1.25" | 6  | 12 |
| SSBV2000-20 | 2"     | 1.50" | 4  | 8  |



**Full Port 304 Stainless Steel, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Stainless Steel, Stainless Steel**  
**FPT Connection**  
Temperature Range: 14°F to 248°F (-10°C to 120°C), Maximum Pressure: 1000 PSI  
• NSF/ANSI Standard 372 Certified

|            |        |       |    |     |
|------------|--------|-------|----|-----|
| SSBV304-02 | 1/4"   | 0.43" | 20 | 120 |
| SSBV304-03 | 3/8"   | 0.49" | 20 | 120 |
| SSBV304-05 | 1/2"   | 0.59" | 16 | 96  |
| SSBV304-07 | 3/4"   | 0.79" | 10 | 60  |
| SSBV304-10 | 1"     | 0.98" | 10 | 40  |
| SSBV304-12 | 1-1/4" | 1.26" | 6  | 24  |
| SSBV304-15 | 1-1/2" | 1.50" | 4  | 16  |
| SSBV304-20 | 2"     | 1.97" | 2  | 12  |
| SSBV304-25 | 2-1/2" | 2.56" | 2  | 4   |
| SSBV304-30 | 3"     | 2.99" | 4  |     |
| SSBV304-40 | 4"     | 3.70" | 2  |     |

Contact your sales rep for any further information

**Toll Free: 1-800-561-3164**  
**boshart.com**

### COLD EXPANSION PEX STAINLESS STEEL BALL VALVES

Boshart's Stainless Steel Cold Expansion PEX Ball Valves are premium quality and durable. Featuring high corrosion resistance, and are ideal for areas with high acidity and anywhere water quality is an issue.



| Part No. | Size | Port Size | Quantity |    | List Price - A |
|----------|------|-----------|----------|----|----------------|
|          |      |           | L1       | L2 |                |

List Price Effective: June 26, 2023

**Full Port 304 Stainless Steel, Seat Material: PTFE, Stem Packing Material: Nitrile Rubber, Ball Material: Stainless Steel, Stainless Steel Blue Plastic Handle**  
**CE PEX Connection**  
 Temperature Range: -40°F to 200°F (-40°C to 93°C), Maximum Pressure: 600 PSI CWP

|            |      |       |    |     |          |
|------------|------|-------|----|-----|----------|
| SSCEPBV-05 | 1/2" | 0.38" | 20 | 120 | \$ 19.74 |
| SSCEPBV-07 | 3/4" | 0.60" | 10 | 60  | \$ 23.48 |
| SSCEPBV-10 | 1"   | 0.80" | 5  | 30  | \$ 29.80 |

### PVC BALL VALVES

PVC Ball Valves are durable and excellent for a variety of applications, including water supply, swimming pools, and irrigation applications. 0922CTS series are for hot water applications.



| Part No. | Size | Port Size | Quantity |    |
|----------|------|-----------|----------|----|
|          |      |           | L1       | L2 |

**PVC, Seat Material: EPDM, Stem Packing Material: EPDM, Ball Material: PVC, ABS Tee Handle**  
**FPT Connection**

Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)

• NSF/ANSI Standard 372 Certified

Suitable for both Schedule 40 & 80 PVC Pipe.

|         |        |       |     |
|---------|--------|-------|-----|
| 0929-05 | 1/2"   | 0.59" | 200 |
| 0929-07 | 3/4"   | 0.79" | 160 |
| 0929-10 | 1"     | 0.98" | 96  |
| 0929-12 | 1-1/4" | 1.26" | 72  |
| 0929-15 | 1-1/2" | 1.42" | 45  |
| 0929-20 | 2"     | 1.81" | 36  |
| 0929-25 | 2-1/2" | 2.48" | 12  |
| 0929-30 | 3"     | 3.15" | 8   |
| 0929-40 | 4"     | 3.81" | 6   |



**PVC, Seat Material: EPDM, Stem Packing Material: EPDM, Ball Material: PVC, ABS Tee Handle**  
**Slip Connection**

Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)

• NSF/ANSI Standard 372 Certified

Suitable for both Schedule 40 & 80 PVC Pipe.

|          |        |       |     |
|----------|--------|-------|-----|
| 0929S-05 | 1/2"   | 0.59" | 200 |
| 0929S-07 | 3/4"   | 0.79" | 160 |
| 0929S-10 | 1"     | 0.98" | 96  |
| 0929S-12 | 1-1/4" | 1.26" | 72  |
| 0929S-15 | 1-1/2" | 1.42" | 45  |
| 0929S-20 | 2"     | 1.81" | 36  |
| 0929S-25 | 2-1/2" | 2.48" | 12  |
| 0929S-30 | 3"     | 3.15" | 8   |
| 0929S-40 | 4"     | 3.81" | 6   |



Contact your sales rep for any further information

Toll Free: 1-800-561-3164  
 boshart.com

### PVC BALL VALVES

| Part No. | Size | Port Size | Quantity |    |
|----------|------|-----------|----------|----|
|          |      |           | L1       | L2 |



**True Union UPVC, Seat Material: PTFE, Stem Packing Material: EPDM, Ball Material: UPVC, ABS Tee Handle**  
**FPT or Slip Connection**

Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)  
 Note: Double union / double block design permits in-line maintenance without disconnecting pipe. Ends are blocked with bayonet style lock to prevent ball from being blown out. Handle is equipped with removable spanner device.  
 Suitable for both Schedule 40 & 80 PVC Pipe.



|         |        |       |    |
|---------|--------|-------|----|
| 0924-05 | 1/2"   | 0.51" | 48 |
| 0924-07 | 3/4"   | 0.71" | 36 |
| 0924-10 | 1"     | 0.91" | 24 |
| 0924-12 | 1-1/4" | 1.18" | 24 |
| 0924-15 | 1-1/2" | 1.50" | 24 |
| 0924-20 | 2"     | 1.89" | 12 |



**CPVC, Seat Material: PTFE, Stem Packing Material: EPDM, Ball Material: CPVC, ABS Tee Handle**  
**CTS Connection**

Temperature Range: Short: 212°F (100°C), Continuous: 32°F to 194°F (0°C to 90°C),  
 Maximum Pressure: Working: 150 PSI @ 73°F (23°C), Test: 225 PSI  
 • NSF/ANSI Standard 61 & 372 Certified  
 Suitable for cold & hot water.



|            |        |       |     |
|------------|--------|-------|-----|
| 0922CTS-05 | 1/2"   | 0.49" | 360 |
| 0922CTS-07 | 3/4"   | 0.72" | 224 |
| 0922CTS-10 | 1"     | 0.93" | 120 |
| 0922CTS-12 | 1-1/4" | 0.98" | 96  |
| 0922CTS-15 | 1-1/2" | 1.18" | 72  |
| 0922CTS-20 | 2"     | 1.42" | 36  |

### PREMIUM PVC BALL VALVES

PVC Ball Valves are durable and excellent for a variety of applications, including water supply, swimming pools, and irrigation applications.

| Part No. | Size | Port Size | Quantity |    |
|----------|------|-----------|----------|----|
|          |      |           | L1       | L2 |



**Molded in Place PVC, Seat Material: EPDM, Stem Packing Material: EPDM, Ball Material: PVC, ABS Tee Handle**  
**FPT Connection**

Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)  
 • NSF/ANSI Standard 61 & 372 Certified (1/2" to 2" only)

Suitable for both Schedule 40 & 80 PVC pipe.

|         |        |       |     |
|---------|--------|-------|-----|
| 0921-05 | 1/2"   | 0.55" | 100 |
| 0921-07 | 3/4"   | 0.79" | 100 |
| 0921-10 | 1"     | 0.98" | 100 |
| 0921-12 | 1-1/4" | 1.18" | 100 |
| 0921-15 | 1-1/2" | 1.42" | 48  |
| 0921-20 | 2"     | 1.83" | 24  |
| 0921-25 | 2-1/2" | 2.36" | 12  |
| 0921-30 | 3"     | 3.03" | 12  |
| 0921-40 | 4"     | 3.93" | 6   |

Contact your sales rep for any further information

Toll Free: 1-800-561-3164

boshart.com

Rev. 5.4

### PREMIUM PVC BALL VALVES

| Part No. | Size | Port Size | Quantity |    |
|----------|------|-----------|----------|----|
|          |      |           | L1       | L2 |



**Molded in Place PVC, Seat Material: EPDM, Stem Packing Material: EPDM, Ball Material: PVC, ABS Tee Handle**

**Slip Connection**

Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)

• NSF/ANSI Standard 61 & 372 Certified (1/2" to 2" only)

Suitable for both Schedule 40 & 80 PVC pipe.

|          |        |       |     |
|----------|--------|-------|-----|
| 0921S-05 | 1/2"   | 0.55" | 100 |
| 0921S-07 | 3/4"   | 0.79" | 100 |
| 0921S-10 | 1"     | 0.98" | 100 |
| 0921S-12 | 1-1/4" | 1.18" | 100 |
| 0921S-15 | 1-1/2" | 1.42" | 48  |
| 0921S-20 | 2"     | 1.83" | 24  |
| 0921S-25 | 2-1/2" | 2.36" | 12  |
| 0921S-30 | 3"     | 3.03" | 12  |
| 0921S-40 | 4"     | 3.93" | 6   |



**Molded in Place PVC, Seat Material: PTFE, Stem Packing Material: Viton, Ball Material: PVC, ABS Tee Handle**

**FPT Connection**

Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)

Suitable for both Schedule 40 & 80 PVC pipe.

|         |        |       |     |
|---------|--------|-------|-----|
| 0923-05 | 1/2"   | 0.55" | 100 |
| 0923-07 | 3/4"   | 0.79" | 100 |
| 0923-10 | 1"     | 0.98" | 100 |
| 0923-12 | 1-1/4" | 1.18" | 100 |
| 0923-15 | 1-1/2" | 1.42" | 48  |
| 0923-20 | 2"     | 1.83" | 24  |



**Molded in Place PVC, Seat Material: PTFE, Stem Packing Material: Viton, Ball Material: PVC, ABS Tee Handle**

**Slip Connection**

Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)

Suitable for both Schedule 40 & 80 PVC pipe.

|          |        |       |     |
|----------|--------|-------|-----|
| 0923S-05 | 1/2"   | 0.55" | 100 |
| 0923S-07 | 3/4"   | 0.79" | 100 |
| 0923S-10 | 1"     | 0.98" | 100 |
| 0923S-12 | 1-1/4" | 1.18" | 100 |
| 0923S-15 | 1-1/2" | 1.42" | 48  |
| 0923S-20 | 2"     | 1.83" | 24  |



**Single Union UPVC, Seat Material: EPDM, Stem Packing Material: EPDM, Ball Material: UPVC, ABS Tee Handle**

**FPT Connection**

Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)

• Threads conform to ANSI/ASME B1.20.1

Suitable for both Schedule 40 & 80 PVC pipe.

|         |        |       |    |
|---------|--------|-------|----|
| 0933-15 | 1-1/2" | 1.52" | 48 |
| 0933-20 | 2"     | 1.89" | 24 |



**Single Union UPVC, Seat Material: EPDM, Stem Packing Material: EPDM, Ball Material: UPVC, ABS Tee Handle**

**Slip Connection**

Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)

• Slip connections conform to ASTM D2466

Suitable for both Schedule 40 & 80 PVC pipe.

|          |        |       |    |
|----------|--------|-------|----|
| 0933S-15 | 1-1/2" | 1.52" | 48 |
| 0933S-20 | 2"     | 1.89" | 24 |

Contact your sales rep for any further information

Toll Free: 1-800-561-3164

boshart.com

### PREMIUM PVC BALL VALVES



| Part No. | Size | Port Size | Quantity |    |
|----------|------|-----------|----------|----|
|          |      |           | L1       | L2 |

**True Union UPVC, Seat Material: PTFE, Stem Packing Material: EPDM, Ball Material: UPVC, ABS Tee Handle  
FPT or Slip Connection**

Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)

• NSF/ANSI 61 & 372 Certified

Note: Double union / double block design permits in-line maintenance without disconnecting pipe. Ends are blocked with bayonet style lock to prevent ball from being blown out. Handle is equipped with removable spanner device.

Suitable for both Schedule 40 & 80 PVC pipe. Note: Double union / double block design permits in-line maintenance without disconnecting pipe. Ends are blocked with bayonet style lock to prevent ball from being blown out. Handle is equipped with removable spanner device.

|           |        |       |    |
|-----------|--------|-------|----|
| 0925-05NL | 1/2"   | 0.51" | 48 |
| 0925-07NL | 3/4"   | 0.71" | 36 |
| 0925-10NL | 1"     | 0.91" | 24 |
| 0925-12NL | 1-1/4" | 1.18" | 24 |
| 0925-15NL | 1-1/2" | 1.50" | 24 |
| 0925-20NL | 2"     | 1.89" | 12 |
| 0925-25NL | 2-1/2" | 2.36" | 6  |
| 0925-30NL | 3"     | 2.72" | 6  |
| 0925-40NL | 4"     | 3.94" |    |



**True Union UPVC, Seat Material: PTFE, Stem Packing Material: Viton, Ball Material: UPVC, ABS Tee Handle  
FPT or Slip Connection**

Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)

Note: Double union / double block design permits in-line maintenance without disconnecting pipe. Ends are blocked with bayonet style lock to prevent ball from being blown out. Handle is equipped with removable spanner device.

Suitable for both Schedule 40 & 80 PVC pipe. Note: Double union / double block design permits in-line maintenance without disconnecting pipe. Ends are blocked with bayonet style lock to prevent ball from being blown out. Handle is equipped with removable spanner device.

|         |        |       |    |
|---------|--------|-------|----|
| 0926-05 | 1/2"   | 0.51" | 48 |
| 0926-07 | 3/4"   | 0.71" | 36 |
| 0926-10 | 1"     | 0.91" | 24 |
| 0926-12 | 1-1/4" | 1.18" | 24 |
| 0926-15 | 1-1/2" | 1.50" | 24 |
| 0926-20 | 2"     | 1.89" | 12 |
| 0926-25 | 2-1/2" | 2.36" | 6  |
| 0926-30 | 3"     | 2.72" | 6  |
| 0926-40 | 4"     | 3.94" | 1  |

Contact your sales rep for any further information

Toll Free: 1-800-561-3164

boshart.com

Rev. 5.6

### GAS BALL VALVES

Boshart's Gas Ball Valves have a two piece forged brass body and a blow out proof stem. Available in combinations of FPT, Flare and MPT threads. Options for a 1/8" tapping for a manometer which allows line pressure to be tested at the valve are available. FPT connections are available with a yellow or red handle.

| Part No. | Size | Port Size | Quantity |    |
|----------|------|-----------|----------|----|
|          |      |           | L1       | L2 |



#### Two Piece Brass, Seat Material: PTFE, Yellow Tee Handle FPT Connection

Temperature Range: -4°F to 149°F (-20°C to 65°C), Maximum Pressure: 250 PSI

- CSA listed to the following standards
  - ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
  - ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
- UL listed to the following standards
  - UL 842 (YRPV): Gas shutoff valves - 250 PSI
  - UL 842 (MHKZ): Manual valves - 250 PSI
  - UL 125 (YSDT): LP-Gas shutoff valves - 250 PSI

|         |      |       |    |     |
|---------|------|-------|----|-----|
| 0832-03 | 3/8" | 0.39" | 10 | 100 |
| 0832-05 | 1/2" | 0.39" | 10 | 100 |
| 0832-07 | 3/4" | 0.59" | 10 | 100 |
| 0832-10 | 1"   | 0.75" | 6  | 60  |



#### Two Piece Brass, Seat Material: PTFE, Red Tee Handle FPT Connection

Temperature Range: -4°F to 149°F (-20°C to 65°C), Maximum Pressure: 250 PSI

- CSA listed to the following standards
  - ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
  - ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
- UL listed to the following standards
  - UL 842 (YRPV): Gas shutoff valves - 250 PSI
  - UL 842 (MHKZ): Manual valves - 250 PSI
  - UL 125 (YSDT): LP-Gas shutoff valves - 250 PSI

|          |      |       |    |     |
|----------|------|-------|----|-----|
| 0832R-03 | 3/8" | 0.39" | 10 | 100 |
| 0832R-05 | 1/2" | 0.39" | 10 | 100 |
| 0832R-07 | 3/4" | 0.59" | 10 | 100 |
| 0832R-10 | 1"   | 0.75" | 6  | 60  |



#### Two Piece Brass, Seat Material: PTFE, Yellow Tee Handle FPT Connection

Temperature Range: -4°F to 149°F (-20°C to 65°C), Maximum Pressure: 250 PSI

- CSA listed to the following standards
  - ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
  - ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
- UL listed to the following standards
  - UL 842 (YRPV): Gas shutoff valves - 250 PSI
  - UL 842 (MHKZ): Manual valves - 250 PSI
  - UL 125 (YSDT): LP-Gas shutoff valves - 250 PSI

|           |      |       |    |     |
|-----------|------|-------|----|-----|
| 0832TP-05 | 1/2" | 0.39" | 10 | 100 |
| 0832TP-07 | 3/4" | 0.59" | 10 | 100 |



#### Two Piece Brass, Seat Material: PTFE, Yellow Tee Handle FPT x Flare Connection

Temperature Range: -4°F to 149°F (-20°C to 65°C), Maximum Pressure: 250 PSI

- CSA listed to the following standards
  - ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
  - ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
- UL listed to the following standards
  - UL 842 (YRPV): Gas shutoff valves - 250 PSI
  - UL 842 (MHKZ): Manual valves - 250 PSI
  - UL 125 (YSDT): LP-Gas shutoff valves - 250 PSI

|           |             |       |    |     |
|-----------|-------------|-------|----|-----|
| 0833-0503 | 1/2" x 3/8" | 0.39" | 10 | 100 |
| 0833-0505 | 1/2"        | 0.39" | 10 | 100 |

Contact your sales rep for any further information

Toll Free: 1-800-561-3164

boshart.com

### GAS BALL VALVES



| Part No. | Size | Port Size | Quantity |    |
|----------|------|-----------|----------|----|
|          |      |           | L1       | L2 |

**Two Piece Brass, Seat Material: PTFE, Yellow Tee Handle**  
**MPT x Flare Connection**

Temperature Range: -4°F to 149°F (-20°C to 65°C), Maximum Pressure: 250 PSI

- CSA listed to the following standards
  - ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
  - ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
- UL listed to the following standards
  - UL 842 (YRPV): Gas shutoff valves - 250 PSI
  - UL 842 (MHKZ): Manual valves - 250 PSI
  - UL 125 (YSDT): LP-Gas shutoff valves - 250 PSI

|           |             |       |    |     |
|-----------|-------------|-------|----|-----|
| 0834-0503 | 1/2" x 3/8" | 0.39" | 10 | 100 |
| 0834-0505 | 1/2"        | 0.39" | 10 | 100 |



**Two Piece Brass, Seat Material: PTFE, Yellow Tee Handle**  
**Flare Connection**

Temperature Range: -4°F to 149°F (-20°C to 65°C), Maximum Pressure: 250 PSI

- CSA listed to the following standards
  - ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
  - ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
- UL listed to the following standards
  - UL 842 (YRPV): Gas shutoff valves - 250 PSI
  - UL 842 (MHKZ): Manual valves - 250 PSI
  - UL 125 (YSDT): LP-Gas shutoff valves - 250 PSI

|         |      |       |    |     |
|---------|------|-------|----|-----|
| 0835-03 | 3/8" | 0.27" | 10 | 100 |
| 0835-05 | 1/2" | 0.38" | 10 | 100 |



**Two Piece Brass, Yellow Tee Handle**  
**Flare Connection**

Temperature Range: -4°F to 149°F (-20°C to 65°C), Maximum Pressure: 250 PSI

- CSA listed to the following standards
  - ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
  - ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
- UL listed to the following standards
  - UL 842 (YRPV): Gas shutoff valves - 250 PSI
  - UL 842 (MHKZ): Manual valves - 250 PSI
  - UL 125 (YSDT): LP-Gas shutoff valves - 250 PSI

|           |      |       |    |     |
|-----------|------|-------|----|-----|
| 0835TP-03 | 3/8" | 0.27" | 10 | 100 |
| 0835TP-05 | 1/2" | 0.38" | 10 | 100 |

### BENT NOSE GARDEN VALVES

Boshart's Bent Nose Garden Valves are designed with an angled outlet. This allows a garden hose to be attached easily without the risk of a kink being formed.

| Part No. | Size | Quantity |    |
|----------|------|----------|----|
|          |      | L1       | L2 |



**Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Graphite,**  
**Green Rubber Coated Hand Wheel Handle**  
**FPT x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

- NSF/ANSI Standard 372 Certified
- CSA Standard B125.1 Certified

|           |           |    |    |
|-----------|-----------|----|----|
| 0872-07NL | 3/4"      | 12 | 72 |
| 0872-10NL | 1" x 3/4" | 12 | 72 |



Contact your sales rep for any further information

**Toll Free: 1-800-561-3164**  
**boshart.com**

Rev. 5.6

### HOSE BIBBS / SAMPLING FAUCETS

Boshart's Hose Bibbs are available in brass, stainless steel or plastic. They come in multi-turn or 1/4 turn.

| Part No. | Size | Quantity |    |
|----------|------|----------|----|
|          |      | L1       | L2 |



**Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Tee Handle**

**MPT x GHT Connection**

Temperature Range: Up to 248°F (120°C), Maximum Pressure: 125 PSI

- NSF/ANSI Standard 61 & 372 Certified
- 0871-05NL is 1/2" MPT or Solder

|           |             |    |     |
|-----------|-------------|----|-----|
| 0871-05NL | 1/2" x 3/4" | 10 | 100 |
| 0871-07NL | 3/4"        | 10 | 100 |



**Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Tee Handle**

**MPT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

- NSF/ANSI Standard 61 & 372 Certified

|           |      |    |     |
|-----------|------|----|-----|
| 0874-05NL | 1/2" | 10 | 100 |
| 0874-07NL | 3/4" | 10 | 100 |



**Angled Brass, Seat Material: PTFE, Stem Packing Material: Nitrile Rubber, Tee Handle**

**MPT x GHT Connection**

Temperature Range: Up to 248°F (120°C), Maximum Pressure: 200 PSI

- NSF/ANSI Standard 61 & 372 Certified

|           |             |    |     |
|-----------|-------------|----|-----|
| 0852-05NL | 1/2" x 3/4" | 10 | 100 |
| 0852-07NL | 3/4"        | 10 | 100 |



**Angled Stainless Steel, Seat Material: PTFE, Stem Packing Material: PTFE, Tee Handle**

**MPT x GHT Connection**

Temperature Range: Up to 248°F (120°C), Maximum Pressure: 200 PSI

- NSF/ANSI Standard 372 Certified

|           |             |    |     |
|-----------|-------------|----|-----|
| SSHB52-05 | 1/2" x 3/4" | 10 | 100 |
| SSHB52-07 | 3/4"        | 10 | 100 |



**Angled Stainless Steel, Seat Material: PTFE, Stem Packing Material: PTFE, Tee Handle**

**MPT Connection**

Temperature Range: Up to 248°F (120°C), Maximum Pressure: 200 PSI

- NSF/ANSI Standard 372 Certified

|           |      |    |     |
|-----------|------|----|-----|
| SSSF52-05 | 1/2" | 10 | 100 |
| SSSF52-07 | 3/4" | 10 | 100 |



Contact your sales rep for any further information

Toll Free: 1-800-561-3164

boshart.com

### NO-KINK HOSE BIBBS

Boshart's No-Kink Hose Bibbs are designed with an angled outlet. This allows a garden hose to be attached easily without the risk of a kink being formed.



**Part No.**                      **Size**                                      **Quantity**  
L1      L2

**Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Brass Plated Tee Handle**

**MPT x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- 0875-05NL has dual 1/2" MPT or 1/2" Copper inlet

|           |             |    |     |
|-----------|-------------|----|-----|
| 0875-05NL | 1/2" x 3/4" | 10 | 100 |
| 0875-07NL | 3/4"        | 10 | 100 |



**Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Brass Plated Tee Handle**

**FPT x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified

|            |             |    |     |
|------------|-------------|----|-----|
| 0875F-05NL | 1/2" x 3/4" | 10 | 100 |
| 0875F-07NL | 3/4"        | 10 | 100 |



**Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: PTFE, Green Epoxy Coated Tee Handle**

**MPT x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- 0875H-05NL has dual 1/2" MPT or 1/2" Copper inlet

|            |             |    |    |
|------------|-------------|----|----|
| 0875H-05NL | 1/2" x 3/4" | 12 | 72 |
| 0875H-07NL | 3/4"        | 12 | 72 |



**Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: PTFE, Green Epoxy Coated Tee Handle**

**FPT x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified

|             |             |    |    |
|-------------|-------------|----|----|
| 0875HF-05NL | 1/2" x 3/4" | 12 | 72 |
| 0875HF-07NL | 3/4"        | 12 | 72 |



### BRASS SILLCOCKS

Boshart's Brass Sillcocks are ideal for cold water applications.

**Part No.**                      **Size**                                      **Quantity**  
L1      L2



**Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Black Cast Hand Wheel Handle**

**FPT x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified

|           |             |    |     |
|-----------|-------------|----|-----|
| 0873-05NL | 1/2" x 3/4" | 12 | 144 |
| 0873-07NL | 3/4"        | 12 | 144 |



**Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Black Cast Hand Wheel Handle**

**CxC x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified

|            |             |    |     |
|------------|-------------|----|-----|
| 0873C-05NL | 1/2" x 3/4" | 12 | 144 |
|------------|-------------|----|-----|



Contact your sales rep for any further information

**Toll Free: 1-800-561-3164**

**boshart.com**

### SEDIMENT FAUCETS / BOILER DRAINS

Boshart's Sediment Faucets can be used to flush sediment build-up from pressure tanks. There are two designs, straight and angled, for when connecting a hose is required.

Part No.                      Size                      Quantity  
L1    L2



**Straight Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Black Cast Hand Wheel Handle**  
**MPT x GHT Connection**

Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI

- NSF/ANSI 61 & 372 Certified
- CSA Standard B125.1 Certified
- 0853-05NL has dual 1/2" MPT or 1/2" Copper inlet

|           |             |    |     |
|-----------|-------------|----|-----|
| 0853-05NL | 1/2" x 3/4" | 10 | 100 |
| 0853-07NL | 3/4"        | 10 | 100 |



**Straight Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Black Cast Hand Wheel Handle**  
**FPT x GHT Connection**

Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI

- NSF/ANSI 61 & 372 Certified
- CSA Standard B125.1 Certified

|            |             |    |     |
|------------|-------------|----|-----|
| 0853F-05NL | 1/2" x 3/4" | 10 | 100 |
| 0853F-07NL | 3/4"        | 10 | 100 |



**Straight Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Black Cast Hand Wheel Handle**  
**MPT x GHT Connection**

Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI

- NSF / ANSI 61 & 372 Certified
- CSA B125.1 Certified
- 0851-05 has dual 1/2" MPT or 1/2" Copper inlet

|         |             |    |     |
|---------|-------------|----|-----|
| 0851-05 | 1/2" x 3/4" | 10 | 100 |
| 0851-07 | 3/4"        | 10 | 100 |



**Straight Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Black Cast Hand Wheel Handle**  
**Crimp PEX or MPT x GHT Connection**

Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI

- NSF/ANSI 61 & 372 Certified
- CSA Standard B125.1 Certified

|            |             |    |     |
|------------|-------------|----|-----|
| 0851P-05NL | 1/2" x 3/4" | 10 | 100 |
|------------|-------------|----|-----|



**Straight Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Blue Triangular Handle**  
**MPT x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

- NSF/ANSI 372 Certified
- CSA Standard B125.1 Certified

|             |             |    |     |
|-------------|-------------|----|-----|
| 0845SF-05NL | 1/2" x 3/4" | 10 | 100 |
| 0845SF-07NL | 3/4"        | 10 | 100 |



**Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Blue Triangular Handle**  
**MPT x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

- NSF/ANSI 372 Certified
- CSA Standard B125.1 Certified

|              |             |    |     |
|--------------|-------------|----|-----|
| 0845SFA-05NL | 1/2" x 3/4" | 12 | 144 |
| 0845SFA-07NL | 3/4"        | 12 | 144 |



**Straight Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Zinc Plated Handle**  
**MPT x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

- NSF/ANSI 372 Certified
- CSA Standard B125.1 Certified

|             |             |    |     |
|-------------|-------------|----|-----|
| 0846SF-05NL | 1/2" x 3/4" | 10 | 100 |
| 0846SF-07NL | 3/4"        | 10 | 100 |



Contact your sales rep for any further information

Toll Free: 1-800-561-3164  
boshart.com

### STOP / STOP & WASTE VALVES

Boshart's Stop / Stop & Waste Valves are excellent for anywhere a compact, economical shut off is required. These come in two options, with a drain hole and cap and without the drain.



| Part No.                                                                                          | Size | Quantity |     |
|---------------------------------------------------------------------------------------------------|------|----------|-----|
|                                                                                                   |      | L1       | L2  |
| <b>Stop Brass, Seat Material: Nitrile Rubber, Black Cast Hand Wheel Handle<br/>FPT Connection</b> |      |          |     |
| Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI                                  |      |          |     |
| • NSF/ANSI 61 & 372 Certified                                                                     |      |          |     |
| • CSA Standard B125.1 Certified                                                                   |      |          |     |
| 0843-05NL                                                                                         | 1/2" | 10       | 100 |
| 0843-07NL                                                                                         | 3/4" | 10       | 100 |



|                                                                                                   |      |    |     |
|---------------------------------------------------------------------------------------------------|------|----|-----|
| <b>Stop Brass, Seat Material: Nitrile Rubber, Black Cast Hand Wheel Handle<br/>CxC Connection</b> |      |    |     |
| Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI                                  |      |    |     |
| • NSF/ANSI 61 & 372 Certified                                                                     |      |    |     |
| • CSA Standard B125.1 Certified                                                                   |      |    |     |
| 0843C-05NL                                                                                        | 1/2" | 10 | 100 |
| 0843C-07NL                                                                                        | 3/4" | 10 | 100 |



|                                                                                                               |      |    |     |
|---------------------------------------------------------------------------------------------------------------|------|----|-----|
| <b>Stop &amp; Waste Brass, Seat Material: Nitrile Rubber, Black Cast Hand Wheel Handle<br/>FPT Connection</b> |      |    |     |
| Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI                                              |      |    |     |
| • NSF/ANSI 61 & 372 Certified                                                                                 |      |    |     |
| • CSA Standard B125.1 Certified                                                                               |      |    |     |
| 0844-05NL                                                                                                     | 1/2" | 10 | 100 |
| 0844-07NL                                                                                                     | 3/4" | 10 | 100 |



|                                                                                                               |      |    |     |
|---------------------------------------------------------------------------------------------------------------|------|----|-----|
| <b>Stop &amp; Waste Brass, Seat Material: Nitrile Rubber, Black Cast Hand Wheel Handle<br/>CxC Connection</b> |      |    |     |
| Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI                                              |      |    |     |
| • NSF/ANSI 61 & 372 Certified                                                                                 |      |    |     |
| • CSA Standard B125.1 Certified                                                                               |      |    |     |
| 0844C-05NL                                                                                                    | 1/2" | 10 | 100 |
| 0844C-07NL                                                                                                    | 3/4" | 10 | 100 |



|                                                                                                                                                                                                         |      |    |     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|----|-----|
| <b>Stop &amp; Waste Brass, Seat Material: Nitrile Rubber, Black Cast Hand Wheel Handle<br/>Comp Connection</b>                                                                                          |      |    |     |
| Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI                                                                                                                                        |      |    |     |
| • NSF/ANSI 61 & 372 Certified                                                                                                                                                                           |      |    |     |
| • CSA Standard B125.1 Certified                                                                                                                                                                         |      |    |     |
| Note: Can be used to make connections between Copper, Brass, Aluminum, Plastic, CPVC & Pex tubing. Not recommended for use with steel tubing, designed for use with tube manufactured to CTS-OD tubing. |      |    |     |
| 0844CPR-05NL                                                                                                                                                                                            | 1/2" | 10 | 100 |
| 0844CPR-07NL                                                                                                                                                                                            | 3/4" | 10 | 100 |

### CHROME PLATED NON-FREEZE LAWN FAUCETS

Boshart's Non-Freeze Lawn Faucets get installed through a wall and allow the water to drain back out of the valve so it won't freeze in the winter. This prevents winterizing and allows outdoor access to water year round.



| Part No.                                                                                                                               | Size        | Length | Quantity |    |
|----------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|----------|----|
|                                                                                                                                        |             |        | L1       | L2 |
| <b>Without Self Draining Vacuum Breaker Seat Material: Nitrile Rubber, Black Cast Hand Wheel Handle MPT or Copper x GHT Connection</b> |             |        |          |    |
| Temperature Range: Up to 120°F (49°C), Maximum Pressure: 125 PSI                                                                       |             |        |          |    |
| • NSF/ANSI Standard 61 & 372 Certified                                                                                                 |             |        |          |    |
| • CSA Standard B125.1 Certified                                                                                                        |             |        |          |    |
| 0861-080NL                                                                                                                             | 1/2" x 3/4" | 8"     | 2        | 40 |
| 0861-100NL                                                                                                                             | 1/2" x 3/4" | 10"    | 2        | 40 |
| 0861-120NL                                                                                                                             | 1/2" x 3/4" | 12"    | 2        | 40 |
| 0861-140NL                                                                                                                             | 1/2" x 3/4" | 14"    | 2        | 40 |

Contact your sales rep for any further information

Toll Free: 1-800-561-3164  
boshart.com

### CHROME PLATED NON-FREEZE LAWN FAUCETS

| Part No. | Size | Length | Quantity |    |
|----------|------|--------|----------|----|
|          |      |        | L1       | L2 |



#### With Self Draining Vacuum Breaker Seat Material: Viton, Black Cast Hand Wheel Handle MPT or Copper x GHT Connection

Temperature Range: Up to 140°F (60°C), Maximum Pressure: 125 PSI

- 1/4 turn
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- ASSE Standard 1019 Certified

|                |             |     |   |    |
|----------------|-------------|-----|---|----|
| 08QTHW05-040NL | 1/2" x 3/4" | 4"  | 2 | 40 |
| 08QTHW05-060NL | 1/2" x 3/4" | 6"  | 2 | 40 |
| 08QTHW05-080NL | 1/2" x 3/4" | 8"  | 2 | 40 |
| 08QTHW05-100NL | 1/2" x 3/4" | 10" | 2 | 40 |
| 08QTHW05-120NL | 1/2" x 3/4" | 12" | 2 | 40 |
| 08QTHW05-140NL | 1/2" x 3/4" | 14" | 2 | 40 |



#### With Self Draining Vacuum Breaker Seat Material: Viton, Black Cast Hand Wheel Handle PEX x GHT Connection

Temperature Range: Up to 140°F (60°C), Maximum Pressure: 125 PSI

- 1/4 turn
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- ASSE Standard 1019 Certified

|                 |             |     |   |    |
|-----------------|-------------|-----|---|----|
| 08QTHW05P-080NL | 1/2" x 3/4" | 8"  | 2 | 40 |
| 08QTHW05P-100NL | 1/2" x 3/4" | 10" | 2 | 40 |
| 08QTHW05P-120NL | 1/2" x 3/4" | 12" | 2 | 40 |
| 08QTHW05P-140NL | 1/2" x 3/4" | 14" | 2 | 40 |



#### With Self Draining Vacuum Breaker Seat Material: Viton, Black Cast Hand Wheel Handle MPT or FPT x GHT Connection

Temperature Range: Up to 140°F (60°C), Maximum Pressure: 125 PSI

- 1/4 turn
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- ASSE Standard 1019 Certified

|                |                     |     |   |    |
|----------------|---------------------|-----|---|----|
| 08QTHW07-100NL | 3/4" or 1/2" x 3/4" | 10" | 2 | 40 |
| 08QTHW07-120NL | 3/4" or 1/2" x 3/4" | 12" | 2 | 40 |
| 08QTHW07-140NL | 3/4" or 1/2" x 3/4" | 14" | 2 | 40 |



#### With Self Draining Vacuum Breaker Seat Material: Nitrile Rubber, Black Cast Hand Wheel Handle MPT or Copper x GHT Connection

Temperature Range: Up to 140°F (60°C), Maximum Pressure: 125 PSI

|          |             |     |   |    |
|----------|-------------|-----|---|----|
| 0865-040 | 1/2" x 3/4" | 4"  | 2 | 40 |
| 0865-060 | 1/2" x 3/4" | 6"  | 2 | 40 |
| 0865-080 | 1/2" x 3/4" | 8"  | 2 | 40 |
| 0865-100 | 1/2" x 3/4" | 10" | 2 | 40 |
| 0865-120 | 1/2" x 3/4" | 12" | 2 | 40 |
| 0865-140 | 1/2" x 3/4" | 14" | 2 | 40 |
| 0865-160 | 1/2" x 3/4" | 16" | 2 | 40 |
| 0865-180 | 1/2" x 3/4" | 18" | 2 | 40 |
| 0865-200 | 1/2" x 3/4" | 20" | 2 | 40 |
| 0865-220 | 1/2" x 3/4" | 22" | 2 | 40 |
| 0865-240 | 1/2" x 3/4" | 24" | 2 | 40 |



#### With Self Draining Vacuum Breaker, Seat Material: Nitrile Rubber, Black Cast Hand Wheel Handle MPT or Copper x GHT Connection

Temperature Range: Up to 140°F (60°C), Maximum Pressure: 125 PSI

- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- ASSE Standard 1019 Certified

|            |             |     |   |    |
|------------|-------------|-----|---|----|
| 0865-040NL | 1/2" x 3/4" | 4"  | 2 | 40 |
| 0865-060NL | 1/2" x 3/4" | 6"  | 2 | 40 |
| 0865-080NL | 1/2" x 3/4" | 8"  | 2 | 40 |
| 0865-100NL | 1/2" x 3/4" | 10" | 2 | 40 |
| 0865-120NL | 1/2" x 3/4" | 12" | 2 | 40 |
| 0865-140NL | 1/2" x 3/4" | 14" | 2 | 40 |



Contact your sales rep for any further information

Toll Free: 1-800-561-3164

boshart.com

### CHROME PLATED NON-FREEZE LAWN FAUCETS

| Part No. | Size | Length | Quantity |    |
|----------|------|--------|----------|----|
|          |      |        | L1       | L2 |



**With Self Draining Vacuum Breaker Seat Material: Nitrile Rubber,  
Black Cast Hand Wheel Handle  
PEX x GHT Connection**  
Temperature Range: Up to 140°F (60°C), Maximum Pressure: 125 PSI

|           |             |     |   |    |
|-----------|-------------|-----|---|----|
| 0865P-040 | 1/2" x 3/4" | 4"  | 2 | 40 |
| 0865P-060 | 1/2" x 3/4" | 6"  | 2 | 40 |
| 0865P-080 | 1/2" x 3/4" | 8"  | 2 | 40 |
| 0865P-100 | 1/2" x 3/4" | 10" | 2 | 40 |
| 0865P-120 | 1/2" x 3/4" | 12" | 2 | 40 |
| 0865P-140 | 1/2" x 3/4" | 14" | 2 | 40 |



**With Self Draining Vacuum Breaker Seat Material: Nitrile Rubber,  
Black Cast Hand Wheel Handle  
PEX x GHT Connection**  
Temperature Range: Up to 140°F (60°C), Maximum Pressure: 125 PSI

- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- ASSE Standard 1019 Certified

|             |             |     |   |    |
|-------------|-------------|-----|---|----|
| 0865P-040NL | 1/2" x 3/4" | 4"  | 2 | 40 |
| 0865P-060NL | 1/2" x 3/4" | 6"  | 2 | 40 |
| 0865P-080NL | 1/2" x 3/4" | 8"  | 2 | 40 |
| 0865P-100NL | 1/2" x 3/4" | 10" | 2 | 40 |
| 0865P-120NL | 1/2" x 3/4" | 12" | 2 | 40 |
| 0865P-140NL | 1/2" x 3/4" | 14" | 2 | 40 |



### VACUUM BREAKERS

Vacuum Breakers install easily to any 3/4" hose faucet to provide back-siphonage protection. They feature a break-away set screw to make a permanent vandal-proof installation.

- CSA Standard B64.2 Certified
- ASSE Standard 1011 Certified

| Part No. | Size | Quantity |    |
|----------|------|----------|----|
|          |      | L1       | L2 |



**Manual Draining Brass,  
FGHT x MGHT Connection**  
Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI

|         |      |    |     |
|---------|------|----|-----|
| 0881-07 | 3/4" | 10 | 200 |
|---------|------|----|-----|



**Manual Draining Brass,  
FGHT x MGHT Connection**  
Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI

|           |      |    |     |
|-----------|------|----|-----|
| 0881-07NL | 3/4" | 10 | 200 |
|-----------|------|----|-----|



**Auto Draining Brass,  
FGHT x MGHT Connection**  
Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI  
Self-drains when all hose attachments are removed, protecting the valve or faucet from freezing in colder weather.

|           |      |    |     |
|-----------|------|----|-----|
| 0882-07NL | 3/4" | 10 | 200 |
|-----------|------|----|-----|



Contact your sales rep for any further information

**Toll Free: 1-800-561-3164**  
**boshart.com**

Rev. 5.6

### CHROME PLATED SUPPLY STOPS

Supply stops are an excellent low pressure shut off valve generally found at the appliance. They come in different connections and configurations to meet all needs.

**Seat Material: PTFE, Stem Packing Material: EPDM,**

**Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI**

- 1/4 Turn
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- Connections conform to the following standards
  - Threads ANSI/ASME B1.20.1
  - CxC ANSI B16.18

- CPVC ASTM D2846
- PEX ASTM F1807
- Push Fit ASSE 1061
- Compression SAE J512
- Cold Expansion ASTM F1960

| Part No. | Size | Connection Type | Quantity |    |
|----------|------|-----------------|----------|----|
|          |      |                 | L1       | L2 |



#### Angled

|                  |             |                       |    |     |
|------------------|-------------|-----------------------|----|-----|
| 08SVA-03FNL      | 3/8"        | FPT x Comp            | 20 | 240 |
| 08SVA-05CEPNL    | 1/2" x 3/8" | Cold Expansion x Comp | 20 | 240 |
| 08SVA-05CNL      | 1/2" x 3/8" | Copper x Comp         | 20 | 240 |
| 08SVA-05FNL      | 1/2" x 3/8" | FPT x Comp            | 20 | 240 |
| 08SVA-05PF02CPNL | 1/2" x 1/4" | Push Fit x Comp       | 20 | 240 |
| 08SVA-05PFNL     | 1/2" x 3/8" | Push Fit x Comp       | 20 | 240 |
| 08SVA-05PNL      | 1/2" x 3/8" | PEX x Comp            | 20 | 240 |
| 08SVA-05VNL      | 1/2" x 3/8" | CPVC x Comp           | 20 | 240 |
| 08SVA-58CPNL     | 5/8" x 3/8" | Comp                  | 20 | 240 |



#### Dual Outlet

|                  |                    |            |    |     |
|------------------|--------------------|------------|----|-----|
| 08SVD-05F03CPNL  | 1/2" x 3/8" x 3/8" | FPT x Comp | 20 | 240 |
| 08SVD-58CP03CPNL | 5/8" x 3/8" x 3/8" | Comp       | 20 | 240 |



#### Dual Outlet Dual Shut-Off

|                   |             |            |    |     |
|-------------------|-------------|------------|----|-----|
| 08SVDD-05F03CPNL  | 1/2" x 3/8" | FPT x Comp | 10 | 120 |
| 08SVDD-58CP03CPNL | 5/8" x 3/8" | Comp       | 10 | 120 |



#### Straight

|                |             |                           |    |     |
|----------------|-------------|---------------------------|----|-----|
| 08SVS-03FNL    | 3/8"        | FPT x Comp                | 20 | 240 |
| 08SVS-05CEPNL  | 1/2" x 3/8" | Cold Expansion x Comp     | 20 | 240 |
| 08SVS-05CNL    | 1/2" x 3/8" | Copper x Comp             | 20 | 240 |
| 08SVS-05FNL    | 1/2" x 3/8" | FPT x Comp                | 20 | 240 |
| 08SVS-05P05PNL | 1/2"        | PEX                       | 20 | 240 |
| 08SVS-05PFNL   | 1/2" x 3/8" | Push Fit x Comp           | 20 | 240 |
| 08SVS-05PNL    | 1/2" x 3/8" | PEX x Comp                | 20 | 240 |
| 08SVS-05VNL    | 1/2" x 3/8" | CPVC x Comp               | 20 | 240 |
| 08SVS-58CPNL   | 5/8" x 3/8" | Comp                      | 20 | 240 |
| 08SVS-RFNL     | 3/8"        | Female Comp Swivel x Comp | 20 | 240 |



#### Tee

|                  |             |                 |    |     |
|------------------|-------------|-----------------|----|-----|
| 08SVT-05PF02CPNL | 1/2" x 1/4" | Push Fit x Comp | 10 | 120 |
| 08SVT-05PFNL     | 1/2" x 3/8" | Push Fit x Comp | 10 | 120 |



Contact your sales rep for any further information

Toll Free: 1-800-561-3164

boshart.com

### ICE MAKER CHROME PLATED SUPPLY STOPS

Supply stops are an excellent low pressure shut off valve generally found at appliances. They come in different connections and configurations to meet all needs.

Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI

- 1/4 Turn
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- Connections conform to the following standards
  - Threads ANSI/ASME B1.20.1

- CxC ANSI B16.18
- Crimp PEX08sva end conform to ASTM F1807
- Compression SAE J512

| Part No. | Size | Quantity |    |
|----------|------|----------|----|
|          |      | L1       | L2 |

#### Ice Maker Copper x Comp

|                 |             |    |     |
|-----------------|-------------|----|-----|
| 08SVA-05C02CPNL | 1/2" x 1/4" | 20 | 240 |
|-----------------|-------------|----|-----|



#### Ice Maker FPT x Comp

|                 |             |    |     |
|-----------------|-------------|----|-----|
| 08SVA-05F02CPNL | 1/2" x 1/4" | 20 | 240 |
|-----------------|-------------|----|-----|



| Part No. | Size | Quantity |    |
|----------|------|----------|----|
|          |      | L1       | L2 |

#### Ice Maker Crimp PEX x Compression

|                 |             |    |     |
|-----------------|-------------|----|-----|
| 08SVA-05P02CPNL | 1/2" x 1/4" | 20 | 240 |
|-----------------|-------------|----|-----|



#### Ice Maker Comp

|                  |             |    |     |
|------------------|-------------|----|-----|
| 08SVA-58CP02CPNL | 5/8" x 1/4" | 20 | 240 |
|------------------|-------------|----|-----|



### WASHING MACHINE CHROME PLATED SUPPLY STOPS

Supply stops are an excellent low pressure shut off valve generally found at appliances. They come in different connections and configurations to meet all needs. These washing machine valves have color coded handles for hot and cold water supplies.

Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI

- 1/4 Turn
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- Connections conform to the following standards
  - Threads ANSI/ASME B1.20.1

- CxC ANSI B16.18
- Crimp PEX end conforms to ASTM F1807
- Compression SAE J512



| Part No. | Size | Quantity |    |
|----------|------|----------|----|
|          |      | L1       | L2 |

#### Angled Blue Plastic Handle MPT or Comp x GHT

|                |             |    |     |
|----------------|-------------|----|-----|
| 08SVAWMB-05MNL | 1/2" x 3/4" | 20 | 240 |
|----------------|-------------|----|-----|



#### Angled Blue Plastic Handle Crimp PEX x GHT

|                |             |    |     |
|----------------|-------------|----|-----|
| 08SVAWMB-05PNL | 1/2" x 3/4" | 20 | 240 |
|----------------|-------------|----|-----|



#### Angled Blue Plastic Handle CPR x GHT

|                 |             |    |     |
|-----------------|-------------|----|-----|
| 08SVAWMB-58CPNL | 5/8" x 3/4" | 20 | 240 |
|-----------------|-------------|----|-----|



| Part No. | Size | Quantity |    |
|----------|------|----------|----|
|          |      | L1       | L2 |

#### Angled Red Plastic Handle MPT or Comp x GHT

|                |             |    |     |
|----------------|-------------|----|-----|
| 08SVAWMR-05MNL | 1/2" x 3/4" | 20 | 240 |
|----------------|-------------|----|-----|



#### Angled Red Plastic Handle Crimp PEX x GHT

|                |             |    |     |
|----------------|-------------|----|-----|
| 08SVAWMR-05PNL | 1/2" x 3/4" | 20 | 240 |
|----------------|-------------|----|-----|



#### Angled Red Plastic Handle CPR x GHT

|                 |             |    |     |
|-----------------|-------------|----|-----|
| 08SVAWMR-58CPNL | 5/8" x 3/4" | 20 | 240 |
|-----------------|-------------|----|-----|



Contact your sales rep for any further information

Toll Free: 1-800-561-3164  
boshart.com

Rev. 5.1