SECTION 2

PLUMBING VALVES

Offering a variety of connection types for a wide range of applications

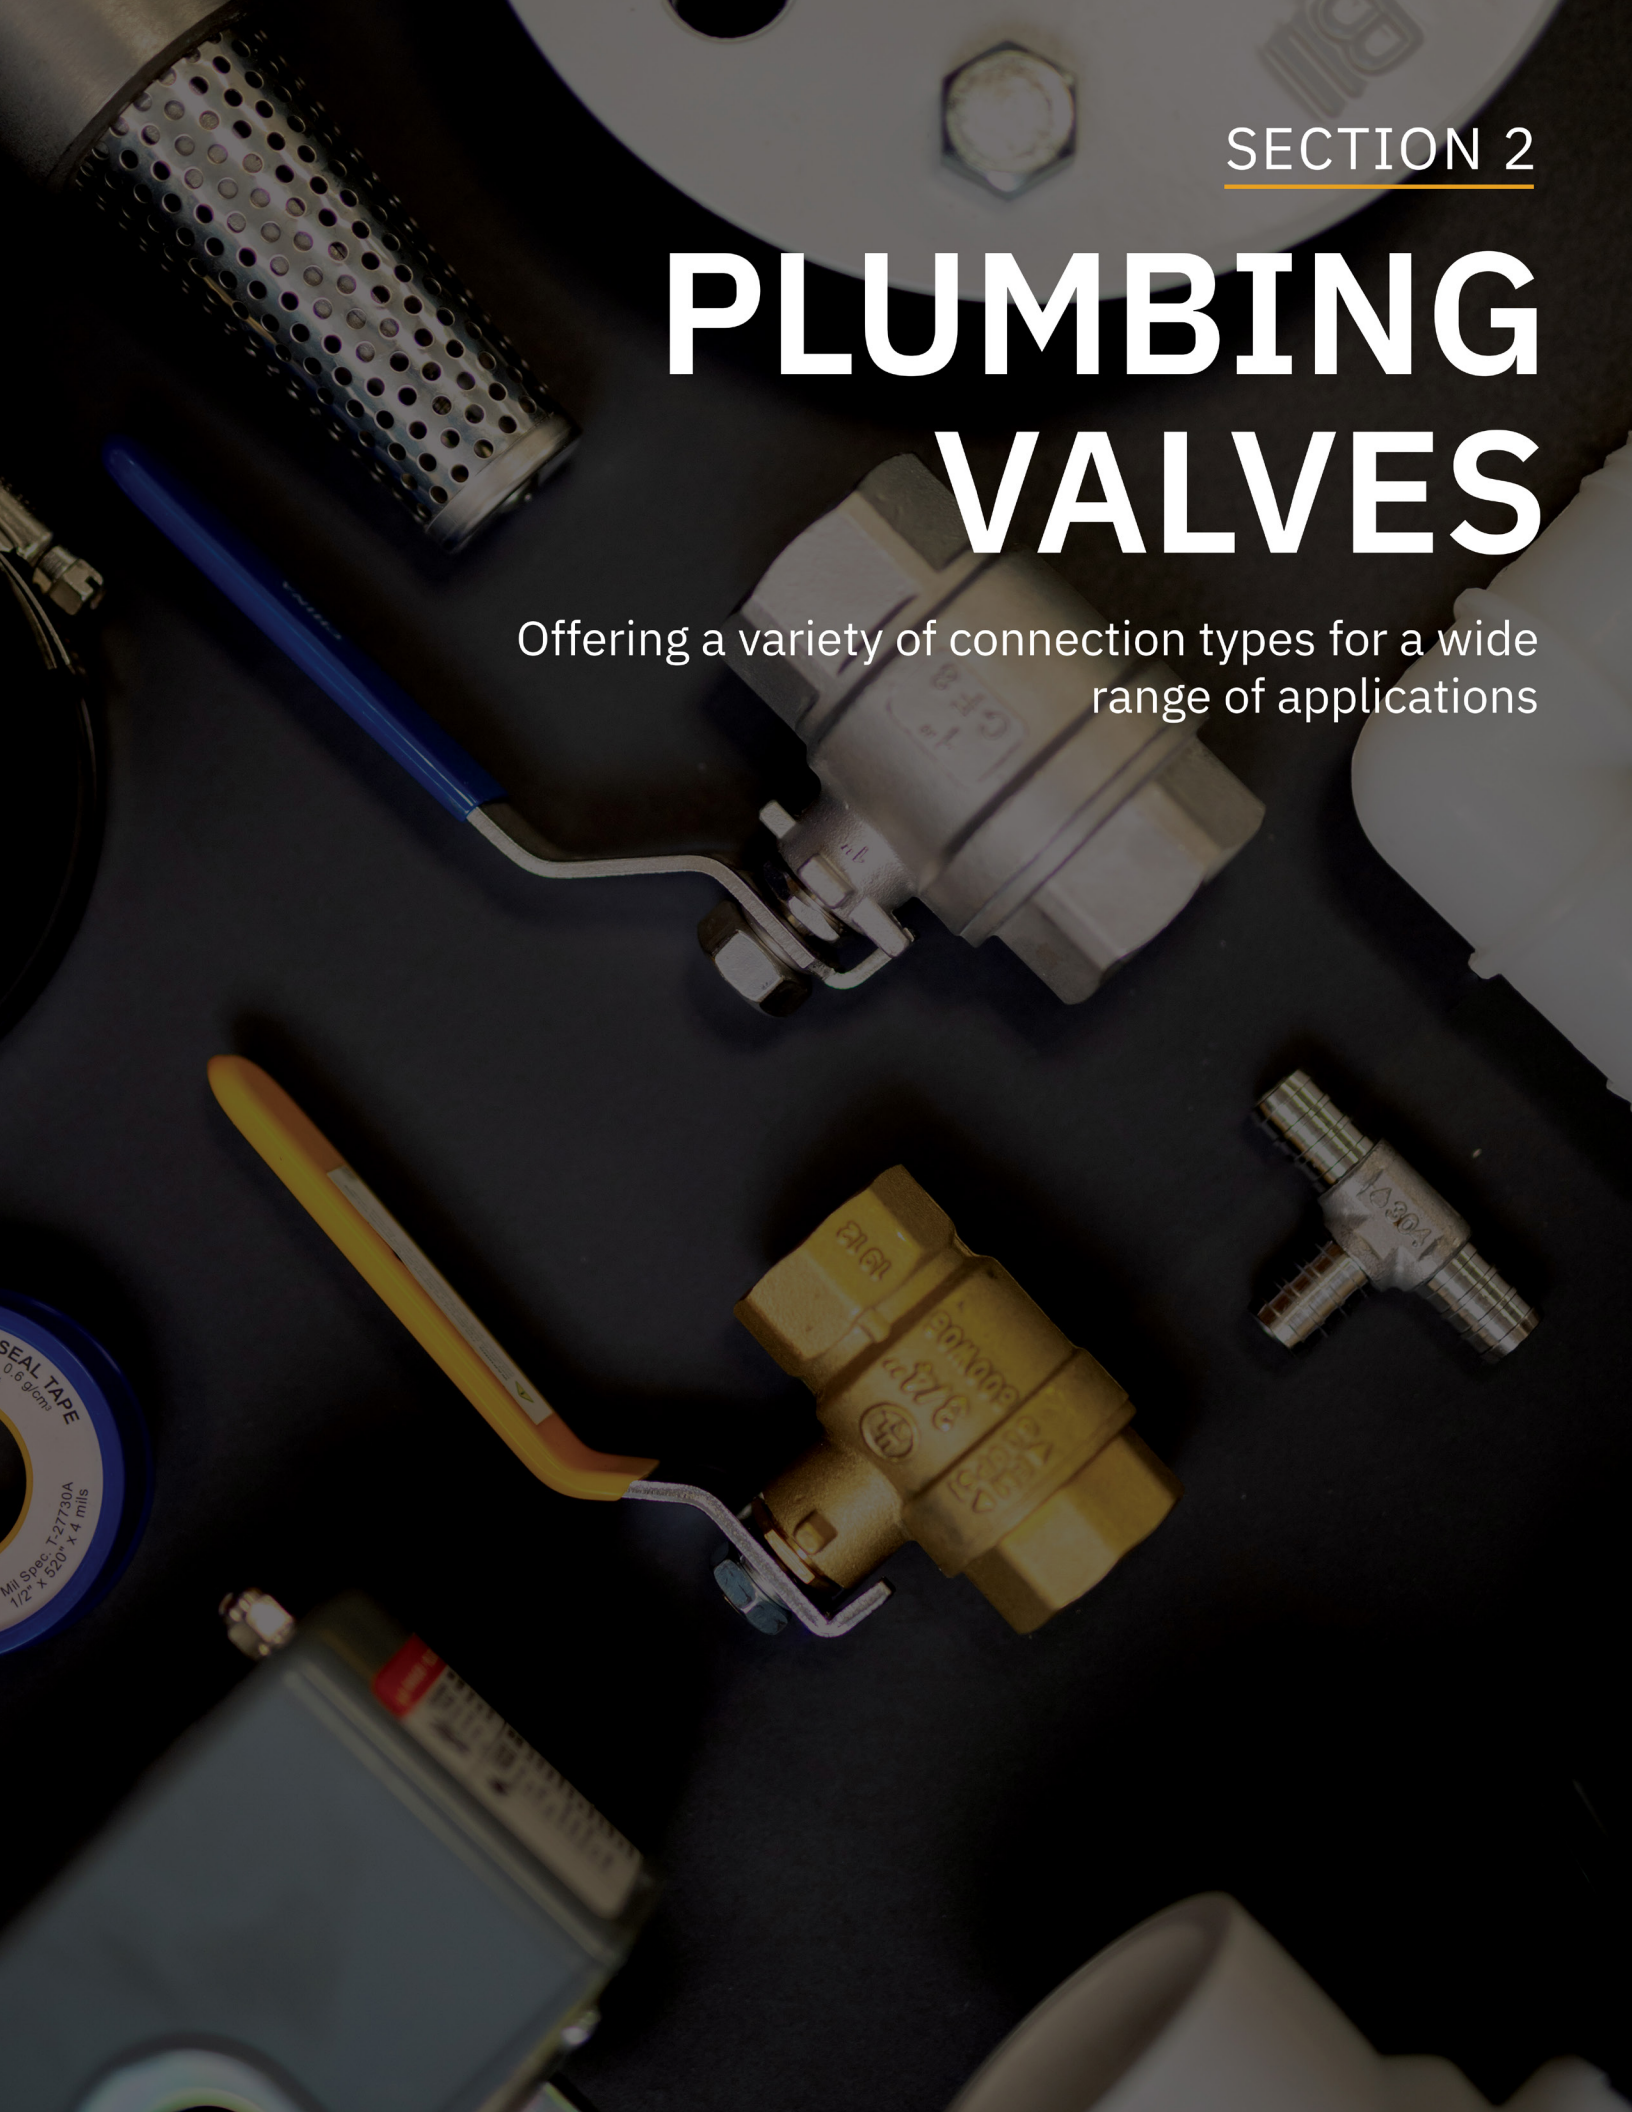

INDEX

Product Line	Page
Brass Gate Valves	1
Mini Brass Ball Valves	2
Brass Ball Valves	2
Brass Ball Valves with Drain	6
Brass Ball Valves - Locking Handle	7
Stainless Steel Ball Valves	8
Cold Expansion PEX Stainless Steel Ball Valves	9
PVC Ball Valves	9
Premium PVC Ball Valves	10
Gas Ball Valves	13
Bent Nose Garden Valves	14
Hose Bibbs / Sampling Faucets	15
No-Kink Hose Bibbs	16
Brass Sillcocks	16
Sediment Faucets / Boiler Drains	17
Stop / Stop & Waste Valves	18
Chrome Plated Non-Freeze Lawn Faucets	18
Vacuum Breakers	20
Chrome Plated Supply Stops	21
Ice Maker Chrome Plated Supply Stops	22
Washing Machine Chrome Plated Supply Stops	22

BOSHART INDUSTRIES

BRASS GATE VALVES

Brass gate valves are used to shut off water supply. They are an excellent choice where this needs to be done slowly by turning the black hand wheel. No lead options are available for potable water applications.

Full Port Brass, Stem Packing Material: PTFE, Black Cast Hand Wheel Handle
FPT Connection
Temperature Range: Up to 150°F (66°C), Maximum Pressure: 200 PSI CWP
• NSF/ANSI Standard 61 & 372 Certified

NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Port Size	Quantity L1	Quantity L2
0818-02NL	1/4"	0.43"	10	120
0818-03NL	3/8"	0.47"	10	120
0818-05NL	1/2"	0.53"	10	120
0818-07NL	3/4"	0.75"	10	80
0818-10NL	1"	0.98"	5	60
0818-12NL	1-1/4"	1.26"	5	40
0818-15NL	1-1/2"	1.50"	5	30
0818-20NL	2"	1.93"	2	20
0818-25NL	2-1/2"	2.44"	2	12
0818-30NL	3"	2.95"	8	
0818-40NL	4"	3.62"	4	

Full Port Brass, Stem Packing Material: PTFE, Black Cast Hand Wheel Handle
CxC Connection
Temperature Range: Up to 150°F (66°C), Maximum Pressure: 200 PSI CWP
• NSF/ANSI Standard 61 & 372 Certified

NO LEAD <0.25% Pb by weighted avg.

0818C-05NL	1/2"	0.53"	10	120
0818C-07NL	3/4"	0.75"	10	80
0818C-10NL	1"	0.98"	5	60
0818C-12NL	1-1/4"	1.26"	5	40
0818C-15NL	1-1/2"	1.50"	5	30
0818C-20NL	2"	1.93"	2	20

Full Port Brass, Stem Packing Material: PTFE, Black Cast Hand Wheel Handle
FPT Connection
Temperature Range: Up to 150°F (66°C), Maximum Pressure: 200 PSI CWP

0818-05	1/2"	0.53"	10	120
0818-07	3/4"	0.75"	10	80
0818-10	1"	0.98"	5	60
0818-12	1-1/4"	1.26"	5	40
0818-15	1-1/2"	1.50"	5	30
0818-20	2"	1.93"	2	20
0818-25	2-1/2"	2.44"	2	12
0818-30	3"	2.95"	8	
0818-40	4"	3.62"	4	

BOSHART INDUSTRIES

MINI BRASS BALL VALVES

These ball valves are designed as an easy shut off in 1/4" or 1/8" pipe applications. They are no lead and can be used for potable water applications.

Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Tee Handle
FPT Connection
Temperature Range: Up to 180°F (82°C), Maximum Pressure: 600 PSI CWP
• NSF/ANSI Standard 372 Certified

Part No.	Size	Port Size	Quantity L1	Quantity L2
0828-01NL	1/8"	0.30"	20	200
0828-02NL	1/4"	0.30"	20	200

Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Tee Handle
MPT x FPT Connection
Temperature Range: Up to 180°F (82°C), Maximum Pressure: 600 PSI CWP
• NSF/ANSI Standard 372 Certified

Part No.	Size	Port Size	Quantity L1	Quantity L2
0828-01M01FNL	1/8"	0.30"	20	200
0828-01M02FNL	1/8" x 1/4"	0.30"	20	200
0828-02M02FNL	1/4"	0.30"	20	200

BRASS BALL VALVES

Boshart's Brass Ball Valves are an excellent choice for a variety of applications where there is low risk of corrosion. Most connections come in both a leaded and no lead version to accommodate for potable water.

Standard Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle
Comp Connection
Temperature Range: Up to 300°F (149°C), Maximum Pressure: 200 PSI CWP
• NSF/ANSI Standard 61 & 372 Certified
• cUPC Standard IGC 157 Certified
Note: Can be used to make connections between Copper, Brass, Aluminum, Plastic, CPVC & Pex tubing. Not recommended for use with steel tubing, designed for use with tube manufactured to CTS-OD tubing.

Part No.	Size	Port Size	Quantity L1	Quantity L2
082CPND-05NL	1/2"	0.59"	10	100
082CPND-07NL	3/4"	0.78"	10	60
082CPND-10NL	1"	0.98"	6	30

Standard Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle
PEX Connection
Temperature Range: Up to 203°F (95°C), Maximum Pressure: 400 PSI CWP
• NSF/ANSI Standard 61 & 372 Certified
• cUPC Standard IGC 157 Certified

Part No.	Size	Port Size	Quantity L1	Quantity L2
0821P-03NL	3/8"	0.39"	10	120
0821P-05NL	1/2"	0.39"	10	120
0821P-07NL	3/4"	0.59"	10	90
0821P-10NL	1"	0.79"	6	30

BOSHART INDUSTRIES

BRASS BALL VALVES

Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE,
Ball Material: Stainless Steel, PVC Handle
FPT Connection

NO LEAD <0.25% Pb by weighted avg.

Temperature Range: -20°F to 300°F (-29°C to 149°C), Maximum Pressure: 600 PSI CWP
- NSF/ANSI Standard 61 & 372 Certified
- cUPC Standard z1157 Certified
- CSA listed to the following standard
  - ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
- Threads conform to ANSI / ASME B1.20.1

Part No.	Size	Port Size	Quantity L1	Quantity L2
0825-02NL	1/4"	0.39"	12	120
0825-03NL	3/8"	0.39"	12	120
0825-05NL	1/2"	0.59"	10	100
0825-07NL	3/4"	0.78"	8	64
0825-10NL	1"	0.98"	6	30
0825-12NL	1-1/4"	1.26"	6	24
0825-15NL	1-1/2"	1.57"	4	16
0825-20NL	2"	1.97"	2	8

Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE,
Ball Material: Stainless Steel, PVC Handle
CxC Connection

Temperature Range: -20°F to 300°F (-29°C to 149°C), Maximum Pressure: 600 PSI CWP
- NSF/ANSI Standard 61 & 372 Certified
- cUPC Standard z1157 Certified
- CSA listed to the following standard
- Solder ends conform to ANSI B16.18

Part No.	Size	Port Size	Quantity L1	Quantity L2
0825C-05NL	1/2"	0.59"	10	100
0825C-07NL	3/4"	0.79"	8	64
0825C-10NL	1"	0.98"	6	30
0825C-12NL	1-1/4"	1.26"	6	24
0825C-15NL	1-1/2"	1.58"	4	16
0825C-20NL	2"	1.97"	2	8

Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE,
Ball Material: Stainless Steel, PVC Handle
FPT Connection

Temperature Range: Up to 300°F (149°C), Maximum Pressure: 600 PSI CWP
- NSF/ANSI Standard 61 & 372 Certified
- cUPC Standard Z1157 Certified
- CSA listed to the following standards (1/4" - 2" only)
  - ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
  - ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
  - ASME B16.33 & CAN/CGA 3.16 : 125 PSIG (BRS125G / CAN 3.16)
- UL listed to the following standards (1/4" - 4" only)
  - UL 1477 (YQNZ): Compressed gas shutoff valves - 600 PSI (1/4" - 1") 250 PSI (2-1/2" - 4")
  - UL 842 (YRBX): Flammable liquid shutoff valves - 600 PSI (1/4" - 1") 250 PSI (2-1/2" - 4")
  - UL 842 (YRPV): Gas shutoff valves - 600 PSI (1/4" - 1") 250 PSI (2-1/2" - 4"))
  - UL 842 (MHKZ): Manual valves - 600 PSI (1/4" - 1") 250 PSI (2-1/2" - 4")
  - UL 125 (YSDT): LP-Gas shutoff valves - 600 PSI (1/4" - 1") 250 PSI (2-1/2" - 4")
- FM Standard 1140 Certified (1/4" - 2" only)

Part No.	Size	Port Size	Quantity L1	Quantity L2
0827-02NL	1/4"	0.39"	12	120
0827-03NL	3/8"	0.39"	12	120
0827-05NL	1/2"	0.59"	10	100
0827-07NL	3/4"	0.75"	8	64
0827-10NL	1"	0.98"	6	30
0827-12NL	1-1/4"	1.25"	6	24
0827-15NL	1-1/2"	1.57"	4	16
0827-20NL	2"	1.97"	2	8
0827-25NL	2-1/2"	2.52"	2	4
0827-30NL	3"	2.95"	4	
0827-40NL	4"	3.90"	2	

BOSHART INDUSTRIES

BRASS BALL VALVES

Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Stainless Steel, PVC Handle
CxC Connection
Temperature Range: Up to 300°F (149°C), Maximum Pressure: 600 PSI CWP
• NSF/ANSI Standard 61 & 372 Certified
• cUPC Standard z1157 Certified
• FM Standard 1140 Certified (1/2" - 2" only)

Part No.	Size	Port Size	Quantity L1	Quantity L2
0827C-05NL	1/2"	0.59"	10	100
0827C-07NL	3/4"	0.75"	8	64
0827C-10NL	1"	0.98"	6	30
0827C-12NL	1-1/4"	1.25"	6	24
0827C-15NL	1-1/2"	1.57"	4	16
0827C-20NL	2"	1.97"	2	8
0827C-25NL	2-1/2"	2.52"	2	4
0827C-30NL	3"	2.95"	4	
0827C-40NL	4"	3.90"	2	

Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, PVC Handle
FPT Connection
Temperature Range: Up to 300°F (149°C), Maximum Pressure: 600 PSI CWP
• cUPC Standard z1157 Certified
• CSA listed to the following standards (1/4" - 4" only)
- ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
- ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
- ASME B16.33 & CAN/CGA 3.16 : 125 PSIG (BRS125G / CAN 3.16)
• UL listed to the following standards (1/4" - 4" only)
- UL 1477 (YQNZ): Compressed gas shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2") 250 PSI (2-1/2" - 4")
- UL 842 (YRBX): Flammable liquid shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2") 250 PSI (2-1/2" - 4")
- UL 842 (YRPV): Gas shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2") 300 PSI (1-1/4" - 2" 250 PSI (2-1/2" - 4")
- UL 842 (MHKZ): Manual valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2") 300 PSI (1-1/4" - 2") 250 PSI (2-1/2" - 4")
- UL 125 (YSDT): LP-Gas shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2") 300 PSI (1-1/4" - 2") 250 PSI (2-1/2" - 4")
• FM Standard 1140 Certified (1/4" - 2" only)
• Stainless Steel Ball for sizes 1-1/4" to 4"

Part No.	Size	Port Size	Quantity L1	Quantity L2
0827-02	1/4"	0.39"	12	120
0827-03	3/8"	0.39"	12	120
0827-05	1/2"	0.59"	10	100
0827-07	3/4"	0.75"	8	64
0827-10	1"	0.98"	6	30
0827-12	1-1/4"	1.25"	6	24
0827-15	1-1/2"	1.57"	4	16
0827-20	2"	1.97"	2	8
0827-25	2-1/2"	2.52"	2	4
0827-30	3"	2.95"	4	
0827-40	4"	3.90"	2	

BOSHART INDUSTRIES

BRASS BALL VALVES

Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Stainless Steel, Rubber Grip Handle
CxC Connection
Temperature Range: Up to 300°F (149°C), Maximum Pressure: 600 PSI CWP
• cUPC Standard z1157 Certified
• FM Standard 1140 Certified (1/2" - 2" only)

Part No.	Size	Port Size	Quantity L1	Quantity L2
0827C-05	1/2"	0.59"	10	100
0827C-07	3/4"	0.75"	8	64
0827C-10	1"	0.98"	6	30
0827C-12	1-1/4"	1.25"	6	24
0827C-15	1-1/2"	1.57"	4	16
0827C-20	2"	1.97"	2	8
0827C-25	2-1/2"	2.52"	2	4
0827C-30	3"	2.95"	4	
0827C-40	4"	3.90"	2	

Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle
Push Fit Connection
Temperature Range: Up to 200°F (93°C), Maximum Pressure: 200 PSI
• NSF/ANSI Standard 61 & 372 Certified
• ASSE Standard 1061 Certified

082PF-05NL	1/2"	0.63"	10	120
082PF-07NL	3/4"	0.88"	10	60
082PF-10NL	1"	1.13"	6	30

BOSHART INDUSTRIES

BRASS BALL VALVES WITH DRAIN

Boshart's Brass Ball Valves with a drain are perfect for applications where water needs to be drained from the pipe after the valve. When installing one of these valves make sure the drain is not installed on the supply side of the valve.

Standard Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle
Comp Connection
Temperature Range: Up to 300°F (149°C), Maximum Pressure: 200 PSI CWP
• NSF/ANSI Standard 61 & 372 Certified
• cUPC Standard IGC 157 Certified
Note: Can be used to make connections between Copper, Brass, Aluminum, Plastic, CPVC & Pex tubing. Not recommended for use with steel tubing, designed for use with tube manufactured to CTS-OD tubing.

Part No.	Size	Port Size	Quantity L1	Quantity L2
082CP-05NL	1/2"	0.59"	10	100
082CP-07NL	3/4"	0.79"	10	60
082CP-10NL	1"	0.98"	6	30

Standard Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle
PEX Connection
Temperature Range: Up to 203°F (95°C), Maximum Pressure: 400 PSI CWP
• NSF/ANSI Standard 61 & 372 Certified
• cUPC Standard IGC 157 Certified

0821WDP-05NL	1/2"	0.39"	10	120
0821WDP-07NL	3/4"	0.59"	10	90
0821WDP-10NL	1"	0.79"	6	30

Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle
FPT Connection
Temperature Range: Up to 300°F (149°C), Maximum Pressure: 600 PSI WOG
• NSF/ANSI Standard 61 & 372 Certified
• cUPC Standard IGC 157 Certified

082WD-05NL	1/2"	0.59"	10	120
082WD-07NL	3/4"	0.75"	10	60
082WD-10NL	1"	1.02"	6	30

Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle
CxC Connection
Temperature Range: Up to 300°F (149°C), Maximum Pressure: 600 PSI WOG
• NSF/ANSI Standard 61 & 372 Certified
• cUPC Standard IGC 157 Certified

082WDC-05NL	1/2"	0.59"	10	120
082WDC-07NL	3/4"	0.75"	10	60
082WDC-10NL	1"	1.02"	6	30

Full Port Brass, Seat Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle
Push Fit Connection
Temperature Range: Up to 200°F (93°C), Maximum Pressure: 200 PSI
• NSF/ANSI Standard 61 & 372 Certified
• ASSE Standard 1061 Certified

082PF-05WDNL	1/2"	0.63"	10	120
082PF-07WDNL	3/4"	0.88"	10	60
082PF-10WDNL	1"	1.13"	6	30

BOSHART INDUSTRIES

BRASS BALL VALVES - LOCKING HANDLE

Boshart's Brass Ball Valves with a locking handle can be locked in the open or closed position with a padlock. This provides more security and prevents the ball valve from being tampered with.

Full Port Brass, Seat Material: PTFE, Stem Packing Material: Viton, Ball Material: Chrome Plated, Rubber Grip Handle
FPT Connection
Temperature Range: Up to 350°F (177°C), Maximum Pressure: 600 PSI CWP
Maximum Pressure Rating of 450 PSI CWP for sizes 2-1/2" to 4"
• CSA listed to the following standards (1/4" - 2" only)
- ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
- ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
- ASME B16.33 & CAN/CGA 3.16 : 125 PSIG (BRS125G / CAN 3.16)
• UL listed to the following standards
- UL 258 (VQGU): Trim and drain valves - 600 PSI (1/4" - 2")
- UL 1477 (YQNZ): Compressed gas shutoff valves - 600 PSI (1/4" - 2") 450 PSI (2-1/2" - 4")
- UL 842 (YRBX): Flammable liquid shutoff valves - 600 PSI (1/4" - 2") 250 PSI (2-1/2" - 4")
- UL 842 (YRPV): Gas shutoff valves - 600 PSI (1/4" - 2") 250 PSI (2-1/2" - 4")
- UL 842 (MHKZ): Manual valves - 600 PSI (1/4" - 2") 250 PSI (2-1/2" - 4")
- UL 125 (YSDT): LP-Gas shutoff valves - 600 PSI (1/4" - 2") 450 PSI (2-1/2" - 4")
• Manufactured according to MSS SP-110
Note: Padlock not included.

Part No.	Size	Port Size	Quantity L1	Quantity L2
0826LH-02	1/4"	0.31"	12	192
0826LH-03	3/8"	0.39"	12	192
0826LH-05	1/2"	0.59"	8	128
0826LH-07	3/4"	0.79"	12	96
0826LH-10	1"	0.98"	8	64
0826LH-12	1-1/4"	1.26"	8	32
0826LH-15	1-1/2"	1.57"	6	24
0826LH-20	2"	1.97"	4	16
0826LH-25	2-1/2"	2.56"	2	
0826LH-30	3"	3.15"		
0826LH-40	4"	3.94"		

BOSHART INDUSTRIES

STAINLESS STEEL BALL VALVES

Boshart's Stainless Steel Ball Valves come in 2 different materials to suit a variety of applications. 304 CF8 Stainless Steel can be used in conventional situations, where 316 CF8M Stainless Steel can be used in more demanding environments.
Please note that SSPEXBV-05, SSPEXBV-07 and SSPEXBV-10 are only available with 304 Stainless Steel.

304 Stainless Steel, Seat Material: PTFE, Stem Packing Material: Nitrile Rubber, Ball Material: Stainless Steel, Stainless Steel
Crimp PEX Connection
Temperature Range: -40°F to 200°F (-40°C to 93°C), Maximum Pressure: 600 PSI CWP
- NSF/ANSI Standard 61 & 372 Certified
- cUPC Certified
- Crimp PEX end conforms to ASTM F1807

Part No.	Size	Port Size	Quantity L1	Quantity L2
SSPEXBV-05	1/2"	0.35"	20	120
SSPEXBV-07	3/4"	0.47"	15	90
SSPEXBV-10	1"	0.67"	5	30

Full Port 316 Stainless Steel, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Stainless Steel, Stainless Steel Locking Handle
FPT Connection
Temperature Range: Up to 450°F (232°C), Maximum Pressure: 1000 PSI
- NSF/ANSI Standard 372 Certified

Part No.	Size	Port Size	Quantity L1	Quantity L2
SSBV1000-02	1/4"	0.45"	15	90
SSBV1000-03	3/8"	0.47"	15	90
SSBV1000-05	1/2"	0.59"	9	54
SSBV1000-07	3/4"	0.78"	6	36
SSBV1000-10	1"	0.98"	4	24
SSBV1000-12	1-1/4"	1.26"	2	12
SSBV1000-15	1-1/2"	1.49"	6	12
SSBV1000-20	2"	1.96"	3	6
SSBV1000-25	2-1/2"	2.55"	4	
SSBV1000-30	3"	3.15"		

Standard Port 316 Stainless Steel, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Stainless Steel, Stainless Steel Locking Handle
FPT Connection
Temperature Range: Up to 450°F (232°C), Maximum Pressure: 2000 PSI
- NSF/ANSI Standard 372 Certified

Part No.	Size	Port Size	Quantity L1	Quantity L2
SSBV2000-02	1/4"	0.37"	12	72
SSBV2000-03	3/8"	0.37"	12	72
SSBV2000-05	1/2"	0.50"	36	72
SSBV2000-07	3/4"	0.69"	6	36
SSBV2000-10	1"	0.88"	5	30
SSBV2000-12	1-1/4"	1.00"	2	12
SSBV2000-15	1-1/2"	1.25"	6	12
SSBV2000-20	2"	1.50"	4	8

Full Port 304 Stainless Steel, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Stainless Steel, Stainless Steel
FPT Connection
Temperature Range: 14°F to 248°F (-10°C to 120°C), Maximum Pressure: 1000 PSI
- NSF/ANSI Standard 372 Certified

Part No.	Size	Port Size	Quantity L1	Quantity L2
SSBV304-02	1/4"	0.43"	20	120
SSBV304-03	3/8"	0.49"	20	120
SSBV304-05	1/2"	0.59"	16	96
SSBV304-07	3/4"	0.79"	10	60
SSBV304-10	1"	0.98"	10	40
SSBV304-12	1-1/4"	1.26"	6	24
SSBV304-15	1-1/2"	1.50"	4	16
SSBV304-20	2"	1.97"	2	12
SSBV304-25	2-1/2"	2.56"	2	4
SSBV304-30	3"	2.99"	4	
SSBV304-40	4"	3.70"	2	

COLD EXPANSION PEX STAINLESS STEEL BALL VALVES

Boshart's Stainless Steel Cold Expansion PEX Ball Valves are premium quality and durable. Featuring high corrosion resistance, and are ideal for areas with high acidity and anywhere water quality is an issue.

Standard Port 304 Stainless Steel, Seat Material: PTFE, Stem Packing Material: Nitrile Rubber, Ball Material: Stainless Steel, Stainless Steel Blue Plastic Handle
CE PEX Connection
Temperature Range: -40°F to 200°F (-40°C to 93°C), Maximum Pressure: 600 PSI CWP

Part No.	Size	Port Size	Quantity L1	Quantity L2
SSCEPBV-05	1/2"	0.38"	20	120
SSCEPBV-07	3/4"	0.60"	10	60
SSCEPBV-10	1"	0.80"	5	30

PVC BALL VALVES

PVC Ball Valves are durable and excellent for a variety of applications, including water supply, swimming pools, and irrigation applications. 0922CTS series are for hot water applications.

PVC, Seat Material: EPDM, Stem Packing Material: EPDM, Ball Material: PVC, ABS Tee Handle
FPT Connection
Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)
• NSF/ANSI Standard 372 Certified
Suitable for both Schedule 40 & 80 PVC Pipe.

NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Port Size	Quantity L1	Quantity L2
0929-05	1/2"	0.59"	200	
0929-07	3/4"	0.79"	160	
0929-10	1"	0.98"	96	
0929-12	1-1/4"	1.26"	72	
0929-15	1-1/2"	1.42"	45	
0929-20	2"	1.81"	36	
0929-25	2-1/2"	2.48"	12	
0929-30	3"	3.15"	8	
0929-40	4"	3.81"	6	

PVC, Seat Material: EPDM, Stem Packing Material: EPDM, Ball Material: PVC, ABS Tee Handle
Slip Connection
Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)
• NSF/ANSI Standard 372 Certified
Suitable for both Schedule 40 & 80 PVC Pipe.

NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Port Size	Quantity L1	Quantity L2
0929S-05	1/2"	0.59"	200	
0929S-07	3/4"	0.79"	160	
0929S-10	1"	0.98"	96	
0929S-12	1-1/4"	1.26"	72	
0929S-15	1-1/2"	1.42"	45	
0929S-20	2"	1.81"	36	
0929S-25	2-1/2"	2.48"	12	
0929S-30	3"	3.15"	8	
0929S-40	4"	3.81"	6	

BOSHART INDUSTRIES

PVC BALL VALVES

True Union UPVC, Seat Material: PTFE, Stem Packing Material: EPDM, Ball Material: UPVC, ABS Tee Handle
FPT or Slip Connection
Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)
Note: Double union / double block design permits in-line maintenance without disconnecting pipe. Ends are blocked with bayonet style lock to prevent ball from being blown out. Handle is equipped with removable spanner device.
Suitable for both Schedule 40 & 80 PVC Pipe.

NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Port Size	Quantity L1	Quantity L2
0924-05	1/2"	0.51"	48	
0924-07	3/4"	0.71"	36	
0924-10	1"	0.91"	24	
0924-12	1-1/4"	1.18"	24	
0924-15	1-1/2"	1.50"	24	
0924-20	2"	1.89"	12	

CPVC, Seat Material: PTFE, Stem Packing Material: EPDM, Ball Material: CPVC, ABS Tee Handle
CTS Connection
Temperature Range: Short: 212°F (100°C), Continous: 32°F to 194°F (0°C to 90°C),
Maximum Pressure: Working: 150 PSI @73°F (23°C), Test: 225 PSI
• NSF/ANSI Standard 61 & 372 Certified
Suitable for cold & hot water.

NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Port Size	Quantity L1	Quantity L2
0922CTS-05	1/2"	0.49"	360	
0922CTS-07	3/4"	0.72"	224	
0922CTS-10	1"	0.93"	120	
0922CTS-12	1-1/4"	0.98"	96	
0922CTS-15	1-1/2"	1.18"	72	
0922CTS-20	2"	1.42"	36	

PREMIUM PVC BALL VALVES

PVC Ball Valves are durable and excellent for a variety of applications, including water supply, swimming pools, and irrigation applications.

Molded in Place PVC, Seat Material: EPDM, Stem Packing Material: EPDM, Ball Material: PVC, ABS Tee Handle
FPT Connection
Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)
• NSF/ANSI Standard 61 & 372 Certified (1/2" to 2" only)

Suitable for both Schedule 40 & 80 PVC pipe.

Part No.	Size	Port Size	Quantity L1	Quantity L2
0921-05	1/2"	0.55"	100	
0921-07	3/4"	0.79"	100	
0921-10	1"	0.98"	100	
0921-12	1-1/4"	1.18"	100	
0921-15	1-1/2"	1.42"	48	
0921-20	2"	1.83"	24	
0921-25	2-1/2"	2.36"	12	
0921-30	3"	3.03"	12	
0921-40	4"	3.93"	6	

BOSHART INDUSTRIES

PREMIUM PVC BALL VALVES

Molded in Place PVC, Seat Material: EPDM, Stem Packing Material: EPDM, Ball Material: PVC, ABS Tee Handle
Slip Connection
Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)
• NSF/ANSI Standard 61 & 372 Certified (1/2" to 2" only)

Suitable for both Schedule 40 & 80 PVC pipe.

Part No.	Size	Port Size	Quantity L1	Quantity L2
0921S-05	1/2"	0.55"	100	
0921S-07	3/4"	0.79"	100	
0921S-10	1"	0.98"	100	
0921S-12	1-1/4"	1.18"	100	
0921S-15	1-1/2"	1.42"	48	
0921S-20	2"	1.83"	24	
0921S-25	2-1/2"	2.36"	12	
0921S-30	3"	3.03"	12	
0921S-40	4"	3.93"	6	

Molded in Place PVC, Seat Material: PTFE, Stem Packing Material: Viton, Ball Material: PVC, ABS Tee Handle
FPT Connection
Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)

Suitable for both Schedule 40 & 80 PVC pipe.

0923-05	1/2"	0.55"	100	
0923-07	3/4"	0.79"	100	
0923-10	1"	0.98"	100	
0923-12	1-1/4"	1.18"	100	
0923-15	1-1/2"	1.42"	48	
0923-20	2"	1.83"	24	

Molded in Place PVC, Seat Material: PTFE, Stem Packing Material: Viton, Ball Material: PVC, ABS Tee Handle
Slip Connection
Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)

Suitable for both Schedule 40 & 80 PVC pipe.

0923S-05	1/2"	0.55"	100	
0923S-07	3/4"	0.79"	100	
0923S-10	1"	0.98"	100	
0923S-12	1-1/4"	1.18"	100	
0923S-15	1-1/2"	1.42"	48	
0923S-20	2"	1.83"	24	

Single Union UPVC, Seat Material: EPDM, Stem Packing Material: EPDM, Ball Material: UPVC, ABS Tee Handle
FPT Connection
Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)
• Threads conform to ANSI/ASME B1.20.1

Suitable for both Schedule 40 & 80 PVC pipe.

0933-15	1-1/2"	1.52"	48	
0933-20	2"	1.89"	24	

Single Union UPVC, Seat Material: EPDM, Stem Packing Material: EPDM, Ball Material: UPVC, ABS Tee Handle
Slip Connection
Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)
• Slip connections conform to ASTM D2466

Suitable for both Schedule 40 & 80 PVC pipe.

BOSHART INDUSTRIES

PREMIUM PVC BALL VALVES

Part No.	Size	Port Size	Quantity L1	L2
0933S-15	1-1/2"	1.52"	48	
0933S-20	2"	1.89"	24	

True Union UPVC, Seat Material: PTFE, Stem Packing Material: EPDM, Ball Material: UPVC, ABS Tee Handle
FPT or Slip Connection
Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)
• NSF/ANSI 61 & 372 Certified
Note: Double union / double block design permits in-line maintenance without disconnecting pipe. Ends are blocked with bayonet style lock to prevent ball from being blown out. Handle is equipped with removable spanner device.

Suitable for both Schedule 40 & 80 PVC pipe. Note: Double union / double block design permits in-line maintenance without disconnecting pipe. Ends are blocked with bayonet style lock to prevent ball from being blown out. Handle is equipped with removable spanner device.

0925-05NL	1/2"	0.51"	48	
0925-07NL	3/4"	0.71"	36	
0925-10NL	1"	0.91"	24	
0925-12NL	1-1/4"	1.18"	24	
0925-15NL	1-1/2"	1.50"	24	
0925-20NL	2"	1.89"	12	
0925-25NL	2-1/2"	2.36"	6	
0925-30NL	3"	2.72"	6	
0925-40NL	4"	3.94"		

True Union UPVC, Seat Material: PTFE, Stem Packing Material: Viton, Ball Material: UPVC, ABS Tee Handle
FPT or Slip Connection
Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)
Note: Double union / double block design permits in-line maintenance without disconnecting pipe. Ends are blocked with bayonet style lock to prevent ball from being blown out. Handle is equipped with removable spanner device.

Suitable for both Schedule 40 & 80 PVC pipe. Note: Double union / double block design permits in-line maintenance without disconnecting pipe. Ends are blocked with bayonet style lock to prevent ball from being blown out. Handle is equipped with removable spanner device.

0926-05	1/2"	0.51"	48	
0926-07	3/4"	0.71"	36	
0926-10	1"	0.91"	24	
0926-12	1-1/4"	1.18"	24	
0926-15	1-1/2"	1.50"	24	
0926-20	2"	1.89"	12	
0926-25	2-1/2"	2.36"	6	
0926-30	3"	2.72"	6	
0926-40	4"	3.94"	1	

BOSHART INDUSTRIES

GAS BALL VALVES

Boshart's Gas Ball Valves have a two piece forged brass body and a blow out proof stem. Available in combinations of FPT, Flare and MPT threads. Options for a 1/8" tapping for a manometer which allows line pressure to be tested at the valve are available. FPT connections are available with a yellow or red handle.

Two Piece Brass, Seat Material: PTFE, Yellow Tee Handle
FPT Connection
Temperature Range: -4°F to 149°F (-20°C to 65°C), Maximum Pressure: 250 PSI
• CSA listed to the following standards
- ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
- ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
• UL listed to the following standards
- UL 842 (YRPV): Gas shutoff valves - 250 PSI
- UL 842 (MHKZ): Manual valves - 250 PSI
- UL 125 (YSDT): LP-Gas shutoff valves - 250 PSI

Part No.	Size	Port Size	Quantity L1	Quantity L2
0832-03	3/8"	0.39"	10	100
0832-05	1/2"	0.39"	10	100
0832-07	3/4"	0.59"	10	100
0832-10	1"	0.75"	6	60

Two Piece Brass, Seat Material: PTFE, Red Tee Handle
FPT Connection
Temperature Range: -4°F to 149°F (-20°C to 65°C), Maximum Pressure: 250 PSI
• CSA listed to the following standards
- ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
- ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
• UL listed to the following standards
- UL 842 (YRPV): Gas shutoff valves - 250 PSI
- UL 842 (MHKZ): Manual valves - 250 PSI
- UL 125 (YSDT): LP-Gas shutoff valves - 250 PSI

0832R-03	3/8"	0.39"	10	100
0832R-05	1/2"	0.39"	10	100
0832R-07	3/4"	0.59"	10	100
0832R-10	1"	0.75"	6	60

Two Piece Brass, Seat Material: PTFE, Yellow Tee Handle
FPT Connection
Temperature Range: -4°F to 149°F (-20°C to 65°C), Maximum Pressure: 250 PSI
• CSA listed to the following standards
- ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
- ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
• UL listed to the following standards
- UL 842 (YRPV): Gas shutoff valves - 250 PSI
- UL 842 (MHKZ): Manual valves - 250 PSI
- UL 125 (YSDT): LP-Gas shutoff valves - 250 PSI

0832TP-05	1/2"	0.39"	10	100
0832TP-07	3/4"	0.59"	10	100

Two Piece Brass, Seat Material: PTFE, Yellow Tee Handle
FPT x Flare Connection
Temperature Range: -4°F to 149°F (-20°C to 65°C), Maximum Pressure: 250 PSI
• CSA listed to the following standards
- ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
- ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
• UL listed to the following standards
- UL 842 (YRPV): Gas shutoff valves - 250 PSI
- UL 842 (MHKZ): Manual valves - 250 PSI
- UL 125 (YSDT): LP-Gas shutoff valves - 250 PSI

0833-0503	1/2" x 3/8"	0.39"	10	100
0833-0505	1/2"	0.39"	10	100

BOSHART INDUSTRIES

GAS BALL VALVES

Two Piece Brass, Seat Material: PTFE, Yellow Tee Handle
MPT x Flare Connection
Temperature Range: -4°F to 149°F (-20°C to 65°C), Maximum Pressure: 250 PSI
• CSA listed to the following standards
- ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
- ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
• UL listed to the following standards
- UL 842 (YRPV): Gas shutoff valves - 250 PSI
- UL 842 (MHKZ): Manual valves - 250 PSI
- UL 125 (YSDT): LP-Gas shutoff valves - 250 PSI

Part No.	Size	Port Size	Quantity L1	Quantity L2
0834-0503	1/2" x 3/8"	0.39"	10	100
0834-0505	1/2"	0.39"	10	100

Two Piece Brass, Seat Material: PTFE, Yellow Tee Handle
Flare Connection
Temperature Range: -4°F to 149°F (-20°C to 65°C), Maximum Pressure: 250 PSI
• CSA listed to the following standards
- ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
- ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
• UL listed to the following standards
- UL 842 (YRPV): Gas shutoff valves - 250 PSI
- UL 842 (MHKZ): Manual valves - 250 PSI
- UL 125 (YSDT): LP-Gas shutoff valves - 250 PSI

Part No.	Size	Port Size	Quantity L1	Quantity L2
0835-03	3/8"	0.27"	10	100
0835-05	1/2"	0.38"	10	100

Two Piece Brass, Yellow Tee Handle
Flare Connection
Temperature Range: -4°F to 149°F (-20°C to 65°C), Maximum Pressure: 250 PSI
• CSA listed to the following standards
- ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
- ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
• UL listed to the following standards
- UL 842 (YRPV): Gas shutoff valves - 250 PSI
- UL 842 (MHKZ): Manual valves - 250 PSI
- UL 125 (YSDT): LP-Gas shutoff valves - 250 PSI

Part No.	Size	Port Size	Quantity L1	Quantity L2
0835TP-03	3/8"	0.27"	10	100
0835TP-05	1/2"	0.38"	10	100

BENT NOSE GARDEN VALVES

Boshart's Bent Nose Garden Valves are designed with an angled outlet. This allows a garden hose to be attached easily without the risk of a kink being formed.

Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Graphite, Green Rubber Coated Hand Wheel Handle
FPT x GHT Connection
Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI
• NSF/ANSI Standard 372 Certified
• CSA Standard B125.1 Certified

Pb NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Quantity L1	Quantity L2
0872-07NL	3/4"	12	72
0872-10NL	1" x 3/4"	12	72

BOSHART INDUSTRIES

HOSE BIBBS / SAMPLING FAUCETS

Boshart's Hose Bibbs are available in brass, stainless steel or plastic. They come in multi-turn or 1/4 turn.

Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Tee Handle
MPT x GHT Connection
Temperature Range: Up to 248°F (120°C), Maximum Pressure: 125 PSI
• NSF/ANSI Standard 61 & 372 Certified
• 0871-05NL is 1/2" MPT or Solder

Part No.	Size	Quantity L1	Quantity L2
0871-05NL	1/2" x 3/4"	10	100
0871-07NL	3/4"	10	100

Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Tee Handle
MPT Connection
Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI
• NSF/ANSI Standard 61 & 372 Certified

Part No.	Size	Quantity L1	Quantity L2
0874-05NL	1/2"	10	100
0874-07NL	3/4"	10	100

Angled Brass, Seat Material: PTFE, Stem Packing Material: Nitrile Rubber, Tee Handle
MPT x GHT Connection
Temperature Range: Up to 248°F (120°C), Maximum Pressure: 200 PSI
• NSF/ANSI Standard 61 & 372 Certified

Part No.	Size	Quantity L1	Quantity L2
0852-05NL	1/2" x 3/4"	10	100
0852-07NL	3/4"	10	100

Angled Stainless Steel, Seat Material: PTFE, Stem Packing Material: PTFE, Tee Handle
MPT x GHT Connection
Temperature Range: Up to 248°F (120°C), Maximum Pressure: 200 PSI
• NSF/ANSI Standard 372 Certified

Part No.	Size	Quantity L1	Quantity L2
SSHB52-05	1/2" x 3/4"	10	100
SSHB52-07	3/4"	10	100

Angled Stainless Steel, Seat Material: PTFE, Stem Packing Material: PTFE, Tee Handle
MPT Connection
Temperature Range: Up to 248°F (120°C), Maximum Pressure: 200 PSI
• NSF/ANSI Standard 372 Certified

Part No.	Size	Quantity L1	Quantity L2
SSSF52-05	1/2"	10	100
SSSF52-07	3/4"	10	100

Contact your sales rep for any further information
Toll Free: 1-800-561-3164
boshart.com

BOSHART INDUSTRIES

NO-KINK HOSE BIBBS

Boshart's No-Kink Hose Bibbs are designed with an angled oulet. This allows a garden hose to be attached easily without the risk of a kink being formed.

Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Brass Plated Tee Handle
MPT x GHT Connection
Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- 0875-05NL has dual 1/2" MPT or 1/2" Copper inlet

NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Quantity L1	Quantity L2
0875-05NL	1/2" x 3/4"	10	100
0875-07NL	3/4"	10	100

Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Brass Plated Tee Handle
FPT x GHT Connection
Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified

Part No.	Size	Quantity L1	Quantity L2
0875F-05NL	1/2" x 3/4"	10	100
0875F-07NL	3/4"	10	100

Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: PTFE, Green Epoxy Coated Tee Handle
MPT x GHT Connection
Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- 0875H-05NL has dual 1/2" MPT or 1/2" Copper inlet

Part No.	Size	Quantity L1	Quantity L2
0875H-05NL	1/2" x 3/4"	12	72
0875H-07NL	3/4"	12	72

Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: PTFE, Green Epoxy Coated Tee Handle
FPT x GHT Connection
Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified

NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Quantity L1	Quantity L2
0875HF-05NL	1/2" x 3/4"	12	72
0875HF-07NL	3/4"	12	72

BRASS SILLCOCKS

Boshart's Brass Sillcocks are ideal for cold water applications.

Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Black Cast Hand Wheel Handle
FPT x GHT Connection
Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified

NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Quantity L1	Quantity L2
0873-05NL	1/2" x 3/4"	12	144
0873-07NL	3/4"	12	144

Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Black Cast Hand Wheel Handle
CxC x GHT Connection
Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified

NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Quantity L1	Quantity L2
0873C-05NL	1/2" x 3/4"	12	144

Contact your sales rep for any further information

Toll Free: 1-800-561-3164
boshart.com

BOSHART INDUSTRIES

SEDIMENT FAUCETS / BOILER DRAINS

Boshart's Sediment Faucets can be used to flush sediment build-up from pressure tanks. There are two designs, straight and angled, for when connecting a hose is required.

Straight Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Black Cast Hand Wheel Handle
MPT x GHT Connection
Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI
- NSF/ANSI 61 & 372 Certified
- CSA Standard B125.1 Certified
- 0853-05NL has dual 1/2" MPT or 1/2" Copper inlet

NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Quantity L1	Quantity L2
0853-05NL	1/2" x 3/4"	10	100
0853-07NL	3/4"	10	100

Straight Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Black Cast Hand Wheel Handle
FPT x GHT Connection
Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI
- NSF/ANSI 61 & 372 Certified
- CSA Standard B125.1 Certified

NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Quantity L1	Quantity L2
0853F-05NL	1/2" x 3/4"	10	100
0853F-07NL	3/4"	10	100

Straight Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Black Cast Hand Wheel Handle
MPT x GHT Connection
Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI
- NSF / ANSI 61 & 372 Certified
- CSA B125.1 Certified
- 0851-05 has dual 1/2" MPT or 1/2" Copper inlet

Part No.	Size	Quantity L1	Quantity L2
0851-05	1/2" x 3/4"	10	100
0851-07	3/4"	10	100

Straight Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Black Cast Hand Wheel Handle
Crimp PEX or MPT x GHT Connection
Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI
- NSF/ANSI 61 & 372 Certified
- CSA Standard B125.1 Certified

NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Quantity L1	Quantity L2
0851P-05NL	1/2" x 3/4"	10	100

Straight Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Blue Triangular Handle
MPT x GHT Connection
Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI
- NSF/ANSI 372 Certified
- CSA Standard B125.1 Certified

NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Quantity L1	Quantity L2
0845SF-05NL	1/2" x 3/4"	10	100
0845SF-07NL	3/4"	10	100

Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Blue Triangular Handle
MPT x GHT Connection
Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI
- NSF/ANSI 372 Certified
- CSA Standard B125.1 Certified

NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Quantity L1	Quantity L2
0845SFA-05NL	1/2" x 3/4"	12	144
0845SFA-07NL	3/4"	12	144

Straight Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Zinc Plated Handle
MPT x GHT Connection
Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI
- NSF/ANSI 372 Certified
- CSA Standard B125.1 Certified

NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Quantity L1	Quantity L2
0846SF-05NL	1/2" x 3/4"	10	100
0846SF-07NL	3/4"	10	100

BOSHART INDUSTRIES

STOP / STOP & WASTE VALVES

Boshart's Stop / Stop & Waste Valves are excellent for anywhere a compact, economical shut off is required. These come in two options, with a drain hole and cap and without the drain.

Stop Brass, Seat Material: Nitrile Rubber, Black Cast Hand Wheel Handle
FPT Connection
Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI
• NSF/ANSI 61 & 372 Certified
• CSA Standard B125.1 Certified

NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Quantity L1	Quantity L2
0843-05NL	1/2"	10	100
0843-07NL	3/4"	10	100

Stop Brass, Seat Material: Nitrile Rubber, Black Cast Hand Wheel Handle
CxC Connection
Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI
• NSF/ANSI 61 & 372 Certified
• CSA Standard B125.1 Certified

Part No.	Size	Quantity L1	Quantity L2
0843C-05NL	1/2"	10	100
0843C-07NL	3/4"	10	100

Stop & Waste Brass, Seat Material: Nitrile Rubber, Black Cast Hand Wheel Handle
FPT Connection
Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI
• NSF/ANSI 61 & 372 Certified
• CSA Standard B125.1 Certified

NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Quantity L1	Quantity L2
0844-05NL	1/2"	10	100
0844-07NL	3/4"	10	100

Stop & Waste Brass, Seat Material: Nitrile Rubber, Black Cast Hand Wheel Handle
CxC Connection
Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI
• NSF/ANSI 61 & 372 Certified
• CSA Standard B125.1 Certified

NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Quantity L1	Quantity L2
0844C-05NL	1/2"	10	100
0844C-07NL	3/4"	10	100

Stop & Waste Brass, Seat Material: Nitrile Rubber, Black Cast Hand Wheel Handle
Comp Connection
Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI
• NSF/ANSI 61 & 372 Certified
• CSA Standard B125.1 Certified
Note: Can be used to make connections between Copper, Brass, Aluminum, Plastic, CPVC & Pex tubing. Not recommended for use with steel tubing, designed for use with tube manufactured to CTS-OD tubing.

Part No.	Size	Quantity L1	Quantity L2
0844CPR-05NL	1/2"	10	100
0844CPR-07NL	3/4"	10	100

CHROME PLATED NON-FREEZE LAWN FAUCETS

Boshart's Non-Freeze Lawn Faucets get installed through a wall and allow the water to drain back out of the valve so it won't freeze in the winter. This prevents winterizing and allows outdoor access to water year round.

Without Self Draining Vacuum Breaker Seat Material: Nitrile Rubber, Black Cast Hand Wheel Handle
MPT or Copper x GHT Connection
Temperature Range: Up to 120°F (49°C), Maximum Pressure: 125 PSI
• NSF/ANSI Standard 61 & 372 Certified
• CSA Standard B125.1 Certified

Part No.	Size	Length	Quantity L1	Quantity L2
0861-080NL	1/2" x 3/4"	8"	2	40
0861-100NL	1/2" x 3/4"	10"	2	40
0861-120NL	1/2" x 3/4"	12"	2	40
0861-140NL	1/2" x 3/4"	14"	2	40

Contact your sales rep for any further information

BOSHART INDUSTRIES

CHROME PLATED NON-FREEZE LAWN FAUCETS

With Self Draining Vacuum Breaker Seat Material: Viton, Black Cast Hand Wheel Handle
MPT or Copper x GHT Connection
Temperature Range: Up to 140°F (60°C), Maximum Pressure: 125 PSI
- 1/4 turn
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- ASSE Standard 1019 Certified

Part No.	Size	Length	Quantity L1	Quantity L2
08QTWH05-040NL	1/2" x 3/4"	4"	2	40
08QTWH05-060NL	1/2" x 3/4"	6"	2	40
08QTWH05-080NL	1/2" x 3/4"	8"	2	40
08QTWH05-100NL	1/2" x 3/4"	10"	2	40
08QTWH05-120NL	1/2" x 3/4"	12"	2	40
08QTWH05-140NL	1/2" x 3/4"	14"	2	40

With Self Draining Vacuum Breaker Seat Material: Viton, Black Cast Hand Wheel Handle
PEX x GHT Connection
Temperature Range: Up to 140°F (60°C), Maximum Pressure: 125 PSI
- 1/4 turn
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- ASSE Standard 1019 Certified

08QTWH05P-080NL	1/2" x 3/4"	8"	2	40
08QTWH05P-100NL	1/2" x 3/4"	10"	2	40
08QTWH05P-120NL	1/2" x 3/4"	12"	2	40
08QTWH05P-140NL	1/2" x 3/4"	14"	2	40

With Self Draining Vacuum Breaker Seat Material: Viton, Black Cast Hand Wheel Handle
MPT or FPT x GHT Connection
Temperature Range: Up to 140°F (60°C), Maximum Pressure: 125 PSI
- 1/4 turn
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- ASSE Standard 1019 Certified

Pb NO LEAD <0.25% Pb by weighted avg.

08QTWH07-100NL	3/4" or 1/2" x 3/4"	10"	2	40
08QTWH07-120NL	3/4" or 1/2" x 3/4"	12"	2	40
08QTWH07-140NL	3/4" or 1/2" x 3/4"	14"	2	40

With Self Draining Vacuum Breaker Seat Material: Nitrile Rubber,
Black Cast Hand Wheel Handle
MPT or Copper x GHT Connection
Temperature Range: Up to 140°F (60°C), Maximum Pressure: 125 PSI

0865-040	1/2" x 3/4"	4"	2	40
0865-060	1/2" x 3/4"	6"	2	40
0865-080	1/2" x 3/4"	8"	2	40
0865-100	1/2" x 3/4"	10"	2	40
0865-120	1/2" x 3/4"	12"	2	40
0865-140	1/2" x 3/4"	14"	2	40
0865-160	1/2" x 3/4"	16"	2	40
0865-180	1/2" x 3/4"	18"	2	40
0865-200	1/2" x 3/4"	20"	2	40
0865-220	1/2" x 3/4"	22"	2	40
0865-240	1/2" x 3/4"	24"	2	40

With Self Draining Vacuum Breaker, Seat Material: Nitrile Rubber,
Black Cast Hand Wheel Handle
MPT or Copper x GHT Connection
Temperature Range: Up to 140°F (60°C), Maximum Pressure: 125 PSI
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- ASSE Standard 1019 Certified

Pb NO LEAD <0.25% Pb by weighted avg.

0865-040NL	1/2" x 3/4"	4"	2	40
0865-060NL	1/2" x 3/4"	6"	2	40
0865-080NL	1/2" x 3/4"	8"	2	40
0865-100NL	1/2" x 3/4"	10"	2	40
0865-120NL	1/2" x 3/4"	12"	2	40
0865-140NL	1/2" x 3/4"	14"	2	40

BOSHART INDUSTRIES

CHROME PLATED NON-FREEZE LAWN FAUCETS

With Self Draining Vacuum Breaker Seat Material: Nitrile Rubber,
Black Cast Hand Wheel Handle
PEX x GHT Connection
Temperature Range: Up to 140°F (60°C), Maximum Pressure: 125 PSI

Part No.	Size	Length	Quantity L1	Quantity L2
0865P-040	1/2" x 3/4"	4"	2	40
0865P-060	1/2" x 3/4"	6"	2	40
0865P-080	1/2" x 3/4"	8"	2	40
0865P-100	1/2" x 3/4"	10"	2	40
0865P-120	1/2" x 3/4"	12"	2	40
0865P-140	1/2" x 3/4"	14"	2	40

With Self Draining Vacuum Breaker Seat Material: Nitrile Rubber,
Black Cast Hand Wheel Handle
PEX x GHT Connection
Temperature Range: Up to 140°F (60°C), Maximum Pressure: 125 PSI
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- ASSE Standard 1019 Certified

NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Length	Quantity L1	Quantity L2
0865P-040NL	1/2" x 3/4"	4"	2	40
0865P-060NL	1/2" x 3/4"	6"	2	40
0865P-080NL	1/2" x 3/4"	8"	2	40
0865P-100NL	1/2" x 3/4"	10"	2	40
0865P-120NL	1/2" x 3/4"	12"	2	40
0865P-140NL	1/2" x 3/4"	14"	2	40

VACUUM BREAKERS

Vacuum Breakers install easily to any 3/4" hose faucet to provide back-siphonage protection. They feature a break-away set screw to make a permanent vandal-proof installation.
- CSA Standard B64.2 Certified
- ASSE Standard 1011 Certified

Manual Draining Brass,
FGHT x MGHT Connection
Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI

Part No.	Size	Quantity L1	Quantity L2
0881-07	3/4"	10	200

Manual Draining Brass,
FGHT x MGHT Connection
Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI

NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Quantity L1	Quantity L2
0881-07NL	3/4"	10	200

Auto Draining Brass,
FGHT x MGHT Connection
Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI
Self-drains when all hose attachments are removed, protecting the valve or faucet from freezing in colder weather.

NO LEAD <0.25% Pb by weighted avg.

Part No.	Size	Quantity L1	Quantity L2
0882-07NL	3/4"	10	200

BOSHART INDUSTRIES

CHROME PLATED SUPPLY STOPS

Supply stops are an excellent low pressure shut off valve generally found at the appliance. They come in different connections and configurations to meet all needs.

Seat Material: PTFE, Stem Packing Material: EPDM,
Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI

- 1/4 Turn
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- Connections conform to the following standards
  - Threads ANSI/ASME B1.20.1
  - CxC ANSI B16.18
  - CPVC ASTM D2846
  - PEX ASTM F1807
  - Push Fit ASSE 1061
  - Compression SAE J512
  - Cold Expansion ASTM F1960

Part No.	Size	Connection Type	Quantity L1	Quantity L2
Angled				
08SVA-03FNL	3/8"	FPT x Comp	20	240
08SVA-05CEPNL	1/2" x 3/8"	Cold Expansion x Comp	20	240
08SVA-05CNL	1/2" x 3/8"	Copper x Comp	20	240
08SVA-05FNL	1/2" x 3/8"	FPT x Comp	20	240
08SVA-05PF02CPNL	1/2" x 1/4"	Push Fit x Comp	20	240
08SVA-05PFNL	1/2" x 3/8"	Push Fit x Comp	20	240
08SVA-05PNL	1/2" x 3/8"	PEX x Comp	20	240
08SVA-05VNL	1/2" x 3/8"	CPVC x Comp	20	240
08SVA-58CPNL	5/8" x 3/8"	Comp	20	240

Dual Outlet				
08SVD-05F03CPNL	1/2" x 3/8" x 3/8"	FPT x Comp	20	240
08SVD-58CP03CPNL	5/8" x 3/8" x 3/8"	Comp	20	240

Dual Outlet Dual Shut-Off				
08SVDD-05F03CPNL	1/2" x 3/8"	FPT x Comp	10	120
08SVDD-58CP03CPNL	5/8" x 3/8"	Comp	10	120

Straight				
08SVS-03FNL	3/8"	FPT x Comp	20	240
08SVS-05CEPNL	1/2" x 3/8"	Cold Expansion x Comp	20	240
08SVS-05CNL	1/2" x 3/8"	Copper x Comp	20	240
08SVS-05FNL	1/2" x 3/8"	FPT x Comp	20	240
08SVS-05P05PNL	1/2"	PEX	20	240
08SVS-05PFNL	1/2" x 3/8"	Push Fit x Comp	20	240
08SVS-05PNL	1/2" x 3/8"	PEX x Comp	20	240
08SVS-05VNL	1/2" x 3/8"	CPVC x Comp	20	240
08SVS-58CPNL	5/8" x 3/8"	Comp	20	240
08SVS-RFNL	3/8"	Swivel Nut x CPR	20	240

Tee				
08SVT-05PF02CPNL	1/2" x 1/4"	Push Fit x Comp	10	120
08SVT-05PFNL	1/2" x 3/8"	Push Fit x Comp	10	120

NO LEAD <0.25% Pb by weighted avg.

BOSHART INDUSTRIES

ICE MAKER CHROME PLATED SUPPLY STOPS

Supply stops are an excellent low pressure shut off valve generally found at appliances. They come in different connections and configurations to meet all needs.

Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI

- 1/4 Turn
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- Connections conform to the following standards
  - Threads ANSI/ASME B1.20.1
  - CxC ANSI B16.18
  - Crimp PEX08sva end conform to ASTM F1807
  - Compression SAE J512

Part No.	Size	Quantity L1	Quantity L2
Ice Maker Copper x Comp			
08SVA-05C02CPNL	1/2" x 1/4"	20	240
Ice Maker FPT x Comp			
08SVA-05F02CPNL	1/2" x 1/4"	20	240

Part No.	Size	Quantity L1	Quantity L2
Ice Maker Crimp PEX x Compression			
08SVA-05P02CPNL	1/2" x 1/4"	20	240
Ice Maker Comp			
08SVA-58CP02CPNL	5/8" x 1/4"	20	240

WASHING MACHINE CHROME PLATED SUPPLY STOPS

Supply stops are an excellent low pressure shut off valve generally found at appliances. They come in different connections and configurations to meet all needs. These washing machine valves have color coded handles for hot and cold water supplies.

Pb NO LEAD <0.25% Pb by weighted avg.

Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI

- 1/4 Turn
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- Connections conform to the following standards
  - Threads ANSI/ASME B1.20.1
  - CxC ANSI B16.18
  - Crimp PEX end conforms to ASTM F1807
  - Compression SAE J512

Part No.	Size	Quantity L1	Quantity L2
Angled Blue Plastic Handle MPT or Comp x GHT			
08SVAWMB-05MNL	1/2" x 3/4"	20	240
Angled Blue Plastic Handle Crimp PEX x GHT			
08SVAWMB-05PNL	1/2" x 3/4"	20	240
Angled Blue Plastic Handle CPR x GHT			
08SVAWMB-58CPNL	5/8" x 3/4"	20	240

Part No.	Size	Quantity L1	Quantity L2
Angled Red Plastic Handle MPT or Comp x GHT			
08SVAWMR-05MNL	1/2" x 3/4"	20	240
Angled Red Plastic Handle Crimp PEX x GHT			
08SVAWMR-05PNL	1/2" x 3/4"	20	240
Angled Red Plastic Handle CPR x GHT			
08SVAWMR-58CPNL	5/8" x 3/4"	20	240