


GCC SERIES GALVANIZED COMPRESSION (DRESSER) COUPLING

SPECIFICATION:


- Materials conform to ASTM A197
- Max Pressure Rating: 150 PSI
- Max Temperature Rating: 140°F (60°C)
- Gasket Material: Nitrile
- Compression Ring: Galvanized Carbon Steel

CERTIFICATION:

- NSF/ANSI Standard 372 Certified



MATERIAL LIST	
Name	Percent of Composition
Cupola Malleable Iron (ASTM A197)	
Iron (FE)	≥94.0
Carbon (C)	2.9-3.1
Silicone (Si)	1.35-1.6
Manganese (Mn)	0.4-0.6
Phosphorus (P)	<0.1
Sulfur (S)	<0.2
Galvanized Zinc Coating (ASTM A153)	
Zinc (Zn)	≥98.0
Iron (Fe)	≤0.4
Pb	≤0.03

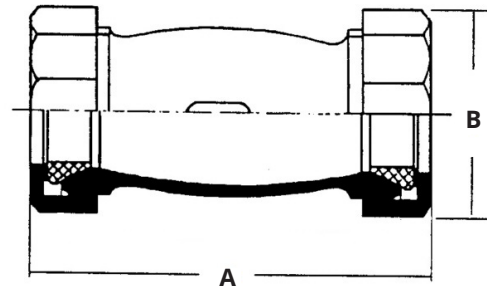

DIMENSIONS						
Part No.	Size	A		B		Weight grams
	IPS	inches	mm	inches	mm	
GCC-05	1/2"	3.62	92.00	1.42	36.00	183
GCC-07	3/4"	3.62	92.00	1.69	43.00	283
GCC-10	1"	3.94	100.00	2.13	54.00	479
GCC-12	1-1/4"	4.09	104.00	2.40	61.00	546
GCC-15	1-1/2"	4.25	108.00	2.68	68.00	604
GCC-20	2"	4.37	111.00	3.19	81.00	893



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com