


BPF-TNL SERIES NO LEAD BRASS PUSH FIT FITTING TEE

FEATURES:

- Designed for use on Copper, CPVC and PEX piping in plumbing and hydronic heating systems.
- For CTS (Copper Tube Size) O.D. Sizes - 3/8" (0.50") 1/2" (0.625") 3/4" (0.875") 1" (1.125")
- Approved for use in both underground and behind the wall applications.
- Eliminates the need for soldering, crimping or solvent welding.
- Ideal for wet, hazardous and dry repairs in hard to access locations or where open flame could be a fire hazard for soldering.
- Removable and Reusable, plastic disconnect tool is used to release the gripper ring, making for easy disconnection.
- Each fitting comes complete with integral Polysulfone tube support, required for use with PEX piping.




SPECIFICATION:

- Max Pressure Rating: 200 PSI
- Max Temperature Rating: 200°F (93°C)
- Forged DZR (Dezincification Resistant) No Lead Brass Body

CERTIFICATION:

- UPC (Uniform Plumbing Code) Standard ASSE 1061 Certified
- NSF/ANSI Standard 14, 61 & 372 Certified

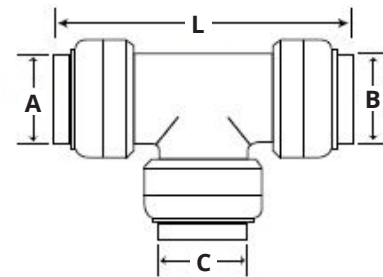

MATERIAL LIST	
Part Name	Material
Body	No Lead Brass
Grip Ring	Stainless Steel
Release Ring	POM
Retaining Ring	POM
Spacer	Nylon
O-Ring	EPDM
Tube Support	Polysulfone

DIMENSIONS										
Part No.	Size	A		C		B		L		Weight grams
		inches	mm	inches	mm	inches	mm	inches	mm	
BPF-T03NL	3/8"	0.50	12.70	0.50	12.70	0.50	12.70	2.50	63.50	90
BPF-T05NL	1/2"	0.63	15.88	0.63	15.88	0.63	15.88	2.93	74.42	120
BPF-T070505NL	3/4" x 1/2" x 1/2"	0.88	22.23	0.63	15.88	0.63	15.88	2.92	74.17	150
BPF-T070507NL	3/4" x 1/2" x 3/4"	0.88	22.23	0.63	15.88	0.88	22.23	3.04	77.22	150
BPF-T070705NL	3/4" x 3/4" x 1/2"	0.88	22.23	0.88	22.23	0.63	15.88	3.16	80.26	160
BPF-T07NL	3/4"	0.88	22.23	0.88	22.23	0.88	22.23	3.16	80.26	170
BPF-T101007NL	1" x 1" x 3/4"	1.13	28.58	1.13	28.58	0.88	22.23	3.76	95.50	240
BPF-T10NL	1"	1.13	28.58	1.13	28.58	1.13	28.58	3.76	95.50	260



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com