



0846SF-NL SERIES NO LEAD BRASS SEDIMENT FAUCETS - O-RING DESIGN

SPECIFICATION:


- Inlet threads conform to ANSI/ASME B1.20.1
- Outlet thread is 3/4" GHT
- Max Pressure Rating: 125 PSI
- Max Temperature Rating: 160°F (71°C)
- With O-ring design, the seal is below the threads and never exposed to water. Traditional packing style valves are constantly submerged in water and become corroded quicker in aggressive water conditions
- To prevent damage to NBR O-rings, stem must be removed before soldering

CERTIFICATION:

- NSF/ANSI Standard 372 Certified
- CSA Standard B125.1 Certified

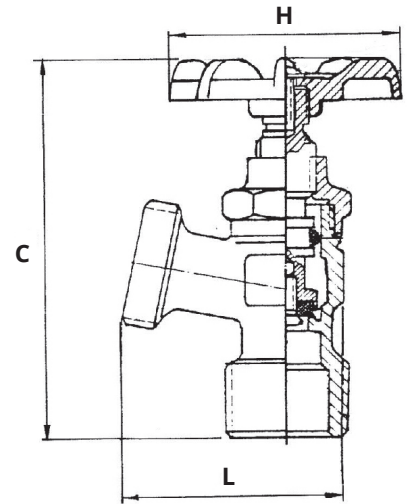

| MATERIAL LIST | |
|---------------|-----------------------|
| Part Name | Material |
| Handle Bolt | Steel |
| Handle | Zinc Plated Cast Iron |
| Stem | No Lead Brass |
| Bonnet | No Lead Brass |
| O-Ring | Rubber NBR |
| Seat Packing | Rubber NBR |
| Seat Screw | No Lead Brass |
| Body | No Lead Brass |

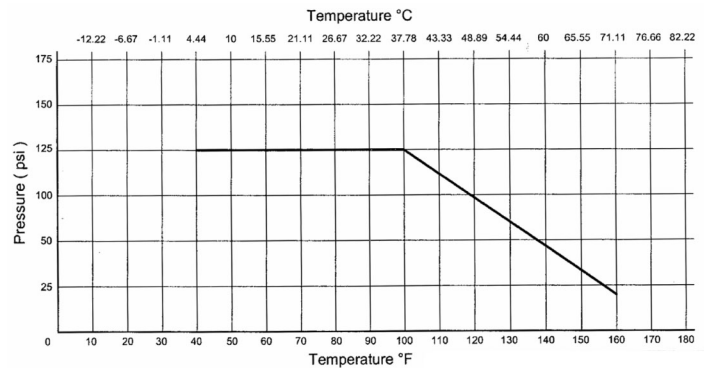

| DIMENSIONS | | | | | | | | |
|-------------|-------------|--------|-------|--------|-------|--------|-------|--------------|
| Part No. | Description | H | | C | | L | | Weight grams |
| | | inches | mm | inches | mm | inches | mm | |
| 0846SF-05NL | 1/2" MPT | 1.91 | 48.50 | 3.00 | 76.20 | 1.84 | 46.60 | 178 |
| 0846SF-07NL | 3/4" MPT | 1.91 | 48.50 | 3.00 | 76.20 | 1.84 | 46.60 | 191 |



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com