


# BPF-W(H)C SERIES NO LEAD BRASS PUSH FIT FITTING WATER (HEATER) CONNECTOR

## FEATURES:

- Designed for use on Copper, CPVC and PEX piping in plumbing and hydronic heating systems.
- For CTS (Copper Tube Size) O.D. Sizes - 3/8" (0.50") 1/2" (0.625") 3/4" (0.875") 1" (1.125")
- Approved for use in both underground and behind the wall applications.
- Eliminates the need for soldering, crimping or solvent welding.
- Ideal for wet, hazardous and dry repairs in hard to access locations or where open flame could be a fire hazard for soldering.
- Removable and Reusable, plastic disconnect tool is used to release the gripper ring, making for easy disconnection.
- Each fitting comes complete with integral Polysulfone tube support, required for use with PEX piping.





## SPECIFICATION:

- Max Pressure Rating: 200 PSI
- Max Temperature Rating: 200°F (93°C)
- Forged DZR (Dezincification Resistant) No Lead Brass Body

## CERTIFICATION:

- UPC (Uniform Plumbing Code) Standard ASSE 1061 Certified
- NSF/ANSI Standard 14, 61 & 372 Certified

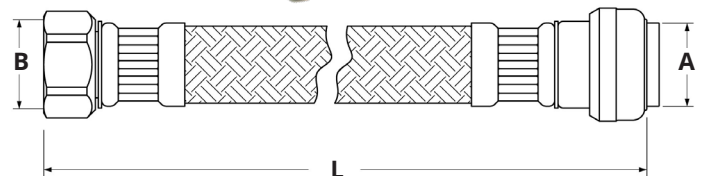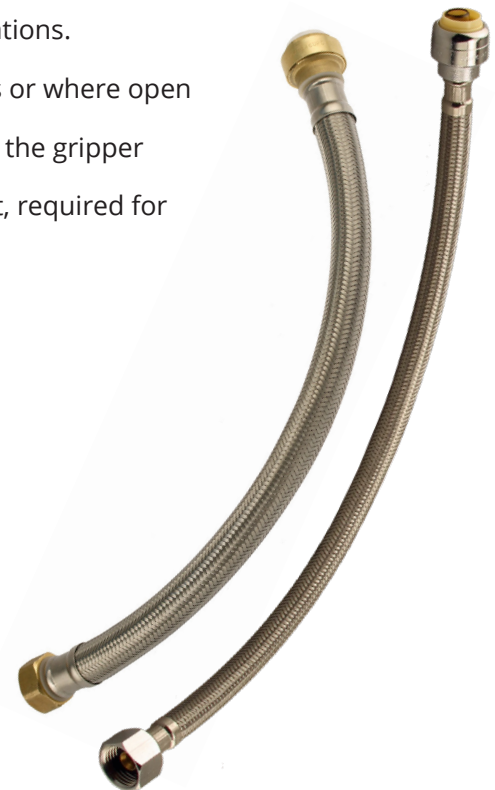

MATERIAL LIST	
Name	Material
Connections	No Lead Brass
Grip Ring	Stainless Steel
Release Ring	POM
Retaining Ring	POM
Spacer	Nylon
O-Ring	EPDM
Tube Support	Polysulfone
Hose	Stainless Steel Braided PVC

DIMENSIONS								
Part No.	Size	A		B		L		Weight grams
		inches	mm	inches	mm	inches	mm	
BPF-WC05-18	1/2"	0.63	15.88	0.63	15.88	18.00	457.20	260
BPF-WHC0507-18	1/2" x 3/4"	0.63	15.88	0.88	22.23	18.00	457.20	280
BPF-WHC07-18	3/4"	0.88	22.23	0.88	22.23	18.00	457.20	300



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0  
Tel: 800-561-3164

[boshart.com](http://boshart.com) ♦ [blog.boshart.com](http://blog.boshart.com)