


RELIEF & FLOAT VALVES AIR VOLUME & FLOW CONTROLS

Variety of products to
protect systems from
pressure build up and
ensure longevity

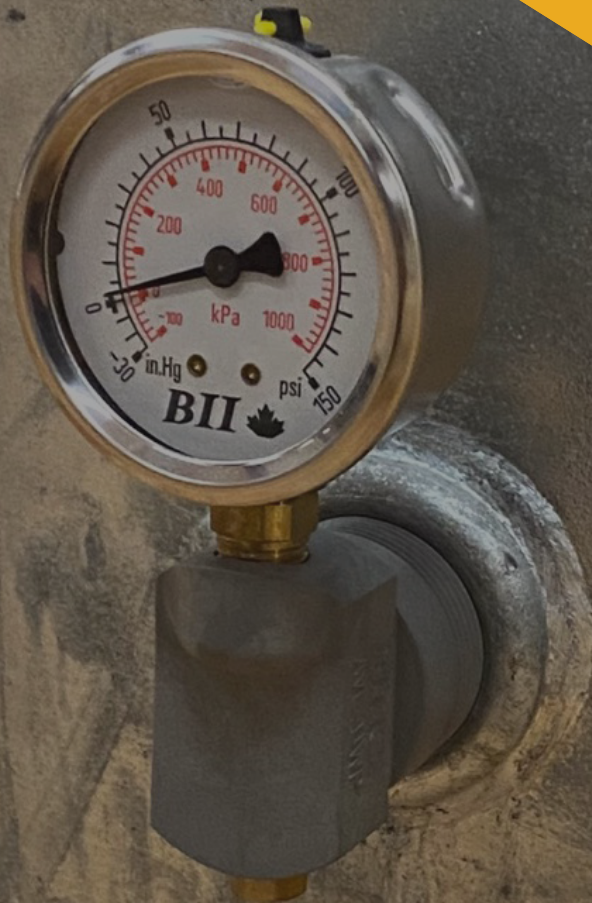

BOSHART
INDUSTRIES

INDEX

Product Line	Page
Relief Valves	1
Snifter & Tank Valves	2
Bleeder Orifices	2
Float Valves	3
Float Plug Adapters	3
Float Rods	4
Floats	4
Jet Pump Air Control	5
Non-Repairable Air Volume Controls	6
Repairable Air Volume Controls	6
Well Air Volume Controls	7
Flow Controls	8

RELIEF VALVES

Boshart's relief valves are recommended for all cold water system installations to protect against damage to piping and pressure tanks. Field adjustments are not recommended for these relief valves. Any changes made to the pre-set pressure is entirely at the risk of the person(s) / company who make the adjustment. Relief valves must be installed so that they drain to a floor drain, sump or other safe location with an air break. If an outlet pipe is used then it must be at least the same diameter as the relief valve outlet.

Spring Material: Stainless Steel



Part No.	Size	Inlet Connection	Outlet Connection	Factory Pre-Set	Quantity L1 L2	List Price -A
List Price Effective: May 27, 2022						



Brass, Temperature Range: Up to 140°F (60°C), Accuracy: +/- 15%

• NSF/ANSI Standard 372 Certified

RVNB05-075NL	1/2"	MPT	FPT	75 PSI	10 100	\$ 16.70
RVNB07-075NL	3/4" x 1/2"	MPT	FPT	75 PSI	10 100	\$ 18.04



Brass, Temperature Range: Up to 140°F (60°C), Accuracy: +/- 15%

• NSF/ANSI Standard 372 Certified

RVNB05-100NL	1/2"	MPT	FPT	100 PSI	10 100	\$ 16.70
RVNB07-100NL	3/4" x 1/2"	MPT	FPT	100 PSI	10 100	\$ 18.04



Cast Brass, Temperature Range: Up to 140°F (60°C), Accuracy: +/- 15%

• NSF/ANSI Standard 372 Certified


RVHD05NL	1/2"	MPT	FPT	75 PSI	50	\$ 145.89
RVHD07NL	3/4"	MPT	FPT	75 PSI	25	\$ 165.03
RVHD10NL	1" x 3/4"	MPT	FPT	75 PSI	20	\$ 275.61



Cast Brass, Temperature Range: Up to 140°F (60°C), Accuracy: +/- 15%

• NSF/ANSI Standard 372 Certified


RVHD12NL	1-1/4"	MPT	FPT	65 PSI	10	\$ 467.35
RVHD15NL	1-1/2"	FPT	FPT	65 PSI		\$ 1,372.59
RVHD20NL	2"	FPT	FPT	65 PSI		\$ 1,403.79



304 Stainless Steel, Accuracy: +/- 15%

• NSF/ANSI Standard 372 Certified

SSRVN05-075	1/2"	MPT	FPT	75 PSI	10 100	\$ 26.29
SSRVN07-075	3/4" x 1/2"	MPT	FPT	75 PSI	10 100	\$ 28.20



304 Stainless Steel, Accuracy: +/- 15%

• NSF/ANSI Standard 372 Certified

SSRVN05-100	1/2"	MPT	FPT	100 PSI	10 100	\$ 26.29
SSRVN07-100	3/4" x 1/2"	MPT	FPT	100 PSI	10 100	\$ 28.20



PVC, Accuracy: +/- 15%

• Adjustable to 150 PSI

PVCRVN05-75150	1/2"	MPT	FPT	75 PSI	20 120	\$ 12.99
----------------	------	-----	-----	--------	--------	----------

Contact your sales rep for any further information

Toll Free: 1-800-561-3164
boshart.com

SNIFTER & TANK VALVES

These valves allow air into a system to prevent a vacuum.

- NSF/ANSI Standard 372 Certified



Part No.	Size	Design	Quantity List		
			L1	L2	Price -A

List Price Effective: May 27, 2022



MPT, Temperature Range: -10°F to 165°F (-23°C to 73.9°C), Opening Pressure: 3 PSI, Pressure Range: 15-150 PSI					
SV-0-NCS	1/8"	Springless	10	100	\$ 5.57
SV-0-SC-VC	1/8"	Light Spring	10	100	\$ 5.10
SV-0NL	1/8"	Light Spring - Soft Core	10	100	\$ 4.28
SV-1-NCS	1/4"	Springless	10	100	\$ 6.64
SV-1-SC-VC	1/4"	Light Spring - Soft Core	10	100	\$ 6.07



MPT, Temperature Range: -40°F to 225°F (-40°C to 107°C), Opening Pressure: 60 PSI, Pressure Range: 0-200 PSI					
SV-1NL	1/4"	Standard	10	100	\$ 5.16

SNIFTER VALVE CAPS

These caps are for snifter valves.

Part No.	Description	Quantity List		
		L1	L2	Price -A

List Price Effective: April 15, 2022



SV-CAP	Black flexible plastic cap - has no sealing unit	10	100	\$ 0.18
SV-CAP-M	Chrome plated steel cap with rubber seal & valve core driver feature	10	100	\$ 1.36

BLEEDER ORIFICES

Bleeder orifices allow for water to be easily drained from submersible pump applications.



Part No.	Size	Quantity List		
		L1	L2	Price - A

List Price Effective: May 27, 2022

Brass, MPT

Rapid opening and closing, complete closure preventing loss of pumping volume.



BOB07NL	3/4"	48	384	\$ 15.24
---------	------	----	-----	----------

Part No.	Size	Quantity List		
		L1	L2	Price - A

List Price Effective: May 27, 2022

Rubber, MPT

Fast bleed through its large opening.



BOR10	1"	40	600	\$ 4.25
-------	----	----	-----	---------

Contact your sales rep for any further information

Toll Free: 1-800-561-3164
boshart.com

FLOAT VALVES

The most common use of a float valve is to control the filling of livestock water tanks and water tower cooling tanks as well as many other automatic tank filling applications.



Part No.	Inlet Size	Inlet Connection	Outlet Size	Outlet Connection	Rod Connection	Quantity List		
						L1	L2	Price -A

List Price Effective: May 27, 2022



Brass, Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI

SMT connection is straight male thread with a gasket and nut

• NSF/ANSI Standard 372 Certified

28-BFV-03NL	3/8"	MPT	3/8"	MPT	1/4" - 20 SAE	10	100	\$ 30.60
28-BFV-05NL	1/2"	MPT	1/2"	MPT	1/4" - 20 SAE	10	100	\$ 29.98
28-BFV-07NL	3/4"	MPT	3/4"	MPT	1/4" - 20 SAE	10	80	\$ 34.59
28-BFV-10NL	1"	MPT	1"	MPT	1/4" - 20 SAE	10	40	\$ 53.91
28-BFV-12NL	1-1/4"	FPT		Faucet	3/8" - 16 SAE	20		\$ 137.40
28-BFV-15NL	1-1/2"	FPT		Faucet	3/8" - 16 SAE	20		\$ 131.01
28-BFV-20NL	2"	FPT		Faucet	3/8" - 16 SAE	20		\$ 145.54
28-BHFV-05NL	1/2" or 3/8"	SMT or FPT	1/2"	MPT	1/4" - 20 SAE	10	100	\$ 38.41
28-BHFV-07NL	3/4" or 1/2"	SMT or FPT	3/4"	MPT	1/4" - 20 SAE	10	80	\$ 43.70



PVC, Maximum Pressure: 100 PSI

28-PFV-05	1/2"	MPT	1/2"	MPT	1/4" - 20 SAE	24	192	\$ 12.76
28-PFV-07	3/4"	MPT	3/4"	MPT	1/4" - 20 SAE	12	144	\$ 14.41
28-PFV-10	1"	MPT	1"	MPT	1/4" - 20 SAE	10	80	\$ 24.65
28-PFV-12	1-1/4"	MPT	1-1/4"	MPT	3/8" - 16 SAE	28		\$ 78.07
28-PFV-15	1-1/2"	MPT	1-1/2"	MPT	3/8" - 16 SAE	40		\$ 69.73

FLOAT VALVE PARTS

These are replacement parts for float valves.

Part No.	Description	Quantity List		
		L1	L2	Price -A

List Price Effective: May 27, 2022



Lever Assembly

28-BFVP-LA0310	For 3/8" to 1" float valve	100		\$ 23.37
28-BFVP-LA1220	For 1-1/4" to 2" float valve	50		\$ 25.39



Plunger Assembly

28-BFVP-PA0305	For 3/8" to 1/2" float valve	100		\$ 10.38
28-BFVP-PA07	For 3/4" float valve	60		\$ 16.67
28-BFVP-PA10	For 1" float valve	300		\$ 21.81
28-BFVP-PA1220	For 1-1/4" to 2" float valve	20		\$ 42.14



Replacement Seal Kit

28-BFVP-SK0305	For 3/8" to 1/2" float valve	50		\$ 0.70
28-BFVP-SK07	For 3/4" float valve	100		\$ 1.05
28-BFVP-SK10	For 1" float valve	100		\$ 1.22
28-BFVP-SK1220	For 1-1/4" to 2" float valve	100		\$ 1.31

FLOAT PLUG ADAPTERS

These float plug adapters are used to connect two different types of threads together or where the float rod is a different connection than the float valve requires.

Part No.	Size	Connection Type	Description	Quantity List		
				L1	L2	Price -A

List Price Effective: May 27, 2022



Brass

28-BFVA-R434-0	1/4" x 3/8"	Female 20 SAE x MPT	Connects 3/8" thru 1" valve to 8" float			\$ 20.29
28-BFVA-R434-11	3/8"	Female 16 SAE x MPT	Connects 1-1/4" thru 2" valve to 8" float			\$ 20.70
28-BFVA-R435-5	3/8" x 1/4"	Female 20 SAE x Male 16 SAE	Connects 1-1/4" thru 2" valve to 6" or smaller float			\$ 51.25

Contact your sales rep for any further information

Toll Free: 1-800-561-3164
boshart.com

FLOAT RODS

Float rods are used for connecting the float to the float valve.



Part No.	Size	Thread	Length	Quantity		List Price -A
				L1	L2	

List Price Effective: May 27, 2022



Stainless Steel,

Use to connect 3/8" thru 1" float valves with float balls up to and including 6" diameter.

28-BFVRSS-045	1/4"	Male 20 SAE	4-1/2"	500		\$ 3.45
28-BFVRSS-06	1/4"	Male 20 SAE	6"	500		\$ 3.97
28-BFVRSS-08	1/4"	Male 20 SAE	8"	400		\$ 4.36
28-BFVRSS-10	1/4"	Male 20 SAE	10"	300		\$ 4.88
28-BFVRSS-12	1/4"	Male 20 SAE	12"	200		\$ 5.47



Stainless Steel,

Use to connect 3/8" thru 1" float valves with 8" or larger float balls, or 1-1/4" thru 2" float valves with float balls up to and including 6" diameter.

28-BFVRSS3814-10	3/8" x 1/4"	Male 16 SAE x Male 20 SAE	10"	100		\$ 14.54
28-BFVRSS3814-12	3/8" x 1/4"	Male 16 SAE x Male 20 SAE	12"	100		\$ 10.48
28-BFVRSS3814-14	3/8" x 1/4"	Male 16 SAE x Male 20 SAE	14"	100		\$ 11.09
28-BFVRSS3814-16	3/8" x 1/4"	Male 16 SAE x Male 20 SAE	16"	100		\$ 18.66



Stainless Steel,

Use to connect 1-1/4" thru 2" float valves with 8" diameter and larger float balls.

28-BFVRSS38-10	3/8"	Male 16 SAE	10"	100		\$ 8.35
28-BFVRSS38-12	3/8"	Male 16 SAE	12"	100		\$ 10.20
28-BFVRSS38-14	3/8"	Male 16 SAE	14"	100		\$ 10.78
28-BFVRSS38-16	3/8"	Male 16 SAE	16"	100		\$ 12.01

FLOATS

It is not recommended to use less than an 8" diameter float with 1-1/4" to 2" valves. Due to a lack of buoyancy - 6" & smaller floats can be used where inlet pressure is very low.

Part No.	Float Diameter	Size	Thread	Bouyancy Lb/CU.FT	Quantity		List Price - A
					L1	L2	

List Price Effective: May 27, 2022



Copper,

• For open tank service only

28-BFVF-C3	3"	1/4"	Female 20 SAE	0.34			\$ 92.09
28-BFVF-C4	4"	1/4"	Female 20 SAE	0.80			\$ 67.38
28-BFVF-C5	5"	1/4"	Female 20 SAE	1.73			\$ 93.44
28-BFVF-C6	6"	1/4"	Female 20 SAE	3.26			\$ 117.78
28-BFVF-C8	8"	3/8"	Female 16 SAE	8.03			\$ 469.40



Polypropylene, Temperature Range: Up to 175°F (79°C),

• NSF/ANSI Standard 372 Certified

• For open tank service only

• Corrosion resistant

• Float rod connection is not factory threaded, the smooth hole is designed for easy self-tapping by threading the metal float rod into the blind hole

28-BFVF-P5	5"	1/4"	Female 20 SAE	1.20			\$ 11.93
28-BFVF-P6	6"	1/4"	Female 20 SAE	3.40			\$ 39.05
28-BFVF-P8	8"	1/4"	Female 20 SAE	8.40			\$ 56.45



Contact your sales rep for any further information

Toll Free: 1-800-561-3164
boshart.com

FLOATS

Part No.	Float Diameter	Size	Thread	Bouyancy Lb/CU.FT	Quantity		List Price - A
					L1	L2	

List Price Effective: May 27, 2022



Polyethylene, Temperature Range: Up to 150°F (66°C),

- Excellent corrosive resistance, good impact & abrasive resistance
- 4.5" to 6": Float rod connection is not factory threaded, the smooth hole is designed for easy self-tapping by threading the metal float rod into the blind hole
- 8" to 10": Floats have a threaded brass insert rod connection
- Not to be used in applications where they are fully submersed



28-BFVF-PL10	10"	3/8"	Female 16 SAE		1	30	\$ 30.10
28-BFVF-PL4.5	5"	1/4"	Female 20 SAE		400		\$ 2.33
28-BFVF-PL5	5"	1/4"	Female 20 SAE		200		\$ 2.60
28-BFVF-PL6	6"	1/4"	Female 20 SAE		100		\$ 5.60
28-BFVF-PL8	8"	3/8"	Female 16 SAE		50		\$ 19.44



304 Stainless Steel,

- Suitable for use in corrosive fluids where high pressure or extreme temperature may exist



28-BFVF-S3	3"	1/4"	Female 20 SAE	0.21			\$ 94.29
28-BFVF-S4	4"	1/4"	Female 20 SAE	0.65			\$ 144.37
28-BFVF-S5	5"	1/4"	Female 20 SAE	1.55			\$ 188.57
28-BFVF-S6	6"	1/4"	Female 20 SAE	2.15			\$ 285.23
28-BFVF-S8	8"	3/8"	Female 16 SAE	6.50			\$ 400.72

JET PUMP AIR CONTROL

Boshart's jet pump air controls are for jet systems that cures waterlogged tanks. They have a positive action control which is simple in construction. There is no flexing diaphragm or metal springs. Jet pump air controls will operate on as little as 5" of vacuum and fits all size tanks up to and including 82 gallon (may be easily manifolded for larger size tanks).
Primary Material: Plastic



Part No.	Maximum Tank Size	Quantity		List Price - A
		L1	L2	

List Price Effective: April 15, 2022



Air Control

- NSF/ANSI Standard 372 Certified

AVC-P	82 gal		25	\$ 20.82
-------	--------	--	----	----------

Air Control Installation Package

Contains 4' of poly tubing and (2) 1/4" MIP x 1/4" Barb brass adapters.

- NSF/ANSI Standard 372 Certified

AVC-PK	82 gal			\$ 14.05
--------	--------	--	--	----------

Air Control Package

Contains an air control and the installation package.

- NSF/ANSI Standard 372 Certified

AVC-PKC	82 gal			\$ 28.36
---------	--------	--	--	----------

Contact your sales rep for any further information

Toll Free: 1-800-561-3164
boshart.com

NON-REPAIRABLE AIR VOLUME CONTROLS

These non-repairable air volume controls prolong the pump life by reducing cycling frequency.

• NSF/ANSI Standard 372 Certified

Primary Material: Zinc Plated Steel, Maximum Pressure: 100 PSI



Part No.	Tank Connection	Pump Connection	Maximum Tank Size	Quantity		List Price -A
				L1	L2	

List Price Effective: April 15, 2022

Boshart

AVC45	1/4" MPT	1/4" Male Comp Thread	42 gal	20		\$ 12.16
AVC100	3/8" MPT	1/4" Male Comp Thread	120 gal	20		\$ 12.16

Brady

AV45F	1/4" MPT	1/8" FPT	70 gal			\$ 76.66
AV45	1/4" MPT	1/4" Male Comp Thread	70 gal			\$ 74.48
AV100F	3/8" MPT	1/8" FPT	120 gal			\$ 95.78
AV100	3/8" MPT	1/4" Male Comp Thread	120 gal			\$ 86.29

REPAIRABLE AIR VOLUME CONTROLS

Repairable air volume controls reduce cycling frequency and can be used on jet, centrifugal & rotary pumps.

Primary Material: Zinc-die Cast, Maximum Pressure: 100 PSI



Part No.	Tank Connection	Pump Connection	Maximum Tank Size	Quantity		List Price -A
				L1	L2	

List Price Effective: April 15, 2022

Brady

AV30	1/4" FPT	7/16" - 24 THD	42 gal			\$ 97.45
AV42	1/4" FPT	1/4" FPT	70 gal			\$ 147.74
AV80	1/4" FPT	1/4" FPT	120 gal			\$ 126.71
AV120	1/4" FPT	1/4" FPT	220 gal			\$ 178.63

AIR VOLUME CONTROL REPAIR KITS

These are for the repairable air volume controls. Each kit includes a diaphragm, springs, screws, nuts, ball and seal which are needed for a quick and simple repair job.



Part No.	Description	Quantity		List Price -A
		L1	L2	

List Price Effective: April 15, 2022

AV-30-3A	For AV30			\$ 45.04
AV-42-3A	For AV42			\$ 48.85
AV-80-3A	For AV80			\$ 61.67
AV-120-3A	For AV120			\$ 81.92

Contact your sales rep for any further information

Toll Free: 1-800-561-3164
boshart.com

AVC INSTALLATION KIT

A fitting attaches to suction side of pump for air volume control use and to pressure side of pump for pressure switch use or the second fitting attaches to pump side of AV42, AV80 and AV120 air volume controls for air volume control use. For pressure switch installation, it attaches to pressure switch and pressure side of pump.

Part No.

Quantity List
L1 L2 Price -A
List Price Effective: April 15, 2022

Includes:

- (2) Fitting No. 75-1/8 1/4" Barb x 1/8" MPT Plastic Fitting
- (2) Fitting No. 75-1/4 1/4" Barb x 1/4" MPT 90 Elbow Plastic Fitting
- (1) Fitting No. 78E 1/4" Barb x 7/16" Compression Elbow Plastic Fitting
- (1) 4' of Polyethylene Tubing 1/4" I.D. x 3/8" O.D.

AVC-UK1

\$ 44.19

WELL AIR VOLUME CONTROLS

All housings are tapped for use with a 1/4" FPT gauge.



Part No.	Brand	Housing	Tank Connection	Pressure Range	Quantity L1 L2	List Price -A
----------	-------	---------	-----------------	----------------	----------------	---------------

List Price Effective: April 15, 2022



Deep Well Adjustable Air Release

- Air release valve factory set at 25 PSI

AVC-AE10	Boshart	Plastic	1-1/4" MPT	0-40 PSI	50	\$ 45.93
----------	---------	---------	------------	----------	----	----------

Deep Well Adjustable Air Release

- Air release valve factory set at 25 PSI
- NSF/ANSI Standard 372 Certified

AVC-DW-AR	Boshart	Zinc die-cast	1-1/4" MPT	0-40 PSI	50	\$ 39.83
-----------	---------	---------------	------------	----------	----	----------

Deep Well Air Release

- NSF/ANSI Standard 372 Certified

AVC-DWP	Boshart	Plastic	1-1/4" MPT		50	\$ 43.86
---------	---------	---------	------------	--	----	----------

Shallow Well Control

- 48" of 1/4" poly tubing & brass mini barb adapters included
- NSF/ANSI Standard 372 Certified

AVC-L	Ametek	Zinc die-cast	1-1/4" MPT		20	\$ 99.46
-------	--------	---------------	------------	--	----	----------

Deep Well Air Release

- NSF/ANSI Standard 372 Certified

AVC-PENN-WJ	PENN	Plastic	1-1/4" MPT		50	\$ 52.35
-------------	------	---------	------------	--	----	----------

Shallow Well Control

- 48" of 1/4" poly tubing & brass mini barb adapters included
- NSF/ANSI Standard 372 Certified

AVC-SW	Boshart	Zinc die-cast	1-1/4" MPT		50	\$ 33.00
--------	---------	---------------	------------	--	----	----------

Deep Well Adjustable Air Release

- Air release valve factory set at 25 PSI
- NSF/ANSI Standard 372 Certified

AVC-WJ	Ametek	Zinc die-cast	1-1/4" MPT	0-40 PSI	20	\$ 89.21
--------	--------	---------------	------------	----------	----	----------

Contact your sales rep for any further information

Toll Free: 1-800-561-3164
boshart.com

FLOMATIC FLOW CONTROLS

These automatic flow control valves are designed to give constant flow over a wide pressure range. The internal controlling mechanism has no moving part, consisting only of a flexible orifice that varies with applied pressure maintaining a constant flow rate.

• NSF/ANSI 61 & 372

Temperature Range: Up to 180°F (82°C)



Part No. **Flow** **Quantity** **List**
 L1 **L2** **Price - A**
List Price Effective: May 27, 2022

3/8" FPT

Stainless Steel, Hex: 0.875", Overall Length: 1.75"



CDA.19	0.19 GPM		\$ 39.80
CDA.25	0.25 GPM		\$ 39.80
CDA.50	0.5 GPM		\$ 39.80
CDA.75	0.75 GPM		\$ 39.80
CDA1.0	1 GPM		\$ 39.80

1/2" FPT

Stainless Steel, Hex: 1.000", Overall Length: 2.00"



CDB1.0	1 GPM		\$ 48.85
CDB1.5	1.5 GPM		\$ 48.85
CDB2.0	2 GPM		\$ 48.85
CDB2.5	2.5 GPM		\$ 48.85
CDB3.0	3 GPM		\$ 48.85
CDB3.5	3.5 GPM		\$ 48.85
CDB4.0	4 GPM		\$ 48.85
CDB5.0	5 GPM		\$ 48.85
CDB6.0	6 GPM		\$ 48.85

3/4" FPT

Stainless Steel, Hex: 1.250", Overall Length: 2.25"



CDC1.0	1 GPM		\$ 81.42
CDC1.5	1.5 GPM		\$ 81.42
CDC2.0	2 GPM		\$ 81.42
CDC2.5	2.5 GPM		\$ 81.42
CDC3.0	3 GPM		\$ 81.42
CDC3.5	3.5 GPM		\$ 81.42
CDC4.0	4 GPM		\$ 81.42
CDC4.5	4.5 GPM		\$ 81.42
CDC5.0	5 GPM		\$ 81.42
CDC6.0	6 GPM		\$ 81.42
CDC7.0	7 GPM		\$ 81.42
CDC8.0	8 GPM		\$ 81.42
CDC9.0	9 GPM		\$ 81.42
CDC10	10 GPM		\$ 81.42
CDC11.5	11.5 GPM		\$ 81.42

Part No. **Flow** **Quantity** **List**
 L1 **L2** **Price - A**
List Price Effective: May 27, 2022

3/4" MPT x FPT

Stainless Steel, Hex: 1.250", Overall Length: 1.50"



CDY1.0	1 GPM		\$ 103.30
CDY1.5	1.5 GPM		\$ 103.30
CDY2.0	2 GPM		\$ 87.21
CDY2.5	2.5 GPM		\$ 103.30
CDY3.0	3 GPM		\$ 103.30
CDY4.0	4 GPM		\$ 103.30
CDY5.0	5 GPM		\$ 103.30
CDY6.0	6 GPM		\$ 103.30
CDY7.0	7 GPM		\$ 103.30
CDY8.0	8 GPM		\$ 103.30
CDY9.0	9 GPM		\$ 103.30
CDY10	10 GPM		\$ 103.30
CDY11.5	11.5 GPM		\$ 103.30

1" FPT

Stainless Steel, Hex: 1.500", Overall Length: 2.75"



CDX1.0	1 GPM		\$ 95.82
CDX1.5	1.5 GPM		\$ 95.82
CDX2.0	2 GPM		\$ 95.82
CDX2.5	2.5 GPM		\$ 95.82
CDX3.0	3 GPM		\$ 95.82
CDX3.5	3.5 GPM		\$ 95.82
CDX4.0	4 GPM		\$ 95.82
CDX4.5	4.5 GPM		\$ 95.82
CDX5.0	5 GPM		\$ 95.82
CDX6.0	6 GPM		\$ 95.82
CDX7.0	7 GPM		\$ 95.82
CDX8.0	8 GPM		\$ 95.82
CDX9.0	9 GPM		\$ 95.82
CDX10	10 GPM		\$ 95.82
CDX12	12 GPM		\$ 95.82
CDX15	15 GPM		\$ 95.82
CDX20	20 GPM		\$ 95.82
CDX25	25 GPM		\$ 95.82
CDX30	30 GPM		\$ 95.82

Contact your sales rep for any further information

Toll Free: 1-800-561-3164
boshart.com

FLOMATIC FLOW CONTROLS

Part No.	Flow	Quantity	List
		L1 L2	Price - A

List Price Effective: May 27, 2022



1-1/4" MPT

Stainless Steel, Hex: 1.625", Overall Length: 3.00"

CDP1.0	1 GPM		\$ 173.67
CDP1.5	1.5 GPM		\$ 173.67
CDP2.0	2 GPM		\$ 173.67
CDP2.5	2.5 GPM		\$ 173.67
CDP3.0	3 GPM		\$ 173.67
CDP3.5	3.5 GPM		\$ 173.67
CDP4.0	4 GPM		\$ 173.67
CDP5.0	5 GPM		\$ 173.67
CDP6.0	6 GPM		\$ 173.67
CDP7.0	7 GPM		\$ 173.67
CDP8.0	8 GPM		\$ 173.67
CDP9.0	9 GPM		\$ 173.67
CDP10	10 GPM		\$ 180.87
CDP12	12 GPM		\$ 180.87
CDP15	15 GPM		\$ 180.87
CDP20	20 GPM		\$ 180.87
CDP25	25 GPM		\$ 180.87
CDP30	30 GPM		\$ 180.87

Part No.	Flow	Quantity	List
		L1 L2	Price - A

List Price Effective: May 27, 2022



1-1/2" MPT

Stainless Steel, Hex: 1.813", Overall Length: 3.00"

CDT9.0	9 GPM		\$ 233.37
CDT10	10 GPM		\$ 233.37
CDT12	12 GPM		\$ 233.37
CDT15	15 GPM		\$ 233.37
CDT20	20 GPM		\$ 233.37
CDT25	25 GPM		\$ 233.37
CDT30	30 GPM		\$ 233.37



2" MPT

Stainless Steel, Hex: 2.375", Overall Length: 3.00"

CDF9.0	9 GPM		\$ 353.15
CDF10	10 GPM		\$ 353.15
CDF12	12 GPM		\$ 353.15
CDF15	15 GPM		\$ 353.15
CDF17	17 GPM		\$ 353.15
CDF20	20 GPM		\$ 353.15
CDF25	25 GPM		\$ 353.15
CDF30	30 GPM		\$ 353.15

Contact your sales rep for any further information

Toll Free: 1-800-561-3164
boshart.com

DOLE FLOW CONTROLS

These automatic flow control valves are designed to give constant flow over a wide pressure range. The internal controlling mechanism has no moving part, consisting only of a flexible orifice that varies with applied pressure maintaining a constant flow rate.

• NSF/ANSI 372 Certified

Temperature Range: Up to 180°F (82°C)



Part No. **Flow** **Quantity** **List**
 L1 **L2** **Price - A**
List Price Effective: April 15, 2022

3/8" FPT

Nickel Plated Brass, Hex: 0.875", Overall Length: 1.75"



FCGA-.125NL	0.13 GPM	POR
FCGA-.1875NL	0.19 GPM	POR
FCGA-.35NL	0.35 GPM	POR
FCGA-.75NL	0.75 GPM	POR
FCGA-1NL	1 GPM	POR

1" FPT

Nickel Plated Brass, Hex: 1.500", Overall Length: 2.75"



FCGB-1.5NL	13.5 GPM	POR
FCGB-2NL	2 GPM	POR
FCGB-2.5NL	2.5 GPM	POR
FCGB-3NL	3 GPM	POR
FCGB-3.5NL	3.5 GPM	POR
FCGB-4NL	4 GPM	POR
FCGB-5NL	5 GPM	POR
FCGB-6NL	6 GPM	POR

1" FPT

Nickel Plated Brass, Hex: 1.500", Overall Length: 2.75"



FCGC-1NL	1 GPM	POR
FCGC-2NL	2 GPM	POR
FCGC-3NL	3 GPM	POR
FCGC-4NL	4 GPM	POR
FCGC-7NL	7 GPM	POR
FCGC-10NL	10 GPM	POR
FCGC-11.5NL	11.5 GPM	POR

1" FPT

Nickel Plated Brass, Hex: 1.500", Overall Length: 2.75"



FCGX-5.5NL	5.5 GPM	POR
FCGX-12NL	13.5 GPM	POR
FCGX-13.5NL	13.5 GPM	POR
FCGX-20NL	20 GPM	POR
FCGX-30NL	30 GPM	POR

Part No. **Flow** **Quantity** **List**
 L1 **L2** **Price - A**
List Price Effective: April 15, 2022

1" MPT X 3/4" FPT

Nickel Plated Brass, Hex: 1.500", Overall Length: 2.75"



FCGY-1NL	1 GPM	POR
FCGY-1.5NL	1.5 GPM	POR
FCGY-2NL	2 GPM	POR
FCGY-3NL	3 GPM	POR
FCGY-4NL	4 GPM	POR
FCGY-5NL	5 GPM	POR
FCGY-6NL	6 GPM	POR
FCGY-7NL	7 GPM	POR
FCGY-8NL	8 GPM	POR

1-1/4" MPT

Zinc Plated Steel, Hex: 1.625", Overall Length: 3.00"



FCGP-7NL	7 GPM	POR
FCGP-8NL	8 GPM	POR
FCGP-10NL	12 GPM	POR
FCGP-12NL	12 GPM	POR
FCGP-15NL	15 GPM	POR
FCGP-20NL	20 GPM	POR

1-1/2" MPT

Zinc Plated Steel, Hex: 1.8125", Overall Length: 3.00"



FCGT-10NL	10 GPM	POR
FCGT-15NL	15 GPM	POR
FCGT-25NL	25 GPM	POR
FCGT-30NL	30 GPM	POR

2" MPT

Zinc Plated Steel, Hex: 2.375", Overall Length: 3.00"



FCGF-12NL	12 GPM	POR
FCGF-15NL	15 GPM	POR
FCGF-20NL	20 GPM	POR
FCGF-25NL	25 GPM	\$ 353.00
FCGF-30NL	30 GPM	POR

2-1/2" MPT

Zinc Plated Steel, Hex: 2.875", Overall Length: 4.00"



FCGH-40NL	40 GPM	\$ 752.26
FCGH-45NL	45 GPM	POR
FCGH-50NL	50 GPM	\$ 752.26
FCGH-55NL	55 GPM	POR
FCGH-60NL	60 GPM	\$ 752.26
FCGH-70NL	70 GPM	\$ 752.26

Contact your sales rep for any further information

Toll Free: 1-800-561-3164
boshart.com