

# PLUMBING VALVES

Offering a variety  
of connection types  
for a wide range of  
applications



**BOSHART**  
INDUSTRIES

**INDEX**

<b>Product Line</b>	<b>Page</b>
Brass Gate Valves	1
Mini Brass Ball Valves	2
Brass Ball Valves	2
Brass Ball Valves with Drain	6
Brass Ball Valves - Locking Handle	7
Stainless Steel Ball Valves	8
PVC Ball Valves	9
Premium PVC Ball Valves	10
Bent Nose Garden Valves	12
Gas Ball Valves	12
Hose Bibbs / Sampling Faucets	13
No-Kink Hose Bibbs	13
Brass Sillcocks	14
Sediment Faucets / Boiler Drains	15
Stop / Stop & Waste Valves	16
Chrome Plated Non-Freeze Lawn Faucets	16
Vacuum Breakers	18
Chrome Plated Supply Stops	19
Ice Maker Chrome Plated Supply Stops	20
Washing Machine Chrome Plated Supply Stops	20

### BRASS GATE VALVES

Brass gate valves are used to shut off water supply. They are an excellent choice where this needs to be done slowly by turning the black hand wheel. No lead options are available for potable water applications.

Part No.      Size      Port Size      Quantity      List  
L1    L2    Price - A  
List Price Effective: April 15, 2022



#### Full Port Brass, Stem Packing Material: PTFE, Black Cast Hand Wheel Handle FPT Connection

Temperature Range: Up to 150°F (66°C), Maximum Pressure: 200 PSI WOG  
• NSF/ANSI Standard 372 Certified



0818-02NL	1/4"	0.43"	10	120	\$ 22.65
0818-03NL	3/8"	0.47"	10	120	\$ 22.65
0818-05NL	1/2"	0.53"	10	120	\$ 22.65
0818-07NL	3/4"	0.75"	10	80	\$ 30.94
0818-10NL	1"	0.98"	5	60	\$ 45.99
0818-12NL	1-1/4"	1.26"	5	40	\$ 64.86
0818-15NL	1-1/2"	1.50"	5	30	\$ 82.48
0818-20NL	2"	1.93"	2	20	\$ 125.50
0818-25NL	2-1/2"	2.44"	2	12	\$ 231.79
0818-30NL	3"	2.95"	8		\$ 315.11
0818-40NL	4"	3.62"	4		\$ 487.49



#### Full Port Brass, Stem Packing Material: PTFE, Black Cast Hand Wheel Handle CxC Connection

Temperature Range: Up to 150°F (66°C), Maximum Pressure: 200 PSI WOG  
• NSF/ANSI Standard 372 Certified



0818C-05NL	1/2"	0.53"	10	120	\$ 22.65
0818C-07NL	3/4"	0.75"	10	80	\$ 30.94
0818C-10NL	1"	0.98"	5	60	\$ 45.99
0818C-12NL	1-1/4"	1.26"	5	40	\$ 64.86
0818C-15NL	1-1/2"	1.50"	5	30	\$ 82.48
0818C-20NL	2"	1.93"	2	20	\$ 125.50



#### Full Port Brass, Stem Packing Material: PTFE, Black Cast Hand Wheel Handle FPT Connection

Temperature Range: Up to 150°F (66°C), Maximum Pressure: 200 PSI WOG

0818-05	1/2"	0.53"	10	120	\$ 18.53
0818-07	3/4"	0.75"	10	80	\$ 25.31
0818-10	1"	0.98"	5	60	\$ 37.72
0818-12	1-1/4"	1.26"	5	40	\$ 53.18
0818-15	1-1/2"	1.50"	5	30	\$ 67.58
0818-20	2"	1.93"	2	20	\$ 102.92
0818-25	2-1/2"	2.44"	2	12	\$ 189.99
0818-30	3"	2.95"	8		\$ 258.33
0818-40	4"	3.62"	4		\$ 399.71

Contact your sales rep for any further information

Toll Free: 1-800-561-3164  
boshart.com

### MINI BRASS BALL VALVES

These ball valves are designed as an easy shut off in 1/4" or 1/8" pipe applications. They are no lead and can be used for potable water applications.

Part No.	Size	Port Size	Quantity		List Price - A
			L1	L2	

List Price Effective: April 15, 2022



**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Tee Handle**  
**FPT Connection**

Temperature Range: Up to 180°F (82°C), Maximum Pressure: 600 PSI CWP  
 • NSF/ANSI Standard 372 Certified

0828-01NL	1/8"	0.30"	20	200	\$ 12.21
0828-02NL	1/4"	0.30"	20	200	\$ 11.73



**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Tee Handle**  
**MPT x FPT Connection**

Temperature Range: Up to 180°F (82°C), Maximum Pressure: 600 PSI CWP  
 • NSF/ANSI Standard 372 Certified

0828-01M01FNL	1/8"	0.30"	20	200	\$ 12.29
0828-01M02FNL	1/8" x 1/4"	0.30"	20	200	\$ 11.97
0828-02M02FNL	1/4"	0.30"	20	200	\$ 11.83



### BRASS BALL VALVES

Boshart's Brass Ball Valves are an excellent choice for a variety of applications where there is low risk of corrosion. Most connections come in both a leaded and no lead version to accommodate for potable water.

Part No.	Size	Port Size	Quantity		List Price - A
			L1	L2	

List Price Effective: April 15, 2022



**Standard Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle**  
**Comp Connection**

Temperature Range: Up to 300°F (149°C), Maximum Pressure: 200 PSI CWP  
 • NSF/ANSI Standard 61 & 372 Certified  
 • cUPC Standard IGC 157 Certified

Note: Can be used to make connections between Copper, Brass, Aluminum, Plastic, CPVC & Pex tubing. Not recommended for use with steel tubing, designed for use with tube manufactured to CTS-OD tubing.

082CPND-05NL	1/2"	0.59"	10	100	\$ 23.15
082CPND-07NL	3/4"	0.78"	10	60	\$ 34.90
082CPND-10NL	1"	0.98"	6	30	\$ 52.80



**Standard Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle**  
**PEX Connection**

Temperature Range: Up to 203°F (95°C), Maximum Pressure: 400 PSI CWP  
 • NSF/ANSI Standard 61 & 372 Certified  
 • cUPC Standard IGC 157 Certified

0821P-03NL	3/8"	0.39"	10	120	\$ 17.29
0821P-05NL	1/2"	0.39"	10	120	\$ 8.34
0821P-07NL	3/4"	0.59"	10	90	\$ 13.41
0821P-10NL	1"	0.79"	6	30	\$ 22.50



Contact your sales rep for any further information

Toll Free: 1-800-561-3164  
 boshart.com

### BRASS BALL VALVES

Part No. Size Port Size Quantity List  
L1 L2 Price - A  
List Price Effective: April 15, 2022



**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE,  
Ball Material: Stainless Steel, PVC Handle**  
**FPT Connection**

Temperature Range: -20°F to 300°F (-29°C to 149°C), Maximum Pressure: 600 PSI CWP

- NSF/ANSI Standard 61 & 372 Certified
- cUPC Standard IGC 157 Certified
- CSA listed to the following standard
  - ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
- Threads conform to ANSI / ASME B1.20.1

0825-02NL	1/4"	0.39"	12	120	\$ 10.91
0825-03NL	3/8"	0.39"	12	120	\$ 10.91
0825-05NL	1/2"	0.59"	10	100	\$ 13.64
0825-07NL	3/4"	0.78"	8	64	\$ 20.14
0825-10NL	1"	0.98"	6	30	\$ 32.80
0825-12NL	1-1/4"	1.26"	6	24	\$ 50.34
0825-15NL	1-1/2"	1.57"	4	16	\$ 69.62
0825-20NL	2"	1.97"	2	8	\$ 97.48



**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE,  
Ball Material: Stainless Steel, PVC Handle**  
**CxC Connection**

Temperature Range: -20°F to 300°F (-29°C to 149°C), Maximum Pressure: 600 PSI CWP

- NSF/ANSI Standard 61 & 372 Certified
- cUPC Standard IGC 157 Certified
- CSA listed to the following standard
  - ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
- Threads conform to ANSI / ASME B1.20.1

0825C-05NL	1/2"	0.59"	10	100	\$ 11.58
0825C-07NL	3/4"	0.79"	8	64	\$ 18.44
0825C-10NL	1"	0.98"	6	30	\$ 31.05
0825C-12NL	1-1/4"	1.26"	6	24	\$ 48.64
0825C-15NL	1-1/2"	1.58"	4	16	\$ 67.94
0825C-20NL	2"	1.97"	2	8	\$ 95.79



**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE,  
Ball Material: Stainless Steel, PVC Handle**  
**FPT Connection**

Temperature Range: Up to 300°F (149°C), Maximum Pressure: 600 PSI CWP

- NSF/ANSI Standard 61 & 372 Certified
- cUPC Standard IGC 157 Certified (1/4" - 2" only)
- CSA listed to the following standards (1/4" - 2" only)
  - ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
  - ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
  - ASME B16.33 & CAN/CGA 3.16 : 125 PSIG (BRS125G / CAN 3.16)
- UL listed to the following standards (1/4" - 2" only)
  - UL 1477 (YQNZ): Compressed gas shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2")
  - UL 842 (YRBX): Flammable liquid shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2")
  - UL 842 (YRPV): Gas shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2")
  - UL 842 (MHKZ): Manual valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2")
  - UL 125 (YSdT): LP-Gas shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2")
- FM Standard 1140 Certified (1/4" - 2" only)

0827-02NL	1/4"	0.39"	12	120	\$ 12.24
0827-03NL	3/8"	0.39"	12	120	\$ 12.16
0827-05NL	1/2"	0.59"	10	100	\$ 15.91
0827-07NL	3/4"	0.75"	8	64	\$ 24.03
0827-10NL	1"	0.98"	6	30	\$ 39.16
0827-12NL	1-1/4"	1.25"	6	24	\$ 60.53
0827-15NL	1-1/2"	1.57"	4	16	\$ 81.95
0827-20NL	2"	1.97"	2	8	\$ 113.62
0827-25NL	2-1/2"	2.52"	2	4	\$ 281.38
0827-30NL	3"	2.95"	4		\$ 374.45
0827-40NL	4"	3.90"	2		\$ 691.32

Contact your sales rep for any further information

Toll Free: 1-800-561-3164  
boshart.com

### BRASS BALL VALVES



Part No.	Size	Port Size	Quantity		List Price - A
			L1	L2	

List Price Effective: April 15, 2022

**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Stainless Steel, PVC Handle**  
**Cx C Connection**

Temperature Range: Up to 300°F (149°C), Maximum Pressure: 600 PSI CWP

- NSF/ANSI Standard 61 & 372 Certified
- cUPC Standard IGC 157 Certified (1/4" - 2" only)
- UL listed to the following standards (1/4" - 2" only)
  - UL 1477 (YQNZ): Compressed gas shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2")
  - UL 842 (YRBX): Flammable liquid shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2")
  - UL 842 (YRPV): Gas shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2")
  - UL 842 (MHKZ): Manual valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2")
  - UL 125 (YSDT): LP-Gas shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2")
- FM Standard 1140 Certified (1/4" - 2" only)

0827C-05NL	1/2"	0.59"	10	100	\$ 14.74
0827C-07NL	3/4"	0.75"	8	64	\$ 22.75
0827C-10NL	1"	0.98"	6	30	\$ 37.11
0827C-12NL	1-1/4"	1.25"	6	24	\$ 56.91
0827C-15NL	1-1/2"	1.57"	4	16	\$ 78.93
0827C-20NL	2"	1.97"	2	8	\$ 119.54
0827C-25NL	2-1/2"	2.52"	2	4	\$ 267.21
0827C-30NL	3"	2.95"	4		\$ 349.13
0827C-40NL	4"	3.90"	2		\$ 660.39



**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, PVC Handle**  
**FPT Connection**

Temperature Range: Up to 300°F (149°C), Maximum Pressure: 600 PSI CWP

- cUPC Standard IGC 157 Certified (1/4" - 2" only)
- CSA listed to the following standards (1/4" - 2" only)
  - ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
  - ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
  - ASME B16.33 & CAN/CGA 3.16 : 125 PSIG (BRS125G / CAN 3.16)
- UL listed to the following standards (1/4" - 2" only)
  - UL 1477 (YQNZ): Compressed gas shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2")
  - UL 842 (YRBX): Flammable liquid shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2")
  - UL 842 (YRPV): Gas shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2")
  - UL 842 (MHKZ): Manual valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2")
  - UL 125 (YSDT): LP-Gas shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2")
- FM Standard 1140 Certified (1/4" - 2" only)
- Stainless Steel Ball for sizes 1-1/4" to 4"

0827-02	1/4"	0.39"	12	120	\$ 10.80
0827-03	3/8"	0.39"	12	120	\$ 11.30
0827-05	1/2"	0.59"	10	100	\$ 14.33
0827-07	3/4"	0.75"	8	64	\$ 23.62
0827-10	1"	0.98"	6	30	\$ 35.24
0827-12	1-1/4"	1.25"	6	24	\$ 54.70
0827-15	1-1/2"	1.57"	4	16	\$ 73.74
0827-20	2"	1.97"	2	8	\$ 113.82
0827-25	2-1/2"	2.52"	2	4	\$ 260.91
0827-30	3"	2.95"	4		\$ 350.90
0827-40	4"	3.90"	2		\$ 622.17

Contact your sales rep for any further information

**Toll Free: 1-800-561-3164**  
**boshart.com**



### BRASS BALL VALVES



Part No.	Size	Port Size	Quantity		List Price - A
			L1	L2	

List Price Effective: April 15, 2022

**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE,  
Ball Material: Stainless Steel, Rubber Grip Handle  
Cx Connection**

Temperature Range: Up to 300°F (149°C), Maximum Pressure: 600 PSI CWP

- cUPC Standard IGC 157 Certified (1/4" - 2" only)
- UL listed to the following standards (1/4" - 2" only)
  - UL 1477 (YQNZ): Compressed gas shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2")
  - UL 842 (YRBX): Flammable liquid shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2")
  - UL 842 (YRPV): Gas shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2")
  - UL 842 (MHKZ): Manual valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2")
  - UL 125 (YSDT): LP-Gas shutoff valves - 600 PSI (1/4" - 1") 300 PSI (1-1/4" - 2")
- FM Standard 1140 Certified (1/4" - 2" only)

0827C-05	1/2"	0.59"	10	100	\$ 13.26
0827C-07	3/4"	0.75"	8	64	\$ 21.56
0827C-10	1"	0.98"	6	30	\$ 35.82
0827C-12	1-1/4"	1.25"	6	24	\$ 52.24
0827C-15	1-1/2"	1.57"	4	16	\$ 75.80
0827C-20	2"	1.97"	2	8	\$ 115.09
0827C-25	2-1/2"	2.52"	2	4	\$ 240.51
0827C-30	3"	2.95"	4		\$ 360.18
0827C-40	4"	3.90"	2		\$ 583.69



**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE,  
Ball Material: Chrome Plated, Rubber Grip Handle  
Push Fit Connection**

Temperature Range: Up to 200°F (93°C), Maximum Pressure: 200 PSI

- NSF/ANSI Standard 61 & 372 Certified
- ASSE Standard 1061 Certified

082PF-05NL	1/2"	0.63"	10	120	\$ 18.42
082PF-07NL	3/4"	0.88"	10	60	\$ 28.15
082PF-10NL	1"	1.13"	6	30	\$ 45.02

Contact your sales rep for any further information

Toll Free: 1-800-561-3164  
boshart.com

### BRASS BALL VALVES WITH DRAIN

Boshart's Brass Ball Valves with a drain are perfect for applications where water needs to be drained from the pipe after the valve. When installing one of these valves make sure the drain is not installed on the supply side of the valve.

Part No.	Size	Port Size	Quantity		List Price - A
			L1	L2	

List Price Effective: April 15, 2022



**Standard Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle**  
**Comp Connection**

Temperature Range: Up to 300°F (149°C), Maximum Pressure: 200 PSI CWP

• NSF/ANSI Standard 61 & 372 Certified

• cUPC Standard IGC 157 Certified

Note: Can be used to make connections between Copper, Brass, Aluminum, Plastic, CPVC & Pex tubing. Not recommended for use with steel tubing, designed for use with tube manufactured to CTS-OD tubing.

Note: Can be used to make connections between Copper, Brass, Aluminum, Plastic, CPVC & Pex tubing. Not recommended for use with steel tubing, designed for use with tube manufactured to CTS-OD tubing.

082CP-05NL	1/2"	0.59"	10	100	\$ 24.42
082CP-07NL	3/4"	0.79"	10	60	\$ 36.17
082CP-10NL	1"	0.98"	6	30	\$ 54.17



**Standard Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle**  
**PEX Connection**

Temperature Range: Up to 203°F (95°C), Maximum Pressure: 400 PSI CWP

• NSF/ANSI Standard 61 & 372 Certified

• cUPC Standard IGC 157 Certified

0821WDP-05NL	1/2"	0.39"	10	120	\$ 10.07
0821WDP-07NL	3/4"	0.59"	10	90	\$ 16.34
0821WDP-10NL	1"	0.79"	6	30	\$ 27.90



**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle**  
**FPT Connection**

Temperature Range: Up to 300°F (149°C), Maximum Pressure: 600 PSI WOG

• NSF/ANSI Standard 61 & 372 Certified

• cUPC Standard IGC 157 Certified

082WD-05NL	1/2"	0.59"	10	120	\$ 20.19
082WD-07NL	3/4"	0.75"	10	60	\$ 31.78
082WD-10NL	1"	1.02"	6	30	\$ 50.06



**Full Port Brass, Seat Material: PTFE, Stem Packing Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle**  
**CxC Connection**

Temperature Range: Up to 300°F (149°C), Maximum Pressure: 600 PSI WOG

• NSF/ANSI Standard 61 & 372 Certified

• cUPC Standard IGC 157 Certified

082WDC-05NL	1/2"	0.59"	10	120	\$ 18.57
082WDC-07NL	3/4"	0.75"	10	60	\$ 29.19
082WDC-10NL	1"	1.02"	6	30	\$ 47.75



**Full Port Brass, Seat Material: PTFE, Ball Material: Chrome Plated, Rubber Grip Handle**  
**Push Fit Connection**

Temperature Range: Up to 200°F (93°C), Maximum Pressure: 200 PSI

• NSF/ANSI Standard 61 & 372 Certified

• ASSE Standard 1061 Certified

082PF-05WDNL	1/2"	0.63"	10	120	\$ 20.55
082PF-07WDNL	3/4"	0.88"	10	60	\$ 31.17
082PF-10WDNL	1"	1.13"	6	30	\$ 47.99



Contact your sales rep for any further information

Toll Free: 1-800-561-3164

boshart.com



## BRASS BALL VALVES - LOCKING HANDLE

Boshart's Brass Ball Valves with a locking handle can be locked in the open or closed position with a padlock. This provides more security and prevents the ball valve from being tampered with.



Part No.	Size	Port Size	Quantity		List Price - A
			L1	L2	

List Price Effective: April 15, 2022

**Full Port Brass, Seat Material: PTFE, Stem Packing Material: Viton,  
Ball Material: Chrome Plated, Rubber Grip Handle  
FPT Connection**

Temperature Range: Up to 350°F (177°C), Maximum Pressure: 600 PSI CWP  
Maximum Pressure Rating of 450 PSI CWP for sizes 2-1/2" to 4"

- NSF/ANSI Standard 61 Certified
  - CSA listed to the following standards (1/4" - 2" only)
    - ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
    - ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)
    - ASME B16.33 & CAN/CGA 3.16 : 125 PSIG (BRS125G / CAN 3.16)
  - UL listed to the following standards
    - UL 258 (VQGU): Trim and drain valves - 600 PSI (1/4" - 2")
    - UL 1477 (YQNZ): Compressed gas shutoff valves - 600 PSI (1/4" - 2") 450 PSI (2-1/2" - 4")
    - UL 842 (YRBX): Flammable liquid shutoff valves - 600 PSI (1/4" - 2") 250 PSI (2-1/2" - 4")
    - UL 842 (YRPV): Gas shutoff valves - 600 PSI (1/4" - 2") 250 PSI (2-1/2" - 4")
    - UL 842 (MHKZ): Manual valves - 600 PSI (1/4" - 2") 250 PSI (2-1/2" - 4")
    - UL 125 (YSdT): LP-Gas shutoff valves - 600 PSI (1/4" - 2") 450 PSI (2-1/2" - 4")
  - CRN Registered 0C0966
  - Manufactured according to MSS SP-110
- Note: Padlock not included.

0826LH-02	1/4"	0.31"	12	192	\$ 46.15
0826LH-03	3/8"	0.39"	12	192	\$ 46.15
0826LH-05	1/2"	0.59"	8	128	\$ 49.51
0826LH-07	3/4"	0.79"	12	96	\$ 67.42
0826LH-10	1"	0.98"	8	64	\$ 105.38
0826LH-12	1-1/4"	1.26"	8	32	\$ 169.06
0826LH-15	1-1/2"	1.57"	6	24	\$ 220.04
0826LH-20	2"	1.97"	4	16	\$ 316.59
0826LH-25	2-1/2"	2.56"	2		\$ 984.54
0826LH-30	3"	3.15"			\$ 1,341.12
0826LH-40	4"	3.94"			\$ 2,125.30

Contact your sales rep for any further information

**Toll Free: 1-800-561-3164**  
boshart.com

### STAINLESS STEEL BALL VALVES

Boshart's Stainless Steel Ball Valves come in 2 different materials to suit a variety of applications. 304 CF8 Stainless Steel can be used in conventional situations, where 316 CF8M Stainless Steel can be used in more demanding environments.

Part No.                      Size                      Port Size                      Quantity    List  
    L1    L2    Price - A  
 List Price Effective: April 15, 2022



**Full Port 316 Stainless Steel, Seat Material: PTFE, Stem Packing Material: PTFE,  
 Ball Material: Stainless Steel, Stainless Steel Locking Handle  
 FPT Connection**

Temperature Range: Up to 450°F (232°C), Maximum Pressure: 1000 PSI  
 • NSF/ANSI Standard 372 Certified



SSBV1000-02	1/4"	0.45"	15	90	\$ 26.48
SSBV1000-03	3/8"	0.47"	15	90	\$ 26.48
SSBV1000-05	1/2"	0.59"	9	54	\$ 33.42
SSBV1000-07	3/4"	0.78"	6	36	\$ 44.63
SSBV1000-10	1"	0.98"	4	24	\$ 68.13
SSBV1000-12	1-1/4"	1.26"	2	12	\$ 100.19
SSBV1000-15	1-1/2"	1.49"	6	12	\$ 142.56
SSBV1000-20	2"	1.96"	3	6	\$ 208.56
SSBV1000-25	2-1/2"	2.55"	4		\$ 473.48
SSBV1000-30	3"	3.15"			\$ 780.58



**Standard Port 316 Stainless Steel, Seat Material: PTFE, Stem Packing Material: PTFE,  
 Ball Material: Stainless Steel, Stainless Steel Locking Handle  
 FPT Connection**

Temperature Range: Up to 450°F (232°C), Maximum Pressure: 2000 PSI  
 • NSF/ANSI Standard 372 Certified



SSBV2000-02	1/4"	0.37"	12	72	\$ 28.28
SSBV2000-03	3/8"	0.37"	12	72	\$ 28.28
SSBV2000-05	1/2"	0.50"	12	72	\$ 35.21
SSBV2000-07	3/4"	0.69"	6	36	\$ 52.83
SSBV2000-10	1"	0.88"	5	30	\$ 73.84
SSBV2000-12	1-1/4"	1.00"	2	12	\$ 102.26
SSBV2000-15	1-1/2"	1.25"	6	12	\$ 147.75
SSBV2000-20	2"	1.50"	4	8	\$ 220.07



**Full Port 304 Stainless Steel, Seat Material: PTFE, Stem Packing Material: PTFE,  
 Ball Material: Stainless Steel, Stainless Steel Handle  
 FPT Connection**

Temperature Range: 14°F to 248°F (-10°C to 120°C), Maximum Pressure: 1000 PSI  
 • NSF/ANSI Standard 372 Certified



SSBV304-02	1/4"	0.43"	20	120	\$ 18.12
SSBV304-03	3/8"	0.49"	20	120	\$ 18.12
SSBV304-05	1/2"	0.59"	16	96	\$ 19.26
SSBV304-07	3/4"	0.79"	10	60	\$ 27.52
SSBV304-10	1"	0.98"	10	40	\$ 43.28
SSBV304-12	1-1/4"	1.26"	6	24	\$ 61.79
SSBV304-15	1-1/2"	1.50"	4	16	\$ 80.92
SSBV304-20	2"	1.97"	2	12	\$ 118.70
SSBV304-25	2-1/2"	2.56"	2	4	\$ 236.62
SSBV304-30	3"	2.99"	4		\$ 320.17
SSBV304-40	4"	3.70"	2		\$ 580.66



**304 Stainless Steel, Seat Material: PTFE, Stem Packing Material: Nitrile Rubber,  
 Ball Material: Stainless Steel, Stainless Steel  
 PEX Connection**

Temperature Range: -40°F to 200°F (-40°C to 93°C), Maximum Pressure: 600 PSI CWP  
 • NSF/ANSI Standard 61 & 372 Certified  
 • cUPC Certified



SSPEXBV-05	1/2"		20	120	\$ 16.57
SSPEXBV-07	3/4"		15	90	\$ 18.36
SSPEXBV-10	1"		5	30	\$ 21.96

Contact your sales rep for any further information

Toll Free: 1-800-561-3164  
 boshart.com

### PVC BALL VALVES

PVC Ball Valves are durable and excellent for a variety of applications, including water supply, swimming pools, and irrigation applications. 0922CTS series are for hot water applications.



Part No. Size Port Size Quantity List  
L1 L2 Price - A  
List Price Effective: April 15, 2022

**PVC, Seat Material: EPDM, Stem Packing Material: EPDM, Ball Material: PVC,  
ABS Tee Handle  
FPT Connection**

Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)

• NSF/ANSI Standard 372 Certified

Suitable for both Schedule 40 & 80 PVC Pipe.

0929-05	1/2"	0.59"	200	\$ 2.40
0929-07	3/4"	0.79"	160	\$ 3.55
0929-10	1"	0.98"	96	\$ 5.54
0929-12	1-1/4"	1.26"	72	\$ 7.64
0929-15	1-1/2"	1.42"	45	\$ 10.72
0929-20	2"	1.81"	36	\$ 17.08
0929-25	2-1/2"	2.48"	12	\$ 40.83
0929-30	3"	3.15"	8	\$ 64.23
0929-40	4"	3.81"	6	\$ 121.34



**PVC, Seat Material: EPDM, Stem Packing Material: EPDM, Ball Material: PVC,  
ABS Tee Handle  
Slip Connection**

Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)

• NSF/ANSI Standard 372 Certified

Suitable for both Schedule 40 & 80 PVC Pipe.

0929S-05	1/2"	0.59"	200	\$ 2.31
0929S-07	3/4"	0.79"	160	\$ 3.38
0929S-10	1"	0.98"	96	\$ 5.54
0929S-12	1-1/4"	1.26"	72	\$ 7.29
0929S-15	1-1/2"	1.42"	45	\$ 10.58
0929S-20	2"	1.81"	36	\$ 16.38
0929S-25	2-1/2"	2.48"	12	\$ 38.95
0929S-30	3"	3.15"	8	\$ 60.93
0929S-40	4"	3.81"	6	\$ 115.28



**True Union UPVC, Seat Material: PTFE, Stem Packing Material: EPDM,  
Ball Material: UPVC, ABS Tee Handle  
FPT or Slip Connection**

Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)

Note: Double union / double block design permits in-line maintenance without disconnecting pipe. Ends are blocked with bayonet style lock to prevent ball from being blown out. Handle is equipped with removable spanner device.

Suitable for both Schedule 40 & 80 PVC Pipe.

0924-05	1/2"	0.51"	48	\$ 12.73
0924-07	3/4"	0.55"	36	\$ 16.71
0924-10	1"	0.84"	24	\$ 23.16
0924-12	1-1/4"	1.28"	24	\$ 34.15
0924-15	1-1/2"	2.03"	24	\$ 45.50
0924-20	2"	3.86"	12	\$ 62.76



**CPVC, Seat Material: PTFE, Stem Packing Material: EPDM, Ball Material: CPVC,  
ABS Tee Handle  
CTS Connection**

Temperature Range: Short: 212°F (100°C), Continuous: 32°F to 194°F (0°C to 90°C),

Maximum Pressure: Working: 150 PSI @ 73°F (23°C), Test: 225 PSI

• NSF/ANSI Standard 61 & 372 Certified

Suitable for cold & hot water.

0922CTS-05	1/2"	0.49"	360	\$ 3.52
0922CTS-07	3/4"	0.72"	224	\$ 5.77
0922CTS-10	1"	0.93"	120	\$ 9.96
0922CTS-12	1-1/4"	0.98"	96	\$ 14.27
0922CTS-15	1-1/2"	1.18"	72	\$ 20.47
0922CTS-20	2"	1.42"	36	\$ 29.68




Contact your sales rep for any further information


Toll Free: 1-800-561-3164  
boshart.com

PVC Ball Valves are durable and excellent for a variety of applications, including water supply, swimming pools, and irrigation applications.

Part No.	Size	Port Size	Quantity	List Price - A
			L1 L2	
List Price Effective: April 15, 2022				

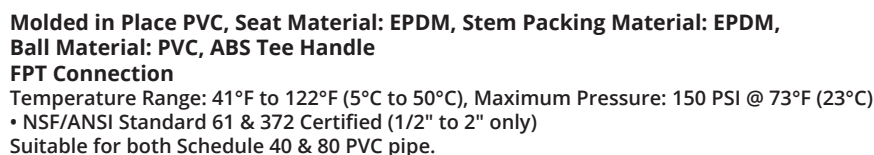


0921-05	1/2"	0.55"	100	\$ 4.47
0921-07	3/4"	0.79"	100	\$ 5.97
0921-10	1"	0.98"	100	\$ 7.95
0921-12	1-1/4"	1.18"	100	\$ 9.99
0921-15	1-1/2"	1.42"	48	\$ 17.10
0921-20	2"	1.83"	24	\$ 22.69
0921-25	2-1/2"	2.36"	12	\$ 53.49
0921-30	3"	3.03"	12	\$ 92.17
0921-40	4"	3.93"	6	\$ 173.11

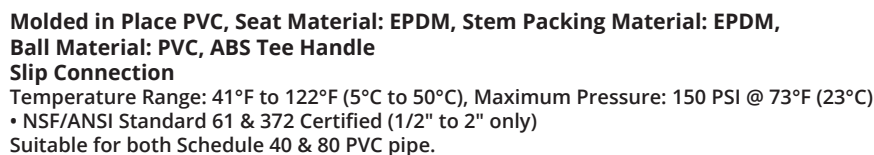


 **NO LEAD** ✓  
**<0.25% Pb**  
**by weighted avg**


0921S-05	1/2"	0.55"	100	\$ 4.47
0921S-07	3/4"	0.79"	100	\$ 5.97
0921S-10	1"	0.98"	100	\$ 7.95
0921S-12	1-1/4"	1.18"	100	\$ 9.99
0921S-15	1-1/2"	1.42"	48	\$ 17.10
0921S-20	2"	1.83"	24	\$ 22.69
0921S-25	2-1/2"	2.36"	12	\$ 53.49
0921S-30	3"	3.03"	12	\$ 92.17
0921S-40	4"	3.93"	6	\$ 173.11



0923-05	1/2"	0.55"	100	\$ 9.93
0923-07	3/4"	0.79"	100	\$ 11.79
0923-10	1"	0.98"	100	\$ 17.42
0923-12	1-1/4"	1.18"	100	\$ 19.88
0923-15	1-1/2"	1.42"	48	\$ 34.84
0923-20	2"	1.83"	24	\$ 43.76



0923S-05	1/2"	0.55"	100	\$ 9.46
0923S-07	3/4"	0.79"	100	\$ 11.41
0923S-10	1"	0.98"	100	\$ 16.84
0923S-12	1-1/4"	1.18"	100	\$ 19.24
0923S-15	1-1/2"	1.42"	48	\$ 34.84
0923S-20	2"	1.83"	24	\$ 42.36

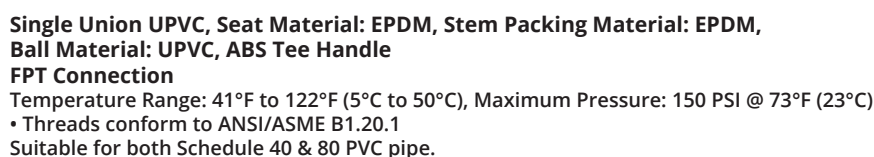

Rev. 5.4

### PREMIUM PVC BALL VALVES

Part No.                      Size                      Port Size                      Quantity List  
L1    L2    Price - A  
List Price Effective: April 15, 2022



**Single Union UPVC, Seat Material: EPDM, Stem Packing Material: EPDM,  
Ball Material: UPVC, ABS Tee Handle**  
**Slip Connection**

Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)

• Slip connections conform to ASTM D2466

Suitable for both Schedule 40 & 80 PVC pipe.



0933S-15	1-1/2"	1.52"	48	\$ 17.83
0933S-20	2"	1.89"	24	\$ 25.90



**True Union UPVC, Seat Material: PTFE, Stem Packing Material: EPDM,  
Ball Material: UPVC, ABS Tee Handle**  
**FPT or Slip Connection**

Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)

Note: Double union / double block design permits in-line maintenance without disconnecting pipe. Ends are blocked with bayonet style lock to prevent ball from being blown out. Handle is equipped with removable spanner device.

Suitable for both Schedule 40 & 80 PVC pipe.



0925-05NL	1/2"	0.51"	48	\$ 17.91
0925-07NL	3/4"	0.71"	36	\$ 24.19
0925-10NL	1"	0.91"	24	\$ 33.56
0925-12NL	1-1/4"	1.18"	24	\$ 49.48
0925-15NL	1-1/2"	1.50"	24	\$ 65.90
0925-20NL	2"	1.89"	12	\$ 90.79
0925-25NL	2-1/2"	2.36"	6	\$ 172.84
0925-30NL	3"	2.72"	6	\$ 298.36
0925-40NL	4"	3.94"		\$ 580.08



**True Union UPVC, Seat Material: PTFE, Stem Packing Material: Viton,  
Ball Material: UPVC, ABS Tee Handle**  
**FPT or Slip Connection**

Temperature Range: 41°F to 122°F (5°C to 50°C), Maximum Pressure: 150 PSI @ 73°F (23°C)

Note: Double union / double block design permits in-line maintenance without disconnecting pipe. Ends are blocked with bayonet style lock to prevent ball from being blown out. Handle is equipped with removable spanner device.

Suitable for both Schedule 40 & 80 PVC pipe.



0926-05	1/2"	0.51"	48	\$ 23.31
0926-07	3/4"	0.71"	36	\$ 30.94
0926-10	1"	0.91"	24	\$ 41.00
0926-12	1-1/4"	1.18"	24	\$ 53.98
0926-15	1-1/2"	1.50"	24	\$ 76.58
0926-20	2"	1.89"	12	\$ 110.65
0926-25	2-1/2"	2.36"	6	\$ 189.91
0926-30	3"	2.72"	6	\$ 296.53
0926-40	4"	3.94"		\$ 591.86

Contact your sales rep for any further information

Toll Free: 1-800-561-3164  
boshart.com

### GAS BALL VALVES

Boshart's Gas Ball Valves have a two piece forged brass body and a blow out proof stem. Available in combinations of FPT, Flare and MPT threads. Options for a 1/8" tapping for a manometer which allows line pressure to be tested at the valve are available. FPT connections are available with a yellow or red handle.

**Seat Material: PTFE,**

Temperature Range: -4°F to 149°F (-20°C to 65°C), Maximum Pressure: 250 PSI

• CSA listed to the following standards

- ANSI Z21.15 & CGA 9.1: 1/2 PSIG (1/2PSI)
- ASME B16.44 & CGA/CR91-002: 5 PSIG (5G)

• UL listed to the following standards

- UL 842 (YRPV): Gas shutoff valves - 250 PSI
- UL 842 (MHKZ): Manual valves - 250 PSI
- UL 125 (YSDT): LP-Gas shutoff valves - 250 PSI

Part No.	Size	Port Size	Quantity	List Price - A
L1	L2			

List Price Effective: April 15, 2022

**Two Piece Forged Brass, Yellow Tee Handle FPT**



0832-03	3/8"	0.39"	10	100	\$ 8.99
0832-05	1/2"	0.39"	10	100	\$ 9.32
0832-07	3/4"	0.59"	10	100	\$ 13.49
0832-10	1"	0.75"	6	60	\$ 22.73

**Two Piece Forged Brass, Red Tee Handle FPT**



0832R-03	3/8"	0.39"	10	100	\$ 8.99
0832R-05	1/2"	0.39"	10	100	\$ 9.32
0832R-07	3/4"	0.59"	10	100	\$ 13.49
0832R-10	1"	0.75"	6	60	\$ 22.73

**Two Piece Forged with Tap Brass, Yellow Tee Handle FPT**



0832TP-05	1/2"	0.39"	10	100	\$ 12.64
0832TP-07	3/4"	0.59"	10	100	\$ 17.26

Part No.	Size	Port Size	Quantity	List Price - A
L1	L2			

List Price Effective: April 15, 2022

**Two Piece Forged Brass, Yellow Tee Handle FPT x Flare**



0833-0503	1/2" x 3/8"	0.39"	10	100	\$ 9.74
0833-0505	1/2"	0.39"	10	100	\$ 11.01

**Two Piece Forged Brass, Yellow Tee Handle MPT x Flare**



0834-0503	1/2" x 3/8"	0.39"	10	100	\$ 10.09
0834-0505	1/2"	0.39"	10	100	\$ 10.85

**Two Piece Forged Brass, Yellow Tee Handle Flare**



0835-03	3/8"	0.27"	10	100	\$ 9.81
0835-05	1/2"	0.38"	10	100	\$ 10.38

**Two Piece Forged with Tap Brass, Yellow Tee Handle Flare**



0835TP-03	3/8"	0.27"	10	100	\$ 12.76
0835TP-05	1/2"	0.38"	10	100	\$ 13.49

### BENT NOSE GARDEN VALVES

Boshart's Bent Nose Garden Valves are designed with an angled outlet. This allows a garden hose to be attached easily without the risk of a kink being formed.

Part No.	Size	Quantity	List Price - A
L1	L2		

List Price Effective: April 15, 2022



**Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Graphite, Green Rubber Coated Hand Wheel Handle FPT x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

- NSF/ANSI Standard 372 Certified
- CSA Standard B125.1 Certified

0872-07NL	3/4"	12	72	\$ 28.65
0872-10NL	1" x 3/4"	12	72	\$ 32.62



Contact your sales rep for any further information

Toll Free: 1-800-561-3164  
boshart.com



### HOSE BIBBS / SAMPLING FAUCETS

Boshart's Hose Bibbs are available in brass, stainless steel or plastic. They come in multi-turn or 1/4 turn.



Part No. Size Quantity List  
L1 L2 Price - A  
List Price Effective: April 15, 2022

**Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Tee Handle**

**MPT x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

• NSF/ANSI Standard 61 & 372 Certified

0871-05NL	1/2" x 3/4"	10	100	\$ 15.73
0871-07NL	3/4"	10	100	\$ 17.81



**Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Tee Handle**

**MPT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

• NSF/ANSI Standard 61 & 372 Certified

0874-05NL	1/2"	10	100	\$ 14.49
0874-07NL	3/4"	10	100	\$ 15.88



**Angled Brass, Seat Material: PTFE, Stem Packing Material: Nitrile Rubber, Tee Handle**

**MPT x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 200 PSI

• NSF/ANSI Standard 61 & 372 Certified

0852-05NL	1/2" x 3/4"	10	100	\$ 18.45
0852-07NL	3/4"	10	100	\$ 23.38



**Angled Stainless Steel, Seat Material: PTFE, Stem Packing Material: PTFE, Tee Handle**

**MPT x GHT Connection**

Temperature Range: Up to 248°F (120°C), Maximum Pressure: 200 PSI

• NSF/ANSI Standard 372 Certified

SSHB52-05	1/2" x 3/4"	10	100	\$ 24.56
SSHB52-07	3/4"	10	100	\$ 29.59



**Angled Stainless Steel, Seat Material: PTFE, Stem Packing Material: PTFE, Tee Handle**

**MPT Connection**

Temperature Range: Up to 248°F (120°C), Maximum Pressure: 200 PSI

• NSF/ANSI Standard 372 Certified

SSSF52-05	1/2"	10	100	\$ 24.56
SSSF52-07	3/4"	10	100	\$ 29.59



**Angled ABS, Seat Material: PTFE, Stem Packing Material: Nitrile Rubber, Tee Handle**

**MPT x GHT Connection**

Temperature Range: Up to 180°F (82°C), Maximum Pressure: 145 PSI

PHB-05	1/2" x 3/4"	200		\$ 4.58
PHB-07	3/4"	200		\$ 5.80



### NO-KINK HOSE BIBBS

Boshart's No-Kink Hose Bibbs are designed with an angled outlet. This allows a garden hose to be attached easily without the risk of a kink being formed.



Part No. Size Quantity List  
L1 L2 Price - A  
List Price Effective: April 15, 2022

**Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Brass Plated Tee Handle**

**MPT x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

• NSF/ANSI Standard 61 & 372 Certified

• CSA Standard B125.1 Certified

0875-05NL	1/2" x 3/4"	10	100	\$ 14.32
0875-07NL	3/4"	10	100	\$ 16.05



Contact your sales rep for any further information

Toll Free: 1-800-561-3164

boshart.com

### NO-KINK HOSE BIBBS

Part No.                      Size                      Quantity    List  
    L1    L2    Price - A  
 List Price Effective: April 15, 2022



**Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Brass Plated Tee Handle**

**FPT x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified

0875F-05NL	1/2" x 3/4"	10	100	\$ 13.83
0875F-07NL	3/4"	10	100	\$ 14.74



**Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Graphite, Green Epoxy Coated Tee Handle**

**MPT x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified

0875H-05NL	1/2" x 3/4"	12	72	\$ 22.22
0875H-07NL	3/4"	12	72	\$ 23.27



**Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Graphite, Green Epoxy Coated Tee Handle**

**FPT x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified

0875HF-05NL	1/2" x 3/4"	12	72	\$ 21.16
0875HF-07NL	3/4"	12	72	\$ 23.27



### BRASS SILLCOCKS

Boshart's Brass Sillcocks are ideal for cold water applications.

Part No.                      Size                      Quantity    List  
    L1    L2    Price - A  
 List Price Effective: April 15, 2022



**Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Black Cast Hand Wheel Handle**

**FPT x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified

0873-05NL	1/2" x 3/4"	12	144	\$ 17.76
0873-07NL	3/4"	12	144	\$ 19.56



**Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber, Black Cast Hand Wheel Handle**

**CxC x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified

0873C-05NL	1/2" x 3/4"	12	144	\$ 20.04
------------	-------------	----	-----	----------



Contact your sales rep for any further information

Toll Free: 1-800-561-3164  
 boshart.com

## SEDIMENT FAUCETS / BOILER DRAINS

Boshart's Sediment Faucets can be used to flush sediment build-up from pressure tanks. There are two designs, straight and angled, for when connecting a hose is required.

Part No.                      Size                      Quantity    List  
    L1    L2    Price - A  
    List Price Effective: April 15, 2022



**Straight Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber,  
 Black Cast Hand Wheel Handle  
 MPT x GHT Connection**

Temperature Range: Up to 212°F (100°C), Maximum Pressure: 125 PSI

- NSF/ANSI 61 Certified
- CSA B125.1 Certified

0853-05NL	1/2" x 3/4"	10	100	\$ 15.71
0853-07NL	3/4"	10	100	\$ 17.20



**Straight Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber,  
 Black Cast Hand Wheel Handle  
 FPT x GHT Connection**

Temperature Range: Up to 212°F (100°C), Maximum Pressure: 125 PSI

- NSF/ANSI 61 Certified
- CSA B125.1 Certified

0853F-05NL	1/2" x 3/4"	10	100	\$ 16.57
0853F-07NL	3/4"	10	100	\$ 17.87



**Straight Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber,  
 Black Cast Hand Wheel Handle  
 MPT x GHT Connection**

Temperature Range: Up to 212°F (100°C), Maximum Pressure: 125 PSI

- NSF/ANSI 61 Certified
- CSA B125.1 Certified

0851-05	1/2" x 3/4"	10	100	\$ 10.96
0851-07	3/4"	10	100	\$ 12.07



**Straight Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber,  
 Black Cast Hand Wheel Handle  
 PEX x GHT Connection**

Temperature Range: Up to 212°F (100°C), Maximum Pressure: 125 PSI

- NSF/ANSI 61 Certified
- CSA B125.1 Certified

0851P-05NL	1/2" x 3/4"	10	100	\$ 22.33
------------	-------------	----	-----	----------



**Straight Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber,  
 Blue Triangular Handle  
 MPT x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

- NSF/ANSI 372 Certified
- CSA B125.1 Certified

0845SF-05NL	1/2" x 3/4"	10	100	\$ 17.12
0845SF-07NL	3/4"	10	100	\$ 18.38



**Angled Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber,  
 Blue Triangular Handle  
 MPT x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

- NSF/ANSI 372 Certified
- CSA B125.1 Certified

0845SFA-05NL	1/2" x 3/4"	12	144	\$ 18.32
0845SFA-07NL	3/4"	12	144	\$ 19.79



**Straight Brass, Seat Material: Nitrile Rubber, Stem Packing Material: Nitrile Rubber,  
 Zinc Plated Handle  
 MPT x GHT Connection**

Temperature Range: Up to 160°F (71°C), Maximum Pressure: 125 PSI

- NSF/ANSI 372 Certified
- CSA B125.1 Certified

0846SF-05NL	1/2" x 3/4"	10	100	\$ 18.00
0846SF-07NL	3/4"	10	100	\$ 19.00



Contact your sales rep for any further information

Toll Free: 1-800-561-3164  
 boshart.com

### STOP / STOP & WASTE VALVES

Boshart's Stop / Stop & Waste Valves are excellent for anywhere a compact, economical shut off is required. These come in two options, with a drain hole and cap and without the drain.

Part No.	Size	Quantity		List Price - A
		L1	L2	

List Price Effective: April 15, 2022



**Stop Brass, Seat Material: Nitrile Rubber, Black Cast Hand Wheel Handle  
FPT Connection**

Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI  
• NSF/ANSI 61 & 372 Certified  
• CSA B125.1 Certified

0843-05NL	1/2"	10	100	\$ 12.21
0843-07NL	3/4"	10	100	\$ 14.28



**Stop Brass, Seat Material: Nitrile Rubber, Black Cast Hand Wheel Handle  
CxC Connection**

Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI  
• NSF/ANSI 61 & 372 Certified  
• CSA B125.1 Certified

0843C-05NL	1/2"	10	100	\$ 10.84
0843C-07NL	3/4"	10	100	\$ 13.99



**Stop & Waste Brass, Seat Material: Nitrile Rubber, Black Cast Hand Wheel Handle  
FPT Connection**

Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI  
• NSF/ANSI 61 & 372 Certified  
• CSA B125.1 Certified

0844-05NL	1/2"	10	100	\$ 12.81
0844-07NL	3/4"	10	100	\$ 15.20



**Stop & Waste Brass, Seat Material: Nitrile Rubber, Black Cast Hand Wheel Handle  
CxC Connection**

Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI  
• NSF/ANSI 61 & 372 Certified  
• CSA B125.1 Certified

0844C-05NL	1/2"	10	100	\$ 11.08
0844C-07NL	3/4"	10	100	\$ 14.17



**Stop & Waste Brass, Seat Material: Nitrile Rubber, Black Cast Hand Wheel Handle  
Comp Connection**

Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI  
• NSF/ANSI 61 & 372 Certified  
• CSA B125.1 Certified  
Note: Can be used to make connections between Copper, Brass, Aluminum, Plastic, CPVC & Pex tubing. Not recommended for use with steel tubing, designed for use with tube manufactured to CTS-OD tubing.

0844CPR-05NL	1/2"	10	100	\$ 20.21
0844CPR-07NL	3/4"	10	100	\$ 25.97



### CHROME PLATED NON-FREEZE LAWN FAUCETS

Boshart's Non-Freeze Lawn Faucets get installed through a wall and allow the water to drain back out of the valve so it won't freeze in the winter. This prevents winterizing and allows outdoor access to water year round.

Part No.	Size	Length	Quantity		List Price - A
			L1	L2	

List Price Effective: May 27, 2022



**Without Self Draining Vacuum Breaker, Seat Material: Nitrile Rubber,  
Black Cast Hand Wheel Handle  
MPT or Copper x GHT Connection**

Temperature Range: Up to 120°F (49°C), Maximum Pressure: 125 PSI  
• NSF/ANSI Standard 61 & 372 Certified  
• CSA Standard B125.1 Certified

0861-080NL	1/2" x 3/4"	8"	2	40	\$ 36.49
0861-100NL	1/2" x 3/4"	10"	2	40	\$ 37.87
0861-120NL	1/2" x 3/4"	12"	2	40	\$ 39.17
0861-140NL	1/2" x 3/4"	14"	2	40	\$ 38.83



Contact your sales rep for any further information

Toll Free: 1-800-561-3164  
boshart.com

### CHROME PLATED NON-FREEZE LAWN FAUCETS

Part No. Size Length Quantity List  
L1 L2 Price - A  
List Price Effective: May 27, 2022



**With Self Draining Vacuum Breaker, Seat Material: Viton, Black Cast Hand Wheel Handle  
MPT or Copper x GHT Connection**

Temperature Range: Up to 140°F (60°C), Maximum Pressure: 125 PSI

- 1/4 turn
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- ASSE Standard 1019 Certified



08QTDH05-040NL	1/2" x 3/4"	4"	2	40	\$ 58.35
08QTDH05-060NL	1/2" x 3/4"	6"	2	40	\$ 60.46
08QTDH05-080NL	1/2" x 3/4"	8"	2	40	\$ 63.88
08QTDH05-100NL	1/2" x 3/4"	10"	2	40	\$ 66.11
08QTDH05-120NL	1/2" x 3/4"	12"	2	40	\$ 68.33
08QTDH05-140NL	1/2" x 3/4"	14"	2	40	\$ 70.54



**With Self Draining Vacuum Breaker, Seat Material: Viton, Black Cast Hand Wheel Handle  
PEX x GHT Connection**

Temperature Range: Up to 140°F (60°C), Maximum Pressure: 125 PSI

- 1/4 turn
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- ASSE Standard 1019 Certified



08QTDH05P-080NL	1/2" x 3/4"	8"	2	40	\$ 63.88
08QTDH05P-100NL	1/2" x 3/4"	10"	2	40	\$ 66.11
08QTDH05P-120NL	1/2" x 3/4"	12"	2	40	\$ 68.33
08QTDH05P-140NL	1/2" x 3/4"	14"	2	40	\$ 70.54



**With Self Draining Vacuum Breaker, Seat Material: Viton, Black Cast Hand Wheel Handle  
MPT or FPT x GHT Connection**

Temperature Range: Up to 140°F (60°C), Maximum Pressure: 125 PSI

- 1/4 turn
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- ASSE Standard 1019 Certified



08QTDH07-100NL	3/4" or 1/2" x 3/4"	10"	2	40	\$ 68.33
08QTDH07-120NL	3/4" or 1/2" x 3/4"	12"	2	40	\$ 70.54
08QTDH07-140NL	3/4" or 1/2" x 3/4"	14"	2	40	\$ 72.70



**With Self Draining Vacuum Breaker, Seat Material: Nitrile Rubber,  
Black Cast Hand Wheel Handle  
MPT or Copper x GHT Connection**

Temperature Range: Up to 140°F (60°C), Maximum Pressure: 125 PSI

0865-040	1/2" x 3/4"	4"	2	40	\$ 34.39
0865-060	1/2" x 3/4"	6"	2	40	\$ 36.13
0865-080	1/2" x 3/4"	8"	2	40	\$ 37.99
0865-100	1/2" x 3/4"	10"	2	40	\$ 39.73
0865-120	1/2" x 3/4"	12"	2	40	\$ 41.75
0865-140	1/2" x 3/4"	14"	2	40	\$ 43.47
0865-160	1/2" x 3/4"	16"	2	40	\$ 48.52
0865-180	1/2" x 3/4"	18"	2	40	\$ 51.09
0865-200	1/2" x 3/4"	20"	2	40	\$ 53.68
0865-220	1/2" x 3/4"	22"	2	40	\$ 56.28
0865-240	1/2" x 3/4"	24"	2	40	\$ 58.86



**With Self Draining Vacuum Breaker, Seat Material: Nitrile Rubber,  
Black Cast Hand Wheel Handle  
MPT or Copper x GHT Connection**

Temperature Range: Up to 140°F (60°C), Maximum Pressure: 125 PSI

- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- ASSE Standard 1019 Certified



0865-040NL	1/2" x 3/4"	4"	2	40	\$ 38.05
0865-060NL	1/2" x 3/4"	6"	2	40	\$ 40.03
0865-080NL	1/2" x 3/4"	8"	2	40	\$ 42.10
0865-100NL	1/2" x 3/4"	10"	2	40	\$ 44.02
0865-120NL	1/2" x 3/4"	12"	2	40	\$ 46.21
0865-140NL	1/2" x 3/4"	14"	2	40	\$ 48.11

Contact your sales rep for any further information

Toll Free: 1-800-561-3164  
boshart.com

### CHROME PLATED NON-FREEZE LAWN FAUCETS

Part No.	Size	Length	Quantity		List Price - A
			L1	L2	

List Price Effective: May 27, 2022



**With Self Draining Vacuum Breaker, Seat Material: Nitrile Rubber, Black Cast Hand Wheel Handle**  
**PEX x GHT Connection**  
 Temperature Range: Up to 140°F (60°C), Maximum Pressure: 125 PSI

0865P-040	1/2" x 3/4"	4"	2	40	\$ 36.55
0865P-060	1/2" x 3/4"	6"	2	40	\$ 38.44
0865P-080	1/2" x 3/4"	8"	2	40	\$ 37.99
0865P-100	1/2" x 3/4"	10"	2	40	\$ 39.73
0865P-120	1/2" x 3/4"	12"	2	40	\$ 41.75
0865P-140	1/2" x 3/4"	14"	2	40	\$ 43.47



**With Self Draining Vacuum Breaker, Seat Material: Nitrile Rubber, Black Cast Hand Wheel Handle**  
**PEX x GHT Connection**  
 Temperature Range: Up to 140°F (60°C), Maximum Pressure: 125 PSI  
 • NSF/ANSI Standard 61 & 372 Certified  
 • CSA Standard B125.1 Certified  
 • ASSE Standard 1019 Certified

0865P-040NL	1/2" x 3/4"	4"	2	40	\$ 38.05
0865P-060NL	1/2" x 3/4"	6"	2	40	\$ 40.03
0865P-080NL	1/2" x 3/4"	8"	2	40	\$ 42.10
0865P-100NL	1/2" x 3/4"	10"	2	40	\$ 44.02
0865P-120NL	1/2" x 3/4"	12"	2	40	\$ 46.21
0865P-140NL	1/2" x 3/4"	14"	2	40	\$ 48.11



### VACUUM BREAKERS

Vacuum Breakers install easily to any 3/4" hose faucet to provide back-siphonage protection. They feature a break-away set screw to make a permanent vandal-proof installation.

- CSA Standard B64.2 Certified
- ASSE Standard 1011 Certified

Part No.	Size	Quantity		List Price - A
		L1	L2	

List Price Effective: May 27, 2022



**Manual Draining Brass, FGHT x MGHT Connection**  
 Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI

0881-07	3/4"	10	200	\$ 7.92
---------	------	----	-----	---------



**Manual Draining Brass, FGHT x MGHT Connection**  
 Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI

0881-07NL	3/4"	10	200	\$ 10.03
-----------	------	----	-----	----------



**Auto Draining Brass, FGHT x MGHT Connection**  
 Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI  
 Self-drains when all hose attachments are removed, protecting the valve or faucet from freezing in colder weather.

0882-07NL	3/4"	10	200	\$ 14.47
-----------	------	----	-----	----------



Contact your sales rep for any further information

Toll Free: 1-800-561-3164  
 boshart.com



### CHROME PLATED SUPPLY STOPS

Supply stops are an excellent low pressure shut off valve generally found at the appliance. They come in different connections and configurations to meet all needs.

**Seat Material: PTFE, Stem Packing Material: EPDM,**

Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI

- 1/4 Turn
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- Connections conform to the following standards
  - Threads ANSI/ASME B1.20.1
  - CxC ANSI B16.18

- CPVC ASTM D2846
- PEX ASTM F1807
- Push Fit ASSE 1061
- Compression SAE J512
- Cold Expansion ASTM F1960

Part No.	Size	Connection Type	Quantity		List
			L1	L2	Price - A

List Price Effective: April 15, 2022



#### Angled

08SVA-03FNL	3/8"	FPT x Comp	20	240	\$ 9.21
08SVA-05CEPNL	1/2" x 3/8"	Cold Expansion x Comp	20	240	\$ 12.69
08SVA-05CNL	1/2" x 3/8"	Copper x Comp	20	240	\$ 9.21
08SVA-05FNL	1/2" x 3/8"	FPT x Comp	20	240	\$ 10.56
08SVA-05PF02CPNL	1/2" x 1/4"	Push Fit x Comp	20	240	\$ 13.86
08SVA-05PFNL	1/2" x 3/8"	Push Fit x Comp	20	240	\$ 13.62
08SVA-05PNL	1/2" x 3/8"	PEX x Comp	20	240	\$ 8.92
08SVA-05VNL	1/2" x 3/8"	CPVC x Comp	20	240	\$ 14.26
08SVA-58CPNL	5/8" x 3/8"	Comp	20	240	\$ 12.08



#### Dual Outlet

08SVD-05F03CPNL	1/2" x 3/8" x 3/8"	FPT x Comp	20	240	\$ 19.23
08SVD-58CP03CPNL	5/8" x 3/8" x 3/8"	Comp	20	240	\$ 22.21



#### Dual Outlet Dual Shut-Off

08SVDD-05F03CPNL	1/2" x 3/8"	FPT x Comp	10	120	\$ 33.61
08SVDD-58CP03CPNL	5/8" x 3/8"	Comp	10	120	\$ 37.32



#### Straight

08SVS-03FNL	3/8"	FPT x Comp	20	240	\$ 8.92
08SVS-05CEPNL	1/2" x 3/8"	Cold Expansion x Comp	20	240	\$ 12.37
08SVS-05CNL	1/2" x 3/8"	Copper x Comp	20	240	\$ 8.67
08SVS-05FNL	1/2" x 3/8"	FPT x Comp	20	240	\$ 10.94
08SVS-05P05PNL	1/2"	PEX	20	240	\$ 7.30
08SVS-05PFNL	1/2" x 3/8"	Push Fit x Comp	20	240	\$ 13.28
08SVS-05PNL	1/2" x 3/8"	PEX x Comp	20	240	\$ 8.56
08SVS-05VNL	1/2" x 3/8"	CPVC x Comp	20	240	\$ 13.99
08SVS-58CPNL	5/8" x 3/8"	Comp	20	240	\$ 11.69
08SVS-RFNL	3/8"	Swivel Nut x CPR	20	240	\$ 12.08



#### Tee

08SVT-05PF02CPNL	1/2" x 1/4"	Push Fit x Comp	10	120	\$ 16.51
08SVT-05PFNL	1/2" x 3/8"	Push Fit x Comp	10	120	\$ 16.79



Contact your sales rep for any further information

Toll Free: 1-800-561-3164  
boshart.com

### ICE MAKER CHROME PLATED SUPPLY STOPS

Supply stops are an excellent low pressure shut off valve generally found at appliances. They come in different connections and configurations to meet all needs.

Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI

- 1/4 Turn
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- Connections conform to the following standards
  - Threads ANSI/ASME B1.20.1

- CxC ANSI B16.18
- PEX ASTM F1807
- Compression SAE J512



Part No.	Size	Quantity			List Price - A
		L1	L2		

List Price Effective: April 15, 2022

#### Ice Maker Copper x Comp



08SVA-05C02CPNL	1/2" x 1/4"	20	240	\$ 9.06
-----------------	-------------	----	-----	---------

#### Ice Maker FPT x Comp



08SVA-05F02CPNL	1/2" x 1/4"	20	240	\$ 10.21
-----------------	-------------	----	-----	----------

Part No.	Size	Quantity			List Price - A
		L1	L2		

List Price Effective: April 15, 2022

#### Ice Maker PEX x Comp



08SVA-05P02CPNL	1/2" x 1/4"	20	240	\$ 8.44
-----------------	-------------	----	-----	---------

#### Ice Maker Comp



08SVA-58CP02CPNL	5/8" x 1/4"	20	240	\$ 11.81
------------------	-------------	----	-----	----------

### WASHING MACHINE CHROME PLATED SUPPLY STOPS

Supply stops are an excellent low pressure shut off valve generally found at appliances. They come in different connections and configurations to meet all needs. These washing machine valves have color coded handles for hot and cold water supplies.

Temperature Range: Up to 180°F (82°C), Maximum Pressure: 125 PSI

- 1/4 Turn
- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- Connections conform to the following standards
  - Threads ANSI/ASME B1.20.1

- CxC ANSI B16.18
- PEX ASTM F1807
- Compression SAE J512



Part No.	Size	Quantity			List Price - A
		L1	L2		

List Price Effective: April 15, 2022

#### Angled Blue Plastic Handle MPT or Comp x GHT



08SVAWMB-05MNL	1/2" x 3/4"	20	240	\$ 16.69
----------------	-------------	----	-----	----------

#### Angled Blue Plastic Handle PEX x GHT



08SVAWMB-05PNL	1/2" x 3/4"	20	240	\$ 17.92
----------------	-------------	----	-----	----------

#### Angled Blue Plastic Handle CPR x GHT



08SVAWMB-58CPNL	5/8" x 3/4"	20	240	\$ 17.92
-----------------	-------------	----	-----	----------

Part No.	Size	Quantity			List Price - A
		L1	L2		

List Price Effective: April 15, 2022

#### Angled Red Plastic Handle MPT or Comp x GHT



08SVAWMR-05MNL	1/2" x 3/4"	20	240	\$ 16.69
----------------	-------------	----	-----	----------

#### Angled Red Plastic Handle PEX x GHT



08SVAWMR-05PNL	1/2" x 3/8"	20	240	\$ 17.92
----------------	-------------	----	-----	----------

#### Angled Red Plastic Handle CPR x GHT



08SVAWMR-58CPNL	5/8" x 3/4"	20	240	\$ 17.92
-----------------	-------------	----	-----	----------

Contact your sales rep for any further information

Toll Free: 1-800-561-3164  
boshart.com